



P650HVN05.1 Comparison Table

ADP PD PM

2023/11/22

Product Specification Comparison

Model Name	P650HVN05.141	P650HVN05.143
Resolution	1920 x 1080	←
Active Area (mm)	1428.48 (H) x 803.52 (V)	←
LCM Outline (mm)	1450.38 (H) x 825.42 (V) x 50(D) D: front bezel to back bezel	←
Bezel width U/L/R/D (mm)	9.8 / 9.8 / 9.8 / 9.8	←
Brightness (typ)	2500 nits	←
Contrast Ratio (typ)	4000:1	←
Frame Rate	60Hz	←
Color Depth	10 bit (8bit + FRC)	←
Color Gamut	NTSC 72%	←
Color Temperature	10,000K	←
Polarizer	Circular POL.	←
Interface	LVDS	←
Backlight Type	DLED	←
Power Typ.	432 (W)	←
Weight	20Kg	←
LC	HT LC(-20°C~110°C)	WT LC(-40°C~110°C)

ME. Comparison

P650HVN05.141

Item		Dimension	Unit	Note
Outline Dimension	Horizontal	1450.38	mm	
	Vertical	825.42	mm	
	Depth (Dmin)	50	mm	front bezel to back bezel
	Depth (Dmax)	80	mm	to wall mount
Weight	30000		G	w/ DB


P650HVN05.143

Item		Dimension	Unit	Note
Outline Dimension	Horizontal	1450.38	mm	
	Vertical	825.42	mm	
	Depth (Dmin)	50	mm	front bezel to back bezel
	Depth (Dmax)	80	mm	to wall mount
Weight	20000		G	w/ DB


■ Dimension the same.

Drawing

P650HVN05.141

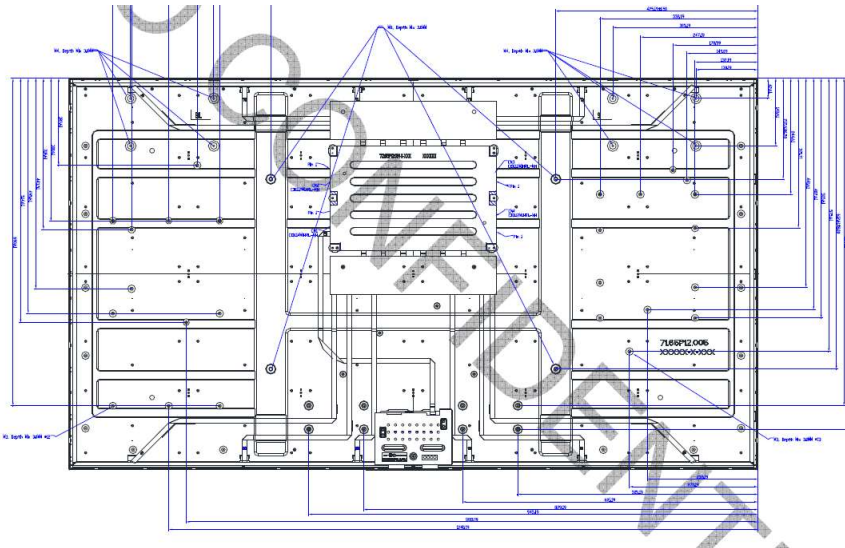

P650HVN05.143

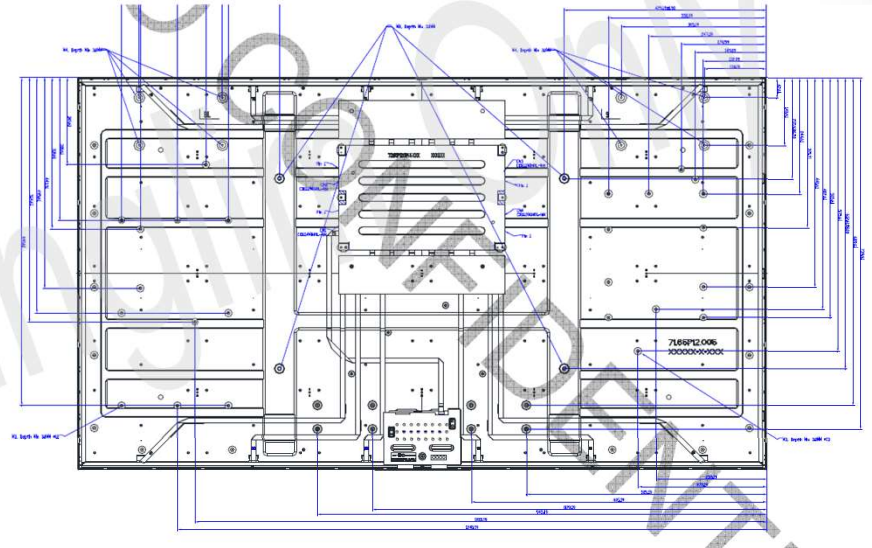

■ Drawing is the same.

Pin Assignment

P650HVN05.141

P650HVN05.143

PIN	Symbol	Description	Note	
1		N.C.	No connection (for AUO test only. Do not connect)	2
2		SCL	I2C Clock	4
3		N.C.	No connection (for AUO test only. Do not connect)	2
4		SDA	I2C Data	4
5		N.C.	No connection (for AUO test only. Do not connect)	2
6		N.C.	No connection (for AUO test only. Do not connect)	2
7		N.C.	No connection (for AUO test only. Do not connect)	2
8		N.C.	No connection (for AUO test only. Do not connect)	2
9		N.C.	No connection (for AUO test only. Do not connect)	2
10		N.C.	No connection (for AUO test only. Do not connect)	2
11		GND	Ground	
12		CH1_0-	LVDS Channel 1, Signal 0-	
13		CH1_0+	LVDS Channel 1, Signal 0+	
14		CH1_1-	LVDS Channel 1, Signal 1-	
15		CH1_1+	LVDS Channel 1, Signal 1+	
16		CH1_2-	LVDS Channel 1, Signal 2-	
17		CH1_2+	LVDS Channel 1, Signal 2+	
18		GND	Ground	
19		CH1_CLK-	LVDS Channel 1, Clock -	
20		CH1_CLK+	LVDS Channel 1, Clock +	
21		GND	Ground	
22		CH1_3-	LVDS Channel 1, Signal 3-	
23		CH1_3+	LVDS Channel 1, Signal 3+	
24		CH1_4-	LVDS Channel 1, Signal 4-	
25		CH1_4+	LVDS Channel 1, Signal 4+	
26		GND	Ground	
27		GND	Ground	
28		CH2_0-	LVDS Channel 2, Signal 0-	
29		CH2_0+	LVDS Channel 2, Signal 0+	
30		CH2_1-	LVDS Channel 2, Signal 1-	
31		CH2_1+	LVDS Channel 2, Signal 1+	
32		CH2_2-	LVDS Channel 2, Signal 2-	
33		CH2_2+	LVDS Channel 2, Signal 2+	
34		GND	Ground	
35		CH2_CLK-	LVDS Channel 2, Clock -	
36		CH2_CLK+	LVDS Channel 2, Clock +	
37		GND	Ground	
38		CH2_3-	LVDS Channel 2, Signal 3-	
39		CH2_3+	LVDS Channel 2, Signal 3+	
40		CH2_4-	LVDS Channel 2, Signal 4-	
41		CH2_4+	LVDS Channel 2, Signal 4+	
42		GND	Ground	
43		N.C.	No connection (for AUO test only. Do not connect)	2
44		GND	Ground	
45		GND	Ground	
46		GND	Ground	
47		N.C.	No connection (for AUO test only. Do not connect)	2
48		VDD	Power Supply, +12V DC Regulated	
49		VDD	Power Supply, +12V DC Regulated	
50		VDD	Power Supply, +12V DC Regulated	
51		VDD	Power Supply, +12V DC Regulated	

PIN	Symbol	Description	Note	
1		N.C.	No connection (for AUO test only. Do not connect)	2
2		SCL	I2C Clock	4
3		N.C.	No connection (for AUO test only. Do not connect)	2
4		SDA	I2C Data	4
5		N.C.	No connection (for AUO test only. Do not connect)	2
6		N.C.	No connection (for AUO test only. Do not connect)	2
7		N.C.	No connection (for AUO test only. Do not connect)	2
8		N.C.	No connection (for AUO test only. Do not connect)	2
9		N.C.	No connection (for AUO test only. Do not connect)	2
10		N.C.	No connection (for AUO test only. Do not connect)	2
11		GND	Ground	
12		CH1_0-	LVDS Channel 1, Signal 0-	
13		CH1_0+	LVDS Channel 1, Signal 0+	
14		CH1_1-	LVDS Channel 1, Signal 1-	
15		CH1_1+	LVDS Channel 1, Signal 1+	
16		CH1_2-	LVDS Channel 1, Signal 2-	
17		CH1_2+	LVDS Channel 1, Signal 2+	
18		GND	Ground	
19		CH1_CLK-	LVDS Channel 1, Clock -	
20		CH1_CLK+	LVDS Channel 1, Clock +	
21		GND	Ground	
22		CH1_3-	LVDS Channel 1, Signal 3-	
23		CH1_3+	LVDS Channel 1, Signal 3+	
24		CH1_4-	LVDS Channel 1, Signal 4-	
25		CH1_4+	LVDS Channel 1, Signal 4+	
26		GND	Ground	
27		GND	Ground	
28		CH2_0-	LVDS Channel 2, Signal 0-	
29		CH2_0+	LVDS Channel 2, Signal 0+	
30		CH2_1-	LVDS Channel 2, Signal 1-	
31		CH2_1+	LVDS Channel 2, Signal 1+	
32		CH2_2-	LVDS Channel 2, Signal 2-	
33		CH2_2+	LVDS Channel 2, Signal 2+	
34		GND	Ground	
35		CH2_CLK-	LVDS Channel 2, Clock -	
36		CH2_CLK+	LVDS Channel 2, Clock +	
37		GND	Ground	
38		CH2_3-	LVDS Channel 2, Signal 3-	
39		CH2_3+	LVDS Channel 2, Signal 3+	
40		CH2_4-	LVDS Channel 2, Signal 4-	
41		CH2_4+	LVDS Channel 2, Signal 4+	
42		GND	Ground	
43		N.C.	No connection (for AUO test only. Do not connect)	2
44		GND	Ground	
45		GND	Ground	
46		GND	Ground	
47		N.C.	No connection (for AUO test only. Do not connect)	2
48		VDD	Power Supply, +12V DC Regulated	
49		VDD	Power Supply, +12V DC Regulated	
50		VDD	Power Supply, +12V DC Regulated	
51		VDD	Power Supply, +12V DC Regulated	

- Pin Assignment are all the same.
- P650HVN05.1 is capable with Local Dimming Function.

Tap Into The Possibilities