


2027 Audi Q6 e-tron and SQ6 e-tron

Technical Specifications

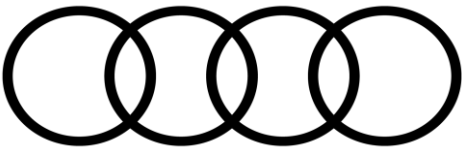

Q6 e-tron quattro®

SQ6 e-tron

Motor/Electrics ¹
Electric Motor Type
Nominal Horsepower (hp)
Peak Power w/ Launch Control (hp)

Two electric motors: Front - Asynchronous (ASM) / Rear - Permanently-Excited Synchronous (PSM)
422
456

Two electric motors: Front - Asynchronous (ASM) / Rear - Permanently-Excited Synchronous (PSM)
483
509

Battery & Charging ²
Battery Type
Battery Pack Construction
Battery Size (Gross)
Battery Size (Net)
Charge Port (Driver side)
Charge Port (Passenger side)
Max Charging Capacity AC / DC
Level 2 Charging (9.6 kW - 240V @ 40A)
DC Fast Charging (270 kW)

800V Lithium Ion
180 Prismatic Cells, 12 Modules Aluminum Battery Case Reinforced with Extruded Aluminum Cross-Sections
100 kWh
94.4 kWh
AC/DC Combo Port J1772 / CCS
AC Port J1772
up to 9.6 kW / 270 kW
12 hours
21 minutes (10% - 80% charge)

800V Lithium Ion
180 Prismatic Cells, 12 Modules Aluminum Battery Case Reinforced with Extruded Aluminum Cross-Sections
100 kWh
94.4 kWh
AC/DC Combo Port J1772 / CCS
AC Port J1772
up to 9.6 kW / 270 kW
12 hours
21 minutes (10% - 80% charge)


Drivetrain
Configuration
Driven Wheels
Transmission
Gear Ratios :1
Final

Single Front / Single Rear Motor
All-Wheel Drive
Single-Speed
9.191 (front) / 9.242 (rear)

Single Front / Single Rear Motor
All-Wheel Drive
Single-Speed
9.191 (front) / 9.242 (rear)

2027 Audi Q6 e-tron and SQ6 e-tron

Technical Specifications



Performance ³
Top Track Speed (mph) ²
Top Track Speed (kph) ²
0-60 mph (secs.) Est.
0-100 kph (secs.) Est.

130
210
4.9
5.1

143
230
4.1
4.3

Body / Chassis / Suspension
Body Construction
Suspension (standard)
Brake Construction
Front Brakes
Rear Brakes
Anti-Lock Braking System
Stability Control
Parking Brake
Drag Coefficient (Cd.)

Mixed steel/aluminum construction
5-link design front suspension // 5-link design rear suspension
Front: Fixed caliper / Rear: Floating caliper with integrated electric parking brake
Four-piston caliper 13.8" (350mm) ventilated steel discs
Single-piston caliper 13.8" (350mm) ventilated steel discs
Standard, all four wheels, with Electronic Brakeforce Distribution (EBD)
Standard Electronic Stability Control (ESC)
Electro-mechanical
0.33

Mixed steel/aluminum construction
5-link design front suspension // 5-link design rear suspension
Front: Fixed caliper / Rear: Floating caliper with integrated electric parking brake
Six-piston caliper 14.8" (375mm) ventilated steel discs
Single-piston caliper 13.8" (350mm) ventilated steel discs
Standard, all four wheels, with Electronic Brakeforce Distribution (EBD)
Standard Electronic Stability Control (ESC)
Electro-mechanical
0.32


Wheels / Tires
Wheels (Standard)
Wheels (Optional)
Wheels (Optional)
Tires (Standard)
Tires (Optional) ⁴

19" 5-double-spoke-dynamic design, bi-color
20" 5-double-spoke offset design, bi-color
20" 5-arm-structure design, bi-color
235/60 R19 107H XL front / 255/55 R19 111H XL rear all-season
255/50 R20 109H XL front / 285/45 R20 112H XL rear all-season run flat

20" 10-spoke-trapezoid design, bi-color
21" 5-Y-spoke-dynamic design, bi-color
255/50 R20 109H XL front / 285/45 R20 112H XL rear all-season run flat
255/45 R21 106W XL front / 285/40 R21 109W XL rear summer

2027 Audi Q6 e-tron and SQ6 e-tron

Technical Specifications

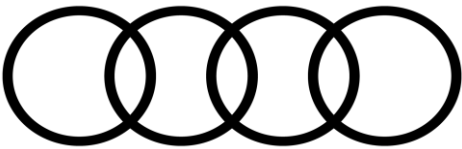

Q6 e-tron quattro®

SQ6 e-tron

Steering
Type
Turning Circle (ft. Curb-to-Curb)
Ratio :1

Electromechanical progressive steering with speed-sensitive power assist
39.7
16.3

Electromechanical progressive steering with speed-sensitive power assist
39.7
16.3

Exterior Dimensions
Wheelbase (in.)
Length (in.)
Height (in.)
Overall Width with Mirrors (in.)
Overall Width without Mirrors (in.)
Curb Weight (lbs.)
Towing Capacity (lbs.)

113.7
187.8
66.6
86.3
76.3
5,236
4,400

113.8
187.9
66.8
86.3
76.3
5,390
4,400


Interior Dimensions
EPA Class
Seating
Headroom, Front (in.)
Headroom, Rear (in.)
Legroom, Front (in.)
Legroom, Rear (in.)
Shoulder Room, Front (in.)
Shoulder Room, Rear (in.)
Cargo Volume Behind Row 1 / Row 2 (cu. ft.)

SUV
5
38.5
38.4
39.8
37.4
58.7
56.8
30.2 / 60.2

SUV
5
38.5
38.4
39.4
37.4
58.7
56.8
30.2 / 60.4

2027 Audi Q6 e-tron and SQ6 e-tron

Technical Specifications

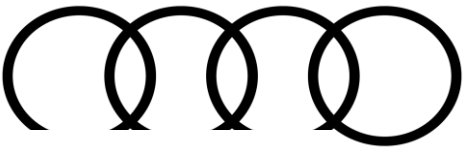

Efficiency ⁵
EPA Estimated Range (Mi.)
MPG/MPGe (City)
MPG/MPGe (Highway)
MPG/MPGe (Combined)
EPA Rating

325 (w/19" wheel)
110 (w/19" wheel)
97 (w/19" wheel)
104 (w/19" wheel)
ZEV

285 (w/20" wheel)
97 (w/20" wheel)
87 (w/20" wheel)
92 (w/20" wheel)
ZEV

New Owner Benefits ⁶
Scheduled Maintenance
Roadside Assistance
New Vehicle Limited Warranty
High Voltage Battery Limited Warranty

First 3 years / 30,000 mi. of ownership, whichever occurs first
4 year / Unlimited mileage
4 year / 50,000 mi., whichever occurs first
8 Years / 100,000 Miles (whichever occurs first), 70% retention of battery capacity

First 3 years / 30,000 mi. of ownership, whichever occurs first
4 year / Unlimited mileage
4 year / 50,000 mi., whichever occurs first
8 Years / 100,000 Miles (whichever occurs first), 70% retention of battery capacity

Pricing ⁷
Starting MSRP (USD)
Destination and Delivery (USD)
Total Starting MSRP (USD)

\$64,500
\$1,395
\$65,895

\$73,200
\$1,395
\$74,595

Additional notes

¹ Maximum HP calculated via peak performance of the electric motor(s) at peak battery power, and is only available under certain limited conditions, including, but not limited to, battery temperature and state of charge. Your results will vary. See Owner’s Manual for further details and limitations.

² Charging times will vary and depend on a variety of factors, including ambient temperature, charger type, battery condition and initial state of charge, vehicle condition and others. Frequent and consecutive fast charging can permanently decrease battery capacity.

³ Always obey all local speed and traffic laws. Top track speed electronically limited in U.S.

⁴ Summer performance tires may ride less comfortably, make more noise, and wear more quickly than other choices. To avoid tire, rim, or vehicle damage, it is important that inflation pressure is regularly checked and maintained at optimum levels. High-performance tires are designed for optimum performance and handling in warm climates and are not suitable for cold, snowy, or icy weather conditions. When driving during cold, snowy, or icy weather conditions, ensure that your vehicle is equipped with appropriate all-season or winter weather tires. Tires are supplied and warranted by their manufacturer.

⁵ 2027 Audi Q6 e-tron EPA estimated range is 325 miles (w/19" wheel). 2027 Audi SQ6 e-tron EPA estimated range is 285 miles (w/20" wheel). Actual range and mileage will vary and depend on several factors including driving and charging habits, accessory use, temperature and topography, battery age, load, and vehicle condition. Battery capacity decreases with time and use. See owner’s manual for details.

⁶ Additional details and coverage information for Audi Signature Care scheduled maintenance are provided within the 2027 Warranty and Maintenance booklet. Audi Signature Care honored at all authorized U.S. Audi dealerships. Actual scheduled maintenance services vary based on vehicle model, model year, and mileage. See vehicle Owner’s Manual for details. Replacement parts and labor may cost additional. Roadside Assistance provided by an authorized third party. May require additional payment for services rendered. Visit <https://www.audiusa.com/en/support/help/roadside-assistance/> for covered services, limitations and additional details. 4 years/50,000 miles (whichever occurs first) New Vehicle Limited Warranty on all new MY27 Q6/SQ6 e-tron vehicles. See owner’s literature or dealer for warranty exclusions and limitations.

⁷ Starting MSRP pricing excludes destination, taxes, title, other options and dealer charges. Dealer sets actual price.