AIRNAV.COM

EVEREST FUEL Powerful Savings & Comprehensive Service GET STARTED

Airports | Navaids | Airspace Fixes | Aviation Fuel | Hotels | iPhone App | My AirNav

2532 users online LOGIN

KLAX Los Angeles International Airport
Los Angeles, California, USA

GOING TO LOS ANGELES?

Super 8 BY WYNDHAM Reserve a **Hotel Room**


Hertz Reserve Online

FAA INFORMATION EFFECTIVE 01 OCTOBER 2026

Location

FAA Identifier: LAX
Lat/Long: 33-56-32.9870N 118-24-28.9750W
33-56.549783N 118-24.482917W
33.9424964,-118.4080486
(estimated)
Elevation: 127.8 ft. / 39.0 m (surveyed)
Variation: 12E (2020)
From city: 9 miles SW of LOS ANGELES, CA
Time zone: UTC -7 (UTC -8 during Standard Time)
Zip code: 90009

Loc | Ops | Rwys | IFR | FBO | Links
Com | Nav | Svcs | Stats | Notes

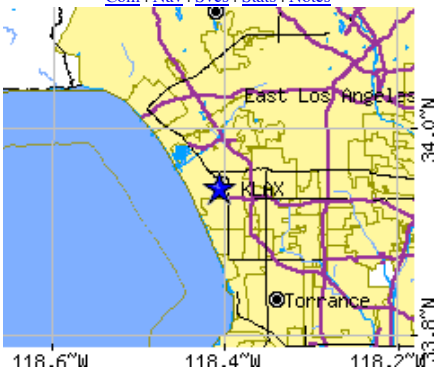

Road maps at: MapQuest Bing Google

Airport Operations

Airport use: Open to the public
Activation date: 04/1940
Control tower: yes
ARTCC: LOS ANGELES CENTER
FSS: HAWTHORNE FLIGHT SERVICE STATION
NOTAMs facility: LAX (NOTAM-D service available)
Attendance: CONTINUOUS
Wind indicator: lighted
Segmented circle: no
Beacon: white-green (lighted land airport)
Operates sunset to sunrise.
Fire and rescue: ARFF index E
International operations: customs landing rights airport

Aerial photo

WARNING: Photo may not be current or correct



Photo by Mark Holtzman
West Coast Aerial Photography
Photo taken 26-Mar-2020
looking west.

Do you have a better or more recent aerial photo of Los Angeles International Airport that you would like to share? If so, please **send us your photo**.

Airport Communications

UNICOM: 122.95
WX ASOS: PHONE 310-602-6051
LOS ANGELES GROUND: 121.4 ;WEST 121.65 ;NORTH-CMPLX 121.75 ;SOUTH CMPLX 327.0
LOS ANGELES TOWER: 119.8 ;HELICOPTERS 120.95 ;SOUTH CMPLX 133.9 ;NORTH CMPLX 239.3 ;NORTH CMPLX & HELI 379.1 ;SOUTH CMPLX
SOCAL APPROACH: 124.3 ;APCH FM WEST/DEP TO WEST 124.5 ;225-044 LAX 124.9 ;090-224 LAX 128.5 ;045-

Sectional chart

089 LAX
SOCAL DEPARTURE: 124.3 ;045-224 LAX 124.3 ;APCH FM WEST/DEP TO WEST 125.2 ;225-044 LAX
CLEARANCE DELIVERY: 120.35 327.0
ANJLL STAR: 124.05
BAYST STAR: 124.5
BIGBR STAR: 124.05
BOGET STAR: 135.05
BRUEN STAR: 124.05
CATALINA DP: 124.3
CHATY DP: 125.2
CLASS B: 124.3 124.5 124.9 125.2 127.4
D-ATIS: 133.8 ;ARR 135.65 ;DEP
DARRK DP: 125.2
DIRBY STAR: 127.4
DOTSS DP: 124.3
EMERG: 121.5 243.0
GARDY DP: 125.2
GOATZ STAR: 127.4
GORMAN DP: 125.2
HLYWD STAR: 124.05
HUULL STAR: 124.5
IC: 120.95 ;SOUTH CMPLX 133.9 ;NORTH CMPLX 239.3 ;NORTH CMPLX & HELI 379.1 ;SOUTH CMPLX
IRNMN STAR: 124.5
KIMMO STAR: 119.85
KYLOW DP: 124.3
LADYJ DP: 125.2
LAXX DP: 124.3
LEENA STAR: 127.4
MDNYT STAR: 124.05
MOOOS DP: 125.2
MUELR DP: 125.2
OLAAA STAR: 128.1
OPS: 372.2 ;SAMSO FLT OPS
ORCKA DP: 124.3
OSHNN DP: 124.3
PERCH DP: 125.2
PNDAH DP: 124.3
RAMP CTL: 129.325 ;TXL C10 0630L-2330L 129.4 ;TXL C7 0600L-2300L 129.5 ;TXL C6 0600L-2300L 130.5 ;TXL C9 0530L-2230L 130.85 ;TXL C8 0500L-2359L 131.45 ;TXL D9
RYDRR STAR: 124.5
SEAL BEACH DP: 124.3
SEBBY DP: 124.3
SFRA: 128.55
SKWRL DP: 125.2
SNSTT STAR: 124.05
STHBY DP: 124.3
SUMMR DP: 125.2
TRTON DP: 124.3
VENTURA DP: 125.2
WAYVE STAR: 119.85
WNNDY DP: 125.2
ZILLI DP: 124.3
ZUUMA STAR: 128.5
WX ASOS at HHR (4 nm E): PHONE 310-973-8930
WX ASOS at SMO (5 nm NW): PHONE 310-309-5134



Airport diagram

CAUTION: Diagram may not be current



Download PDF
of official airport diagram from the FAA

Airport distance calculator

Flying to Los Angeles International Airport? Find the distance to fly.

From to KLAX
CALCULATE DISTANCE

Sunrise and sunset

Times for 23-Oct-2026

	Local (UTC-7)	Zulu (UTC)
Morning civil twilight	06:41	13:41
Sunrise	07:06	14:06
Sunset	18:10	01:10
Evening civil twilight	18:35	01:35

Current date and time

Zulu (UTC)	24-Oct-2026 00:16:50
Local (UTC-7)	23-Oct-2026 17:16:50

METAR

KLAX	232353Z 27013KT 10SM FEW060 SCT095 21/13 A2990 RMK AO2 SLP122 T02110133 10222 20206 56014
KHHR 4nm SE	232353Z 29006KT 10SM FEW100 22/13 A2990 RMK AO2 SLP123 T02170133 10228 20200 56013
KSMO 5nm NW	232351Z 26007KT 230V290 10SM FEW100 21/13 A2990 RMK AO2 SLP123 T02110128 10217 20194 56014 $

WX AWOS-3PT at CPM (9 nm E): 127.150 (310-631-3022)
WX AWOS-3PT at TOA (9 nm S): PHONE 310-534-2847
WX ASOS at LGB (15 nm SE): PHONE 562-247-0378
WX ASOS at BUR (16 nm N): PHONE 818-841-1384
WX ASOS at VNY (17 nm N): PHONE 818-464-9794
WX AWOS-3PT at WHP (19 nm N): 132.1 (818-899-9820)

- LOS ANGELES ARTCC FREQS 128.2/351.7(NORTHEAST ABV 7000); 134.75/285.5(EAST ABV 7000); 132.85/322.4(SOUTHEAST ABV 7000) USED FOR CLASS B.
- ASDE-X IN USE. OPERATE TRANSPONDERS WITH ALTITUDE REPORTING MODE AND ADS-B (IF EQUIPPED) ENABLED ON ALL AIRPORT SURFACES.

Nearby radio navigation aids

VOR radial/distance	VOR name	Freq	Var
LAXr050/1.3	LOS ANGELES VORTAC	113.60	15E
SMOr134/4.7	SANTA MONICA VOR/DME	110.80	15E
VNYr151/17.4	VAN NUYS VOR/DME	113.10	15E
SLIr283/20.0	SEAL BEACH VORTAC	115.70	15E
POMr240/31.9	POMONA VORTAC	110.40	15E
VTUr093/33.5	VENTURA VOR/DME	116.55	15E
SXCr346/34.1	SANTA CATALINA VORTAC	114.15	15E
FIMr122/34.2	FILLMORE VORTAC	112.50	15E
ELBr281/37.3	EL TORO VOR/DME	117.20	14E
CMAr100/37.8	CAMARILLO VOR/DME	116.85	15E

Airport Services

Fuel available: A
Parking: tiedowns
Airframe service: MAJOR
Powerplant service: MAJOR
Bottled oxygen: HIGH
Bulk oxygen: HIGH

Runway Information

Runway 7L/25R

Dimensions: 12923 x 150 ft. / 3939 x 46 m
Surface: concrete/grooved, in good condition
Weight bearing capacity: PCN PCR/870 /R/A/W/T
Single wheel: 120.0
Double wheel: 250.0
Double tandem: 550.0
Dual double tandem: 1110.0
Runway edge lights: high intensity

	RUNWAY 7L	RUNWAY 25R
Latitude:	33-56.133107N	33-56.392673N
Longitude:	118-25.323892W	118-22.786675W
Elevation:	114.8 ft.	94.3 ft.
Traffic pattern:	right	left
Runway heading:	071 magnetic, 083 true	251 magnetic, 263 true
Displaced threshold:	832 ft.	957 ft.
Declared distances:	TORA:12091 TODA:12091 ASDA:12091 LDA:11259	TORA:12091 TODA:12091 ASDA:12091 LDA:11134
Markings:	precision, in good condition	precision, in good condition
Visual slope indicator:	4-light PAPI on left (3.00 degrees glide path)	4-light PAPI on left (3.00 degrees glide path)

KTOA 11nm SE 232347Z 28009KT 10SM FEW090 21/15 A2990
KLGB 15nm SE 232353Z 27007KT 10SM CLR 22/13 A2989 RMK AO2 SLP120 T02170128 10228 20200 56013 $
KBUR 16nm N 232353Z 18008KT 10SM FEW050 BKN060 BKN100 20/12 A2990 RMK AO2 SLP115 T02000122 10222 20183 56010
KVNY 17nm N 232351Z 26004KT 10SM FEW060 SCT070 OVC090 21/11 A2988 RMK AO2 SLP113 T02110111 10222 20183 56013
KWHP 18nm N 232355Z 00000KT 10SM //// 21/09 A2991

TAF

KLAX 231720Z 2318/2424 VRB03KT P6SM SCT035 FM231900 26008KT P6SM SCT050 FM232100 26010G16KT P6SM SCT050 FM240200 26007KT P6SM SKC FM241500 09004KT P6SM SKC FM241900 26006KT P6SM SKC FM242100 26012KT P6SM SKC
KSMO 5nm NW 231720Z 2318/2418 22008KT P6SM BKN050 FM232100 25008G15KT P6SM BKN050 FM240100 25006KT P6SM FEW100 FM240300 VRB03KT P6SM SKC
KLGB 15nm SE 231720Z 2318/2418 VRB03KT P6SM SCT030 FM232000 21007KT P6SM SCT050 FM232300 29010KT P6SM SCT050 FM240300 VRB03KT P6SM SKC
KBUR 16nm N 231720Z 2318/2418 VRB03KT P6SM BKN040 FM232100 20008KT P6SM SCT050 FM240100 32005KT P6SM SCT050 FM240400 VRB03KT P6SM SKC
KVNY 17nm N 231720Z 2318/2418 VRB03KT P6SM BKN040 FM232100 24006KT P6SM SCT050 FM240000 34006KT P6SM SCT050 FM240700 36007KT P6SM SKC

NOTAMs

Click for the latest **NOTAMs**
NOTAMs are issued by the DoD/FAA and will open in a separate window not controlled by AirNav.

RVR equipment:	touchdown, midfield, rollout	touchdown, midfield, rollout
Approach lights:	MALSR: 1,400 foot medium intensity approach lighting system with runway alignment indicator lights	MALSR: 1,400 foot medium intensity approach lighting system with runway alignment indicator lights
Runway end identifier lights:	no	no
Centerline lights:	yes	yes
Touchdown point:	yes, lighted	yes, no lights
Instrument approach:	ILS/DME	ILS/DME
Obstructions:	none	25 ft. rr, lighted, 325 ft. from runway, 5:1 slope to clear 14 FT BLAST FENCE AT 180 FT.

Runway 7R/25L

Dimensions:	11095 x 200 ft. / 3382 x 61 m	
Surface:	asphalt/concrete/grooved, in good condition	
Weight bearing capacity:	PCN PCR/1070/R/A/W/T	
	Single wheel: 120.0	
	Double wheel: 250.0	
	Double tandem: 550.0	
	Dual double tandem: 1120.0	
Runway edge lights:	high intensity	
	RUNWAY 7R	**RUNWAY 25L**
Latitude:	33-56.018963N	33-56.241782N
Longitude:	118-25.141100W	118-22.962835W
Elevation:	121.7 ft.	97.8 ft.
Traffic pattern:	right	left
Runway heading:	071 magnetic, 083 true	251 magnetic, 263 true
Declared distances:	TORA:11095 TODA:11095 ASDA:11095 LDA:11095	TORA:11095 TODA:11095 ASDA:11095 LDA:11095
Markings:	precision, in good condition	precision, in good condition
Visual slope indicator:	4-light PAPI on left (3.00 degrees glide path)	4-light PAPI on right (3.00 degrees glide path)
RVR equipment:	touchdown, midfield, rollout	touchdown, midfield, rollout
Approach lights:	MALSR: 1,400 foot medium intensity approach lighting system with runway alignment indicator lights	ALSF2: standard 2,400 foot high intensity approach lighting system with centerline sequenced flashers (category II or III) ALSF2 OPERATES AS SSALR TILL WX GOES BELOW VFR.
Runway end identifier lights:	no	no
Centerline lights:	yes	yes
Touchdown point:	yes, no lights	yes, lighted
Instrument approach:	ILS/DME	ILS/DME
Obstructions:	67 ft. pole, 2400 ft. from runway, 825 ft. right of centerline, 32:1 slope to clear	21 ft. rr, 1150 ft. from runway, 600 ft. left of centerline, 45:1 slope to clear

Runway 6R/24L

Dimensions:	10885 x 150 ft. / 3318 x 46 m	
Surface:	concrete/grooved, in good condition	
Weight bearing capacity:	PCN PCR/980 /R/A/W/T	
	Single wheel: 120.0	
	Double wheel: 250.0	
	Double tandem: 550.0	
	Dual double tandem: 1120.0	
Runway edge lights:	high intensity	
	RUNWAY 6R	**RUNWAY 24L**
Latitude:	33-56.808947N	33-57.027797N
Longitude:	118-26.080070W	118-23.942760W
Elevation:	109.9 ft.	112.9 ft.
Traffic pattern:	left	right
Runway heading:	071 magnetic, 083 true	251 magnetic, 263 true
Displaced threshold:	537 ft.	801 ft.
Declared distances:	TORA:10285 TODA:10285 ASDA:10285 LDA:9748	TORA:10285 TODA:10285 ASDA:10285 LDA:9483
Markings:	precision, in good condition	precision, in good condition
Visual slope indicator:	4-light PAPI on left (3.00 degrees glide path)	4-light PAPI on right (3.00 degrees glide path)
RVR equipment:	touchdown, midfield, rollout	touchdown, midfield, rollout
Approach lights:	MALSR: 1,400 foot medium intensity approach lighting system with runway alignment indicator lights	MALSR: 1,400 foot medium intensity approach lighting system with runway alignment indicator lights
Runway end identifier lights:	no	no
Centerline lights:	yes	yes
Touchdown point:	yes, lighted	yes, no lights
Instrument approach:	ILS/DME	ILS/DME
Obstructions:	9 ft. pole, 275 ft. from runway, 375 ft. right of centerline, 8:1 slope to clear APCH RATIO 50:1 TO DSPLCD THR.	none ALS LIGHT BENCH AT 200'.

Runway 6L/24R

Dimensions:	8926 x 150 ft. / 2721 x 46 m	
Surface:	asphalt/concrete/grooved, in good condition	
Weight bearing capacity:	PCN PCR/610 /R/A/W/T	
	Single wheel: 120.0	
	Double wheel: 203.0	
	Double tandem: 383.0	
	Dual double tandem: 880.0	
Runway edge lights:	high intensity	
	RUNWAY 6L	**RUNWAY 24R**
Latitude:	33-56.946748N	33-57.126235N
Longitude:	118-25.869592W	118-24.116935W
Elevation:	113.1 ft.	118.9 ft.
Traffic pattern:	left	right
Runway heading:	071 magnetic, 083 true	251 magnetic, 263 true
Declared distances:	TORA:8926 TODA:8926 ASDA:8566 LDA:8566	TORA:8926 TODA:8926 ASDA:8926 LDA:8926
Markings:	precision, in good condition	precision, in good condition
Visual slope indicator:	4-light PAPI on left (3.00 degrees glide path)	4-light PAPI on left (3.00 degrees glide path)
RVR equipment:	touchdown, midfield, rollout	touchdown, midfield, rollout

Approach lights:	MALSR: 1,400 foot medium intensity approach lighting system with runway alignment indicator lights	ALSF2: standard 2,400 foot high intensity approach lighting system with centerline sequenced flashers (category II or III) ALSF2 OPERATES AS SSALR TILL WX GOES BELOW VFR.
Runway end identifier lights:	no	no
Centerline lights:	yes	yes
Touchdown point:	yes, no lights	yes, lighted
Instrument approach:	ILS/DME	ILS/DME
Obstructions:	61 ft. pole, 3000 ft. from runway, 300 ft. left of centerline, 45:1 slope to clear	42 ft. sign, lighted, 1700 ft. from runway, 350 ft. right of centerline, 35:1 slope to clear

Airport Ownership and Management from official FAA records

Ownership: Publicly-owned
Owner: CITY OF LOS ANGELES
1 WORLD WAY BOX 92216
LOS ANGELES, CA 90009-2216
Phone 424-646-5292
ARPT OPNS 24 HRS. (424) 646-5292.
Manager: DOUGLAS WEBSTER
ONE WORLD WAY
LOS ANGELES, CA 90009
Phone 424-646-5292
LAX ARPT OPNS - CARY BUCHANAN 424-646-8257.

Additional Remarks

- NOISE SENS ARPT ON WESTERLY TAKEOFFS NO TURNS BEFORE CROSSING SHORELINE OVER-OCEAN APCHS UTILIZED 0000-0630.
- PRACTICE INSTRUMENT APPROACHES & TOUCH AND GO LANDINGS ARE PROHIBITED.

- NMRS BIRDS ON AND IN VCNTY OF ARPT.

- RWY 7R/25L PREFERRED EMERG RWY.

- SIMUL ACFT OPNS PROHIBITED ON TWYS L AND H9 BTWN RWYS 07L/25R AND 07R/25L.

- TURB MAY BE DEFLECTED UPWARD FM THE BLAST FENCE 180 FT E OF RWY 25R.

- SIMUL ACFT OPNS PROHIBITED ON TWY H2 AND G BTN RWYS 07L/25R AND 07R/25L.

- MILITARY RSTD: ALL MIL ACFT OFFL BUS ONLY, MIN 24 HR PPR, CTC 61 ABW/CP FLT OPS DSN 633-3779/4014, C310-653-3779/4014.
- MILITARY AF: ALL MIL AIRCREWS MUST CTC 61 ABW/CP FLT OPS FOR PRKG LCTN/INSTRNS. NO GOVT TRNSPN, QTRS OR SECURITY AVBL. VIP NOTIFICATION PROCS APPLY. USER FEES ASSESSED USING AVCARD CREDIT. CTC SIGNATURE FLIGHT SUPPORT FBO 130.6 INBD. INBD RELAY ETA, VIP CODE, SVC REQ 30 MIN PRIOR TO ARR.
- TWY D BTN TWY D7 AND D8 (N OF TRML ONE) CLSD TO ACFT WITH WINGSPAN GTR THAN 157 FT.
- WEST REMOTE GATES: ACFT USE OF OPEN GATES AS TAXI PATH IS PROHIBITED (GATES 406, 407, 408, 409).
- ACFT USE MINIMAL PWR WHEN TXG VCNTY TRMLS DUE BLAST HAZ.

- FOR ACFT WITH WINGSPAN GTR THAN 214 FT CTC LAX AIRSIDE OPS (424)-646-5292 FOR ARPT RESTRICTIONS.
- MAJOR CONSTRUCTION ON AIRPORT, DAILY.

- AMERICAN EAGLE TRML SOUTHBOUND TAXING ACFT USE MNM PWR DUE TO BLAST HAZ.

- SBND TURN NOT AVBL FROM WEST REMOTE GATE 408 AND WEST REMOTE GATE 409

- ANY ACFT THAT COMES TO A STOP OR HAS ITS MOMENTUM INTRPD WHILE TURNING AND TAXING INTO ITS PRKG PSN, MUST STOP AND BE TOWED.
- ACFT WITH LEN GTR THAN 240 FT ARE PROHIBITED ON TXLS C7 AND C9 BTN TXL C AND TWY B.
- ACFT WITH WINGSPAN GTR THAN 198 FT OBND FM TXL D8 MAY NOT TURN WBND ONTO TXL D.
- RWY STATUS LGTS IN OPN.

- ACFT WITH WINGSPAN GTR THAN 155 FT WB ON TXL C ARE NOT AUTHD TO MAKE LEFT TURN ON TWY C10 UNDER PWR.
- PILOTS SHOULD USE CTN FOR POSS LASER ACT IN THE LAX AREA.

- LAX SVC TXL K AND TXL L LAWA RAMP TWR OPN CTC CITY RAMP TWR 131.075.

- LAX SVC TXL M AND TXL C13 LAWA RAMP TWR OPN CTC CITY RAMP TWR 131.975.

- LAX TWY V, W, Y USE CTN ON FWD EXIT SPEED. RWY INCURSION RISK. LTD DIST BTN RWYS.
- PILOTS CONDUCTING EFVS OPS; BE AWARE LED ALS IN USE RWY 7R.

Instrument Procedures

NOTE: All procedures below are presented as PDF files. If you need a reader for these files, you should download the free Adobe Reader.

NOT FOR NAVIGATION. Please procure official charts for flight.
FAA instrument procedures published for use from 01 October 2026 at 0901Z to 29 October 2026 at 0900Z.

STARs - Standard Terminal Arrivals

ANJLL FOUR (RNAV)	download (266KB)
BASET FIVE **CHANGED**	2 pages: [1] [2] (470KB)
BAYST ONE (RNAV)	2 pages: [1] [2] (465KB)
BIGBR THREE (RNAV)	2 pages: [1] [2] (514KB)
BOGET TWO (RNAV)	download (291KB)
BRUEN TWO (RNAV)	2 pages: [1] [2] (522KB)
DIRBY TWO (RNAV)	download (250KB)
GOATZ TWO (RNAV)	download (213KB)
HLYWD ONE (RNAV)	2 pages: [1] [2] (372KB)
HUULL TWO (RNAV)	download (260KB)
IRNMN TWO (RNAV)	2 pages: [1] [2] (409KB)
KIMMO THREE **CHANGED**	2 pages: [1] [2] (325KB)
LEENA EIGHT	download (213KB)
MDNYT TWO (RNAV)	2 pages: [1] [2] (541KB)
MOORPARK FOUR **CHANGED**	download (211KB)
OCEAN THREE **CHANGED**	download (203KB)
OLAAA TWO (RNAV)	download (239KB)
RYDRR TWO (RNAV)	2 pages: [1] [2] (416KB)
SADDE EIGHT **CHANGED**	2 pages: [1] [2] (398KB)
SEAVU TWO **CHANGED**	download (184KB)
SNSTT TWO (RNAV)	download (225KB)
VISTA THREE **CHANGED**	download (208KB)
WAYVE ONE (RNAV)	download (194KB)
ZUUMA FOUR (RNAV)	download (248KB)

IAPs - Instrument Approach Procedures

ILS OR LOC RWY 06L	download (386KB)
ILS OR LOC RWY 06R	download (393KB)
ILS OR LOC RWY 07L	download (377KB)

ILS OR LOC RWY 07R	download (353KB)
ILS OR LOC RWY 24L **CHANGED**	download (602KB)
ILS OR LOC RWY 24R **CHANGED**	download (555KB)
ILS OR LOC RWY 25L	download (551KB)
ILS OR LOC RWY 25R	download (529KB)
ILS RWY 24R (CAT II - III) **CHANGED**	download (554KB)
ILS RWY 25L (CAT II - III)	download (552KB)
RNAV (RNP) Z RWY 06L	download (319KB)
RNAV (RNP) Z RWY 06R	download (321KB)
RNAV (RNP) Z RWY 07L	download (318KB)
RNAV (RNP) Z RWY 07R	download (312KB)
RNAV (RNP) Z RWY 24L **CHANGED**	download (325KB)
RNAV (RNP) Z RWY 24R	download (347KB)
RNAV (RNP) Z RWY 25L	download (589KB)
RNAV (RNP) Z RWY 25R	download (428KB)
RNAV (GPS) Y RWY 06L	download (331KB)
RNAV (GPS) Y RWY 06R	download (349KB)
RNAV (GPS) Y RWY 07L	download (326KB)
RNAV (GPS) Y RWY 07R	download (331KB)
RNAV (GPS) Y RWY 24L	download (609KB)
RNAV (GPS) Y RWY 24R	download (565KB)
RNAV (GPS) Y RWY 25L	download (534KB)
RNAV (GPS) Y RWY 25R	download (444KB)

Departure Procedures

CATALINA EIGHT	download (197KB)
CHATY FIVE **CHANGED**	2 pages: [1] [2] (376KB)
DARRK THREE (RNAV)	2 pages: [1] [2] (443KB)
DOTSS TWO (RNAV)	2 pages: [1] [2] (402KB)
GARDY FOUR (RNAV)	2 pages: [1] [2] (421KB)
GORMAN SEVEN **CHANGED**	download (308KB)
KYLOW ONE (RNAV)	2 pages: [1] [2] (619KB)
LADYJ FOUR (RNAV)	2 pages: [1] [2] (444KB)
LAXX ONE **CHANGED**	2 pages: [1] [2] (542KB)
MOOOS TWO (RNAV)	download (229KB)
MUELR FOUR (RNAV)	2 pages: [1] [2] (377KB)
ORCKA FIVE (RNAV)	2 pages: [1] [2] (571KB)
OSHNN ONE (RNAV)	2 pages: [1] [2] (409KB)
PERCH THREE **CHANGED**	download (276KB)
PNDAH TWO (RNAV)	2 pages: [1] [2] (350KB)
SEAL BEACH EIGHT	download (222KB)
SEBBY THREE	download (244KB)
SKWRL TWO (RNAV)	download (241KB)
STHBY ONE (RNAV)	2 pages: [1] [2] (590KB)
SUMMR TWO (RNAV)	2 pages: [1] [2] (478KB)
TRTON THREE (RNAV)	2 pages: [1] [2] (387KB)
VENTURA EIGHT **CHANGED**	download (230KB)
WNNDY THREE (RNAV)	2 pages: [1] [2] (355KB)
ZILLI FIVE (RNAV)	2 pages: [1] [2] (395KB)
NOTE: Special Take-Off Minimums/Departure Procedures apply	download (544KB)

Other nearby airports with instrument procedures:

KHHR - Jack Northrop Field/Hawthorne Municipal Airport (4 nm E)
KSMO - Santa Monica Municipal Airport (5 nm NW)
KTOA - Zamperini Field Airport (9 nm S)
KLGB - Long Beach Airport (Daugherty Field) (15 nm SE)
KBUR - Hollywood Burbank Airport (16 nm N)
KVNY - Van Nuys Airport (17 nm N)

KWHP - Whiteman Airport (19 nm N)
KSLI - Los Alamitos Army Airfield (20 nm SE)

FBO, Fuel Providers, and Aircraft Ground Support

Business Name	Contact	Services / Description	Fuel Prices	Comments
ATLANTIC	**ASRI 131.60** 310-258-9884 [web site] [email]	Atlantic Aviation is your premier aviation service provider with more than 100 locations in North America, including Hawaii and the Caribbean. We provide standard ground services you'd expect, with a detailed focus on ensuring an unforgettable customer experience. More info and **photos** of Atlantic Aviation U.S. Customs · SAF SUSTAINABLE AVIATION FUEL · MULTI SERVICE AVIATION · CONTRACT FUEL · Hertz	independent Jet A SAF FS $13.32 $14.18 Updated 23-Oct-2026	not yet rated write
SIGNATURE AVIATION	**ASRI 130.60** 310-410-9605 [web site] [email]	Signature at Los Angeles Int'l Airport (LAX) provides premier private aviation terminal services for the Los Angeles region. Ideally situated for convenient access to the city's business hubs, our FBO places you within reach of Warner Brothers and Universal Studios. To request or manage your reservation at Signature LAX, please log in to Signature Vision on our website: https://www.signatureaviation.com/services/signature-vision. More info and **photos** of Signature Aviation SAF SUSTAINABLE AVIATION FUEL · MULTI SERVICE AVIATION · GO RENTALS	independent Jet A SAF FS $13.12 $14.94 Updated 23-Oct-2026	not yet rated write

FS=Full service
UPDATE PRICES

Getting Around: Taxi, Limo, Rental Cars, Mass Transit

Business Name	Contact	Services / Description	Comments
MTA Metro Rail, Green Line	213-620-7245	no information available If you are affiliated with MTA Metro Rail, Green Line and would like to show here your services, contact info, web link, logo, and more, click here	not yet rated write

Would you like to see your business listed on this page?

If your business provides an interesting product or service to pilots, flight crews, aircraft, or users of the Los Angeles International Airport, you should consider listing it here. To start the listing process, click on the button below

ADD YOUR BUSINESS OR SERVICE

Other Pages about Los Angeles International Airport

www.lawa.org/welcomelax.aspx
www.airport-la.com

UPDATE, REMOVE OR ADD A LINK

Copyright © AirNav, LLC. All rights reserved.