ADIMEM

PURITY REDEFINED

(A Division of Vipul Organics Limited)

Making Membranes in India
For the World



MAKE IN INDIA

VIPULORGANICS

Interconnected Chemistry

ADIMEM
PURITY REDEFINED

About Adimem

ADIMEM is the membrane manufacturing division of **Vipul Organics Limited,** dedicated to developing advanced membrane technologies for water and wastewater treatment. Building on membrane research initiated by Vipul Organics Limited in 2017, ADIMEM has evolved into a fully integrated manufacturer of high-performance membrane products and systems.

From its state-of-the-art manufacturing facility at Saykha, Gujarat. ADIMEM designs, develops, and manufactures **Microfiltrtion (MF), Ultrafiltration (UF), Nanofiltration (NF), Reverse Osmosis (RO) and Membrane Bioreactor (MBR) solutions for industrial, municipal, and process water applications.**

Guided by our philosophy, **"Making Membranes in India for the World,"** we combine innovation, engineering excellence, and manufacturing expertise to deliver reliable, sustainable, and application-driven membrane solutions that help customers achieve superior treatment performance and long-term operational reliability



Actual Image of Adimem's Manufacturing Line

World-class, Locally Crafted

We fuse the strength of domestic manufacturing with uncompromising global quality standards, delivering solutions that resonate worldwide

Customer-Driven

Innovation Your challenges are our blueprint. We craft customized solutions, precisely tailored to your industry's unique and evolving needs

Technology for Sustainability

Our membranes are engineered to conserve vital resources & exceed environmental compliance, making sustainability an operational reality

Redefining Membrane Technology
RPTx™ (Reverse Phase Transition)

Adimem Technologies has redefined membrane manufacturing through its **"Reverse Phase Transition (RPTx™) Technology",** a blend of NIPS and TIPS techniques that enables precise control over phase inversion kinetics. Membranes manufactured using RPT Technology offer controlled pore-size distribution, high permeate flux, strong mechanical performance and efficient filtration and separation. These characteristics make them suitable for a wide range of water, wastewater, process-liquid and industrial separation applications




POLYMER SOLUTION
Homogeneous polymer solution is prepared with precisely selected solvents and additives




PRECISE CASTING
The solution is cast as a uniform thin film with tight control of thickness



RPT PHASE TRANSITION
A blend of non-solvent and thermal triggers phase transition in a controlled manner




PORE FORMATION
Interconnected, uniform pores are formed throughout the membrane matrix




MEMBRANE FORMED
The membrane is conditioned for enhanced stability, strength and performance

Membrane Filtration of Storm Water

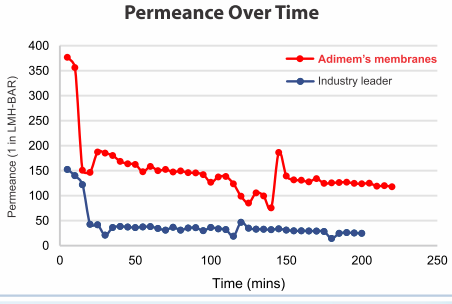



Membrane Structure (Cross-Section)

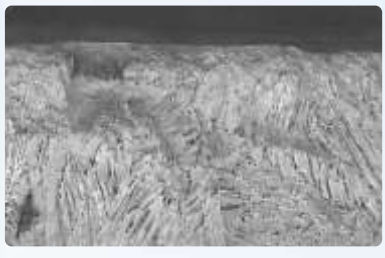

Structure Benefits

- **Highly interconnected pores**
- **Uniform pore size distribution**
- **High surface porosity**
- **Strong mechanical structure**
- **Low fouling & easy cleaning**

Key Advantages

Higher Flux

Optimized pore structure provides higher permeability and productivity


Enhanced Durability

Stronger membrane matrix withstands tough operating conditions

Lower operating Cost

Lower pressure operation, reduced chemical use and longer membrane life

Adimem product line includes full range of state-of-the-art membrane manufacture under ISO 9001 certification

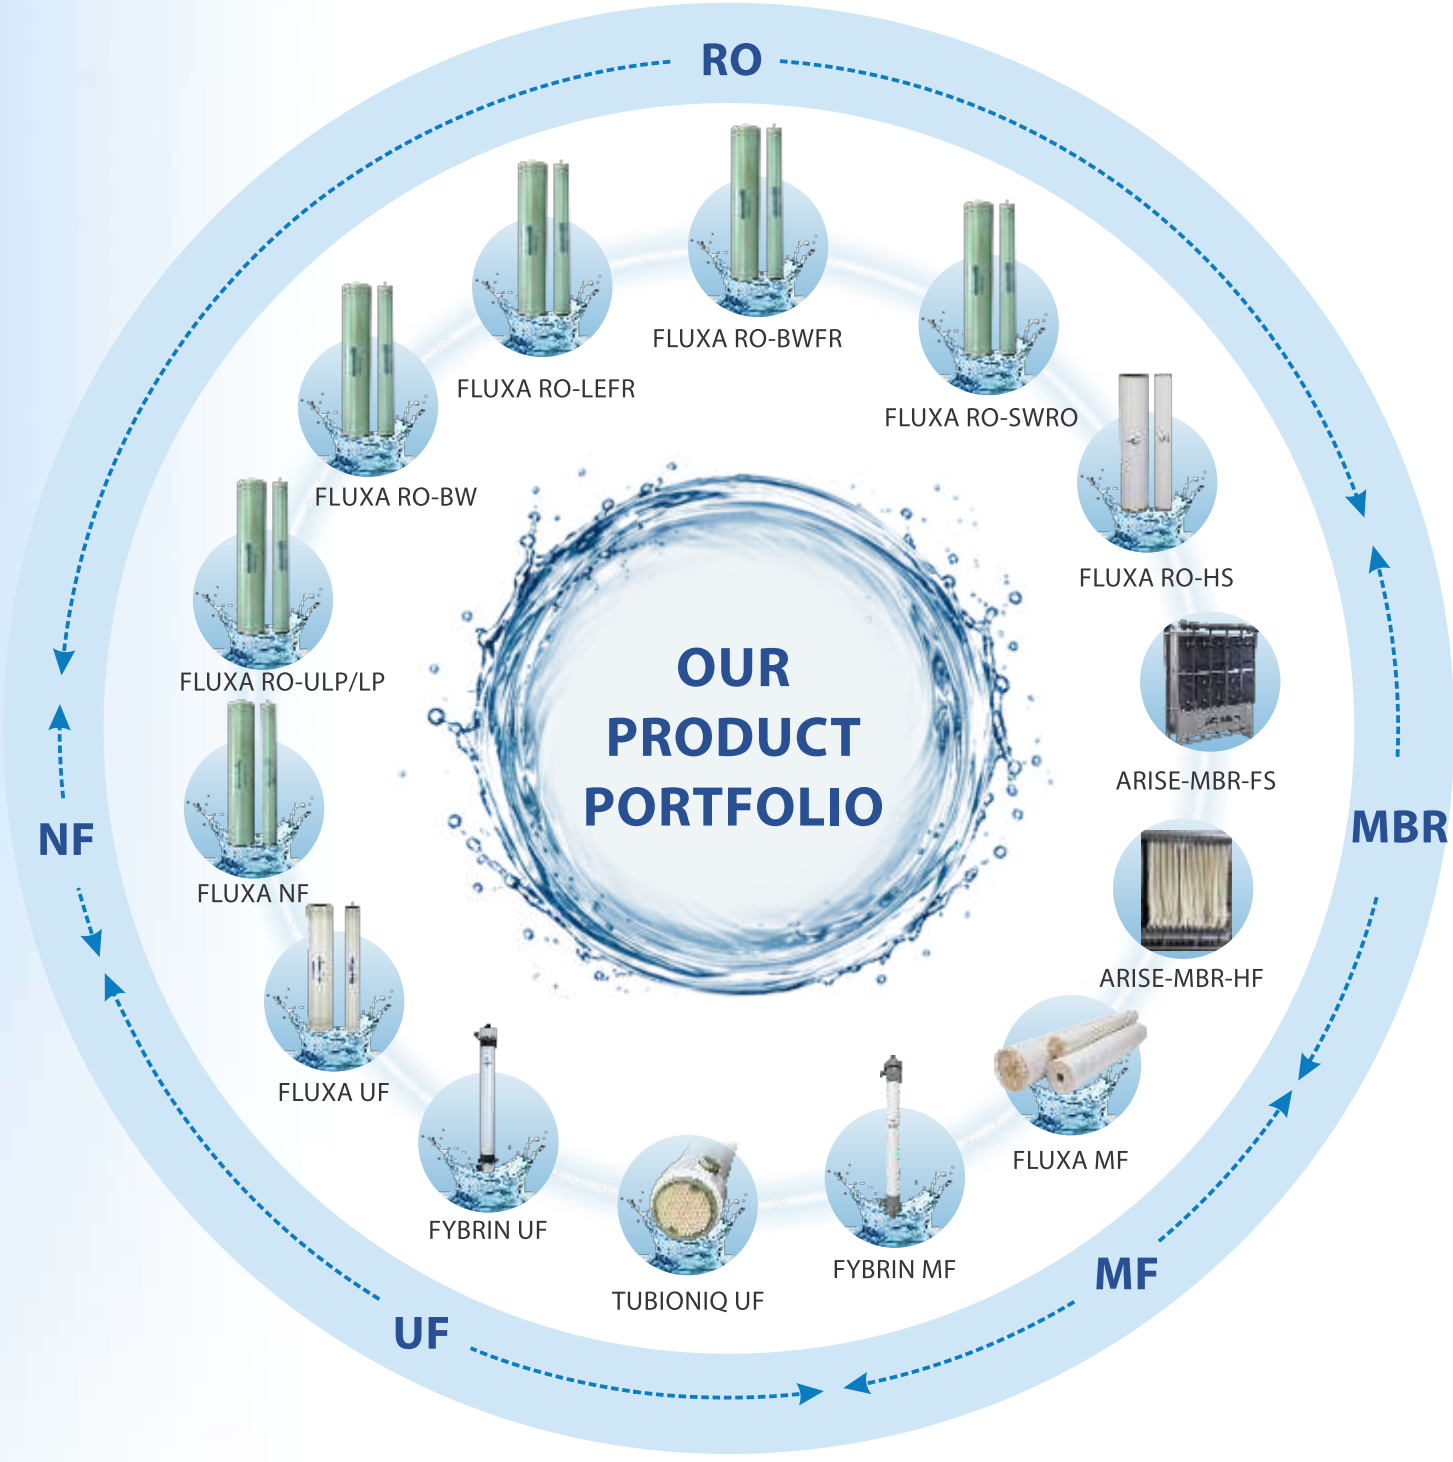

Adimem's FlowSkid™



Microfiltration

FLUXA™ MF series

Model	Material	Pore Size	Size	Outer Wrap
AMT-FLUXA™-MF-PVDF	PVDF	0.1, 0.2 or 0.45 µm	8040/4040	Sanitary / FRP



Applications: Food & Beverage Processing, Dairy Industries, Biotechnology & Pharmaceuticals

FYBRIN ™ MF series

Model	Material	Flow Direction	Pore Size	Membrane Area
AMT-FYBRIN™-MF-PVDF	PVDF	Out-to-In	0.10 µm	50m^2



Applications: Industrial Wastewater Treatment, Municipal Water Treatment, Seawater Pretreatment

Ultrafiltration

FLUXA™ UF Series

Model	Material	MWCO	Size	Outer Wrap
AMT-FLUXA™-UF-PVDF	PVDF	100 kDa, 300 kDa	8040/4040	Sanitary / FRP
AMT-FLUXA™-UF-PES	PES	2, 4, 6, 10, 20, 65kDa	8040/4040	Sanitary / FRP



Applications: Diary Clarification, Protein Concentration, Biotech & Pharmaceutical Separations

FYBRIN™ UF Series

Model	Material	Flow Direction	Pore Size	Membrane Area
AMT-FYBRIN™-UF-PVDF-003	PVDF	Out-to-In	0.03 µm	52 m^2/ 77 m^2
AMT-FYBRIN™-UF-PES-002	PES	In-to-Out	0.02 µm	50 m^2



Applications: Ro Pretreatment, Food & Beverage Process Water, Pharma Process Water

TUBIONIQ™ UF Series

Model	Material	Pore Size	Module Size
TUBIONIQ™-UF-PVDF-003	PVDF	0.03 µm	8",10"



Applications: Oil-water Separation, Chemical Wastewater Treatment, Paint Recovery, High-solid & Viscous Filtration

Reverse Osmosis

FLUXA™ RO Series

FLUXA™ RO CORE

Dependable Performance → Exceptional Value

Designed for customers seeking dependable membrane performance with an excellent balance of quality, consistency and value.

FLUXA™ RO CORE delivers reliable operation through a standardized product platform for everyday industrial and municipal water treatment applications

FLUXA™ RO PRO

Premium Performance → Maximum Confidence

Designed for customers who demand the highest levels of membrane performance, operational confidence and advanced membrane technologies.

FLUXA™ RO PRO is engineered to maximize long-term system performance and process reliability

When Performance Matters Most

Choose **FLUXA™ RO PRO** when your objective is to achieve:

- Specialized membrane technologies
- Enhanced operational confidence
- Optimized long-term performance
- Premium engineering & technical support
- Designed for customers where reliability matters most



Product	Model	Permeate Flow (GPD)	Nominal Salt Rejection	Feed TDS
FLUXA™ CORE SERIES	AMT-FLUXA™ RO-ULP-8040	12,000	99.0%	Upto 1500 ppm
	AMT-FLUXA™ RO-ULP-4040	2,400	99.0%	
	AMT-FLUXA™ RO-LP-8040	12,500	99.3%	Upto 3000 ppm
	AMT-FLUXA™ RO-LP-4040	2,400	99.3%	
	AMT-FLUXA™ RO-BW-8040	11,000	99.6%	Upto 10000 ppm
	AMT-FLUXA™ RO-BW-4040	2,200	99.6%	
FLUXA™ PRO SERIES	AMT-FLUXA™ RO-LEFR-8040	11,000	99.5%	Upto 4000 ppm
	AMT-FLUXA™ RO-LEFR-4040	2,100	99.5%	
	AMT-FLUXA™ RO-BWFR-8040	10,500	99.7%	Upto 15000 ppm
	AMT-FLUXA™ RO-BWFR-4040	2,100	99.7%	
	AMT-FLUXA™ RO-SW-8040-XLE	7,500	99.8%	Upto 50000 ppm
	AMT-FLUXA™ RO-SW-8040-HR	6,000	99.85%	
HEAT SANITISABLE SERIES	AMT-FLUXATM-RO-HS-8040	11,000	99.6%	Temperature Resistance upto 85° C
	AMT-FLUXATM-RO-HS-4040	2,200	99.6%	

Applications: Drinking Water Treatment, Semiconductor Process Water, Desalination Plant

Nanofiltration



FLUXA™ NF Series

Model	Nacl Rejection	MgSO4 Rejection	Size	Outer Wrap
AMT-FLUXA™-NF-30	30-50%	96%	8040/4040	Sanitary / FRP
AMT-FLUXA™-NF-60	50-70%	96%	8040/4040	Sanitary / FRP
AMT-FLUXA™-NF-90	>85%	98%	8040/4040	Sanitary / FRP

Applications: Water Softening, Pre-treatment For Ro, Dye Concentration & Recovery, Sugar And Lactose Concentration

Adimem's FlowSkid™

Membranes + Engineering → Reliable Performance

ADIMEM goes beyond membrane supply. Our application engineering team provides detailed RO & NF membrane projections and design support, helping optimize membrane selection, recovery, flux, staging, operating pressure and overall membrane performance.

For applications requiring an engineered membrane package, FlowSkid™ combines ADIMEM's in-house manufactured membranes with application-specific engineering, hydraulics, instrumentation and controls in a compact, ready-to-integrate platform - suitable for standalone applications or integration into larger water and wastewater treatment systems.



Application Engineering

- Detailed RO & NF membrane projections
- Membrane selection, array & staging optimization
- Recovery, flux, pressure & energy optimization
- Scaling and concentrate analysis
- Application-specific hydraulic design

FlowSkid™ Platform

Modular Construction | ADIMEM Membranes | Pumps & Dosing | Instrumentation | PLC/HMI Controls CIP/Backwash

Applications:

- RO/NF/UF Systems
- Process Water
- Industrial Water Reuse ETP Polishing
- High-recovery RO
- Specialized Separations
- Pilot Systems

Membrane Bioreactor

ARISE™ MBR Hollow Fiber Membrane

Model	Pore Size	Configuration	Membrane Area
AMT-ARISE™-MBR-HF010	0.1 µm	Reinforced Hollow Fibre Module	15 m^2, 20 m^2, 40 m^2
AMT-ARISE™-MBR-HF030	0.03 µm	Reinforced Hollow Fibre Module	15 m^2, 20 m^2, 40 m^2



Key Features :

- Low energy pulse aeration
- High mechanical durability
- Hydrophilic modification – Low fouling
- Long operational life

ARISE™ MBR Flat Sheet Membrane

Model	Pore Size	Configuration
AMT-ARISE™-MBR-FS010	0.1 µm	Submerged Flat Sheet
AMT-ARISE™-MBR-FS030	0.03 µm	Submerged Flat Sheet



Key Features :

- Easy maintenance and modular scalability
- Robust flat sheet for load variability
- Hydrophilic modification to enhance fouling resistance
- Back washable

Applications:

- Small communities & housing clusters Sewage treatment
- Military camps, Recycling greywater and blackwater for toilet flushing and cooling towers
- Landfill leachates treatment

ARISEBox™

Packaged STP → Powered by ADIMEM ARISE™ MBR Technology

ARISEBox™ is ADIMEM's compact, modular sewage treatment platform built around our in-house manufactured ARISE™ MBR membranes.

Combining biological treatment with advanced membrane filtration, ARISEBox™ delivers consistently high-quality treated water suitable for reuse, while reducing plant footprint and eliminating the need for a conventional secondary clarifier.

Designed as a standardized, modular MBR platform, ARISEBox™ can be deployed as a standalone packaged STP or integrated by OEM and EPC partners into larger wastewater treatment solutions.



Key Features :

- **In-house ARISE™ MBR Membranes** Hollow Fiber & Flat Sheet technologies
- **Compact & Modular Design** Above-ground, underground & containerized configurations
- **High-Quality Reuse Water** Consistent treated-water quality for reuse applications
- **Reduced Footprint** No conventional secondary clarifier required
- **Quick Deployment** Factory-engineered for simplified installation & commissioning
- **Automated Operation** PLC-based controls with automatic backwash & CEB
- **Flexible Integration** Standalone deployment or integration into OEM/EPC solutions

Applications:

• Residential & Commercial Developments • Hotels & Institutions • Industrial Facilities • Decentralized Sewage Treatment • Water Reuse Applications










Our
Manufacturing Unit

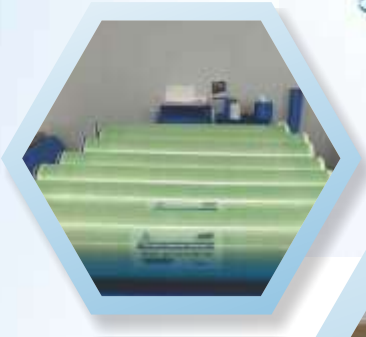





Engineered.
Installed.
Proven.

ADIMEM
PURITY REDEFINED

Membrane solutions delivering performance across industries and geographies.

100+
Membrane Installations
Across India & International Markets

PAN-INDIA PRESENCE



GLOBAL FOOTPRINT



FLAGSHIP INSTALLATIONS

OMAN
SEAWATER DESALINATION
2,000 m^3/day
FLUXA™ RO
High-rejection seawater RO for reliable fresh water production.



RIYADH
SAUDI ARABIA
900 m^3/day
FYBRIN™ UF
FLUXA™ RO
Food Processing
Process Water



AHMEDABAD
INDIA
800 m^3/day
FYBRIN™ UF
FLUXA™ RO
Textile
Water Reuse



MUMBAI
INDIA
800 m^3/day
ARISE™ MBR
Hospitality
STP Water Reuse



KANDLA
INDIA
450 m^3/day
FLUXA™ MF
Edible Oil
Wastewater Pretreatment



SURAT
INDIA
250 m^3/day
FLUXA™ NF
Textile
Dyehouse Water Recovery





Where Adimem™ Fits



Municipal Water Treatment




Industrial Process



Food & Beverages Industry



Power Generation

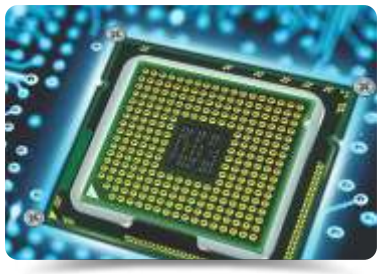

Semiconductors & Microelectronics



Pharmaceutical & Healthcare

What set's us apart

Proprietary Technology

Proprietary RPT Technology, developed in-house for advanced membrane manufacturing

Research & Development

Dedicated in-house research and development focused on advancing membrane technology, performance, and innovation

Quality Assurance

Product-focused quality control ensures efficacy, consistent performance, and long-term reliability

Customer Support

Dedicated customer support providing prompt technical assistance, application guidance, and reliable after-sales service

MAKE IN INDIA

ADIMEM
PURITY REDEFINED
(A Division of Vipul Organics Limited)

VIPULORGANICS
Interconnected Chemistry

Head Office: B Wing, 6th Floor, Office No. 603A, Kaledonia Building, Sahar Road, Andheri (East), Mumbai - 400069, Maharashtra.

R&D Centre: 102, Andheri Industrial Estate, Off Veera Desai Road, Andheri (West), Mumbai - 400053, Maharashtra.

Factory: Plot No. C-76, Saykha Industrial Estate, Saykha, Tal: Vagra, Dist: Bharuch - 392140, Gujarat.

+91 91366 32872, +91 22 6613 9999, +91 22 4825 6018 info@adimem.com www.adimem.com