
直流无刷电机规格书
BRUSHLESS DC MOTOR SPECIFICATION

版本 REV.	位置 LOC.	变更号 ECN NO.	变 更 内 容 REVISION RECORD	日期 DATE	设计 BY

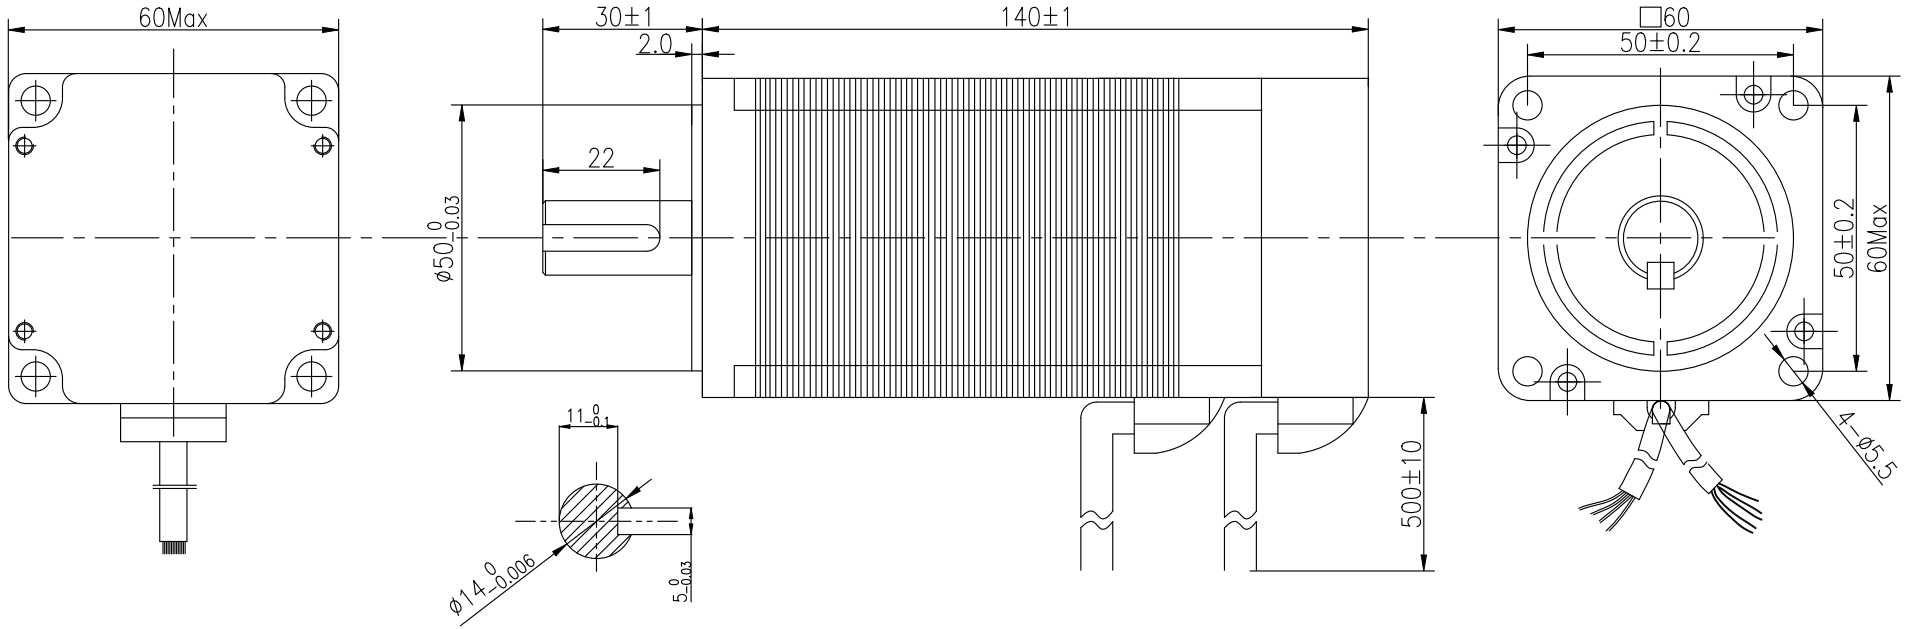

电机 MOTOR WIRING			霍尔线 HALL WIRING				
U	V	W	+5V	A	B	C	GND
黄 YEL	绿 GRN	蓝 BLE	红 RED	黄 YEL	绿 GRN	蓝 BLE	黑 BLK
3*1mm²			5*26AWG-0.2mm²				

电机参数表/Specifications		
额定电压/Rated voltage	48	DC
额定输出功率/Rated power	400	W
转子磁极数/Number of Poles	8	
电机相数/Number of phase	3	
额定转速/Rated speed	3000	RPM
最高转速/Maximum speed	4000±10%	RPM
额定转矩/Rated torque	1.27	N.m
额定电流/Rated current	11.5	A
反电势系数/Back EMF	8.4±10%	V/KRPM
转动惯量/Rotor inertia	96	kg.mm²
电机重量/Motor weight	2.05	Kg
绝缘等级/Insulation class	B	130° c
防护等级/Protective enclosure rating	IP54	

CTQ Sign: Customer; Process; Law

物料符合RoHS指令要求 All Material are to be RoHS Compliant

UNLESS OTHERWISE SPECIFICED

单位 Unit:mm
1.未注线性公差参照 GB/T1804-m级 ISO 2768-1 class m

<=6	±0.1
>6~30	±0.2
>30~120	±0.3
>120~400	±0.5

2.常规公差Torlerances：
角度 Angles:±0.1°
倒角Chamfer:±5°

CHANGZHOU HOLRY ELECTRIC TECHNOLOGY CO.,LTD.

名称 NAMES	签名 SIGNATURE	日期 DATE
设计 DESIGN		
标准化 STANDARD		
工艺 TECHNOLOGY		
审核 CHECK		
批准 APPROVE		

第一角画法 FIRST ANGLE METHOD

客户型号 CUSTOMER`S MODEL.NO.

版本 REV.

变更标识 ECN SIGN

名称 TITLE	BRUSHLESS MOTOR
型号 MODEL	60BLDC140-44030-14J
图号 DWG.NO.	
日期 DATE	2025.05.02
材料 MATERIAL	

图幅 SIZE	版本 REV.	页 SHEET	比例 SCALE