

Make-up Float Valve, 3/4 in NPT - Robert Mfg BOB R400 (brass)

Model	Robert Manufacturing BOB R400 series float valve
Connection	3/4 in NPT
Body	Brass; float-actuated make-up water valve
Type	High-capacity/high-pressure float valve
Application	Balancing tank automatic make-up water

R400 Series BOB® Float Valves


For use in many agricultural and industrial applications to regulate water levels

High-capacity valves, stems and floats rated for a variety of inlet pressures, GPM flow rates, temperatures and types of liquids.

Adjustable short arm for regulating water level.

Corrosion resistant forged brass design with male NPT inlet and outlet connections, and standard nitrile seals or optional FKM seals.

Lead-Free product offerings available.

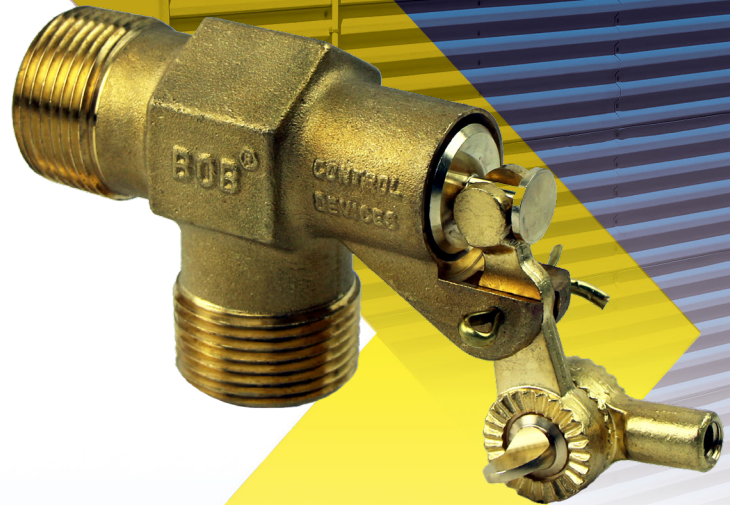

Technical Information

R400 Valve Only – NPT x NPT

Part Number	Pipe Size (in)		Free Discharge Flow Capacity			Weight (lbs)
	Inlet	Outlet	35 PSI	65 PSI	85 PSI	
R400-3/8	3/8 NPT	3/8 NPT	9 GPM	11.5 GPM	13 GPM	0.44
R400-1/2	1/2 NPT	1/2 NPT	12 GPM	18 GPM	22 GPM	0.63
R400-3/4	3/4 NPT	3/4 NPT	21 GPM	32.5 GPM	39.9 GPM	0.82
R400-1	1 NPT	1 NPT	43.5 GPM	61 GPM	68.5 GPM	1.13

R400 Valve Assembly with Brass Stem & Copper Float – NPT x NPT

Part Number	Pipe Size (in)		Free Discharge Flow Capacity			Weight (lbs)
	Inlet	Outlet	Float Ball	Stem (in)	Max Inlet Pressure	
R400-3/8-5	3/8 NPT	3/8 NPT	R440-5	1/4-20 x 10	125 PSI	1.13
R400-1/2-5	1/2 NPT	1/2 NPT	R440-5	1/4-20 x 10	125 PSI	1.31
R400-3/4-5	3/4 NPT	3/4 NPT	R440-5	1/4-20 x 10	100 PSI	1.50
R400-1-5	1 NPT	1 NPT	R440-6	1/4-20 x 10	100 PSI	1.94

R400 Lead-Free Brass Float Valve

Part Number	Pipe Size (in)		Free Discharge Flow Capacity			Weight (lbs)
	Inlet	Outlet	35 PSI	65 PSI	85 PSI	
R400-3/8-LF	3/8 NPT	3/8 NPT	9 GPM	11.5 GPM	13 GPM	0.44
R400-1/2-LF	1/2 NPT	1/2 NPT	12 GPM	18 GPM	22 GPM	0.63
R400-3/4-LF	3/4 NPT	3/4 NPT	21 GPM	32.5 GPM	39.9 GPM	0.82
R400-1-LF	1 NPT	1 NPT	43.5 GPM	61 GPM	68.5 GPM	1.13

R400 Lead-Free Brass Float Valve w/ Stainless Steel Stem & Polyethylene Float

Part Number	Pipe Size (in)		Free Discharge Flow Capacity			Weight (lbs)
	Inlet	Outlet	Float Ball	Stem (in)	Max Inlet Pressure	
R400-3/8-5P-LF	3/8 MIP	3/8 MIP	PF5	1/4-20 x 10	125 PSI	0.73
R400-1/2-5P-LF	1/2 MIP	1/2 MIP	PF5	1/4-20 x 10	125 PSI	0.91
R400-3/4-5P-LF	3/4 MIP	3/4 MIP	PF5	1/4-20 x 10	100 PSI	1.1
R400-1-5P-LF	1 MIP	1 MIP	PF6	1/4-20 x 10	100 PSI	1.5

