


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

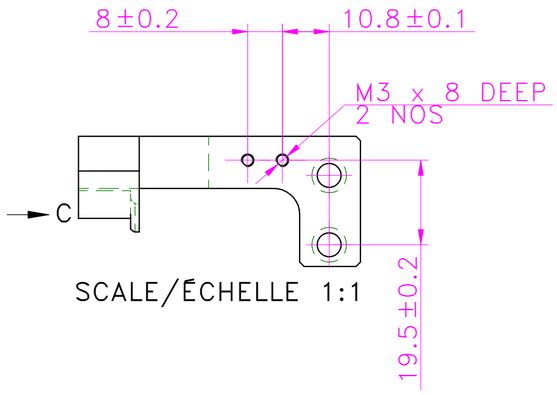


SCALE/ÉCHELLE 1:1

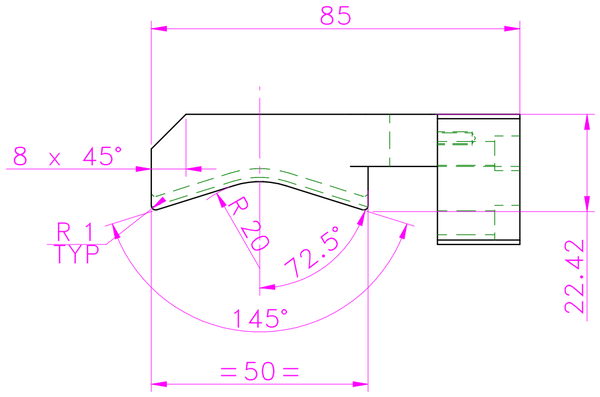


SCALE/ÉCHELLE 1:1

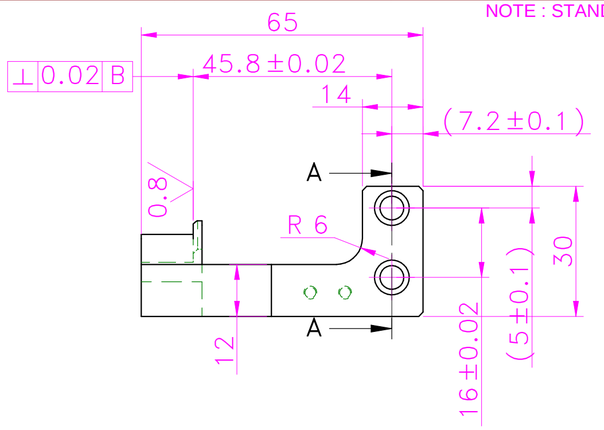


SCALE/ÉCHELLE 1:1

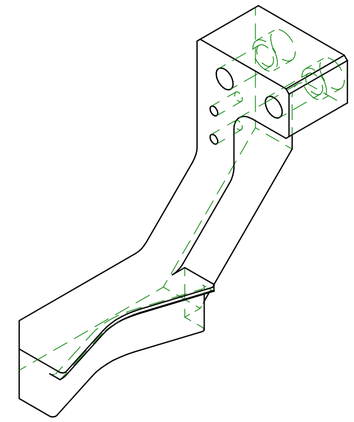


SCALE/ÉCHELLE 1:1

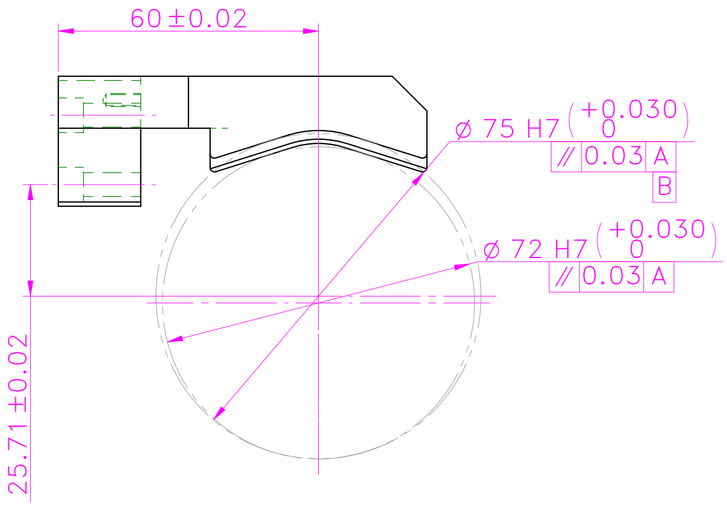


VIEW C
SCALE/ÉCHELLE 1:1

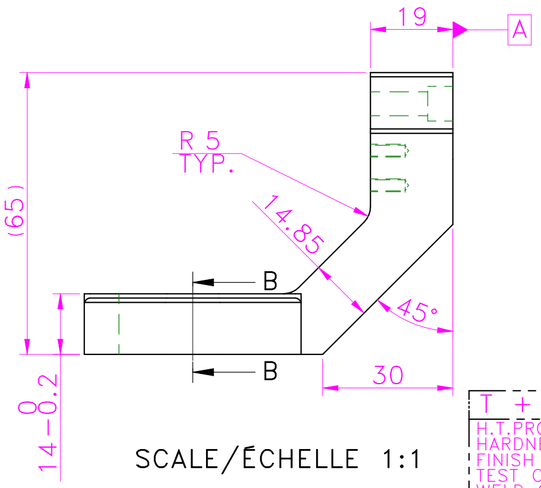

SCALE/ÉCHELLE 1:1



SECTION B–B
SCALE/ÉCHELLE 1:1

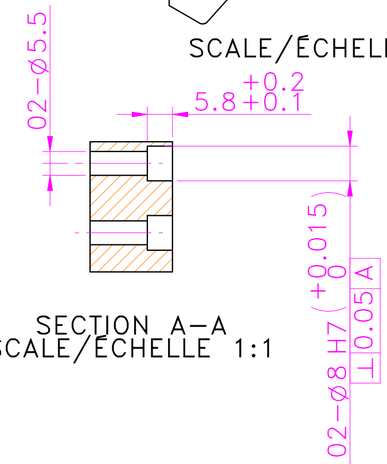

SECTION A–A
SCALE/ÉCHELLE 1:1

T + S NOTE :	
H.T.PROCESS	: REFER NOTE
HARDNESS & DEPTH	: REFER NOTE
FINISH & DEPTH	: REFER NOTE
TEST COUPON SIE	: 30 x 14 (20mmLENGTH – 01NOS)
WELD CLASS	: B IF APPLICABLE

MTC REPORT REQURIED
NON DESTRUCTIVE TESTING (IF APPLICABLE)

RAW MATERIAL	HEAT TREATMENT	FINISH COMPOMENT
UT	DP+UT	MPI

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

1 HEAT TREATMENT :–(English)
1) TO BE TOUGHENED UPTO 28–32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

TRAITEMENT DE CHALEUR :–(French)
1) A RENFORCER JUSQUDA 28–32 HRC.
2) RE–TARAUDAGE A FAIRE APRES TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (SDIL Y A LIEU)

NOTE : (English)
MATERIAL: C45 1
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 0.22 kg

NOTE :–(French)
MATÉRIEL : C45
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (0.8)
POIDS (Kg): 0.22 kg

CNC MACHINING NOTE :– (English)
1) TO BE MACHINED BY 3D CAD DATA.

NOTE POUR MACHINES CNC :– (French)
1) A USINER A PARTIR DES DONNEES CAD 3D.

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

REVISION	DESCRIPTION	DATE	DRN.BY
1	NOTE CHANGED	30.05.2024	03007272

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm.
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: FINGER2
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
14.90 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. | PART CLASS. T+S | HEAT TREATMENT

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03007292	03004785	03002882	#	P23Y5B072024	01	1:1
30/05/2024	30/05/2024	30/05/2024	NET WEIGHT-Kg 0.22 kg			SHEET 1 OF 1

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B072024.dft