
NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

FRONT VIEW HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.2	0.00	40.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.3	0.00	80.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.4	0.00	120.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.5	0.00	160.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.6	0.00	200.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.7	0.00	240.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.8	341.00	0.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.9	341.00	40.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.10	341.00	80.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.11	341.00	120.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.12	341.00	160.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.13	341.00	200.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
A.14	341.00	240.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	
B.1	148.50	120.00	Ø 10.00 mm THRU' C'BORE Ø 16.00 mm – 8.00 mm DEEP	
B.2	268.50	120.00	Ø 10.00 mm THRU' C'BORE Ø 16.00 mm – 8.00 mm DEEP	
B.3	108.50	60.00	Ø 10.00 mm THRU'	
B.4	208.50	60.00	Ø 10.00 mm THRU'	
B.5	308.50	60.00	Ø 10.00 mm THRU'	
B.6	108.50	180.00	Ø 10.00 mm THRU'	
B.7	208.50	180.00	Ø 10.00 mm THRU'	
⚠1 B.8	308.50	180.00	Ø 10.00 mm THRU'	


TOP VIEW HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm x 12.00 mm DEEP	H7
B.1	48.00	0.00	M6 x 14.00 mm DEEP	
B.2	140.50	0.00	M6 x 14.00 mm DEEP	
B.3	−44.50	0.00	M6 x 14.00 mm DEEP	
B.4	−137.00	0.00	M6 x 14.00 mm DEEP	
B.5	−229.50	0.00	M6 x 14.00 mm DEEP	

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.


NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.




TOP VIEW
SCALE/ÉCHELLE 1:2

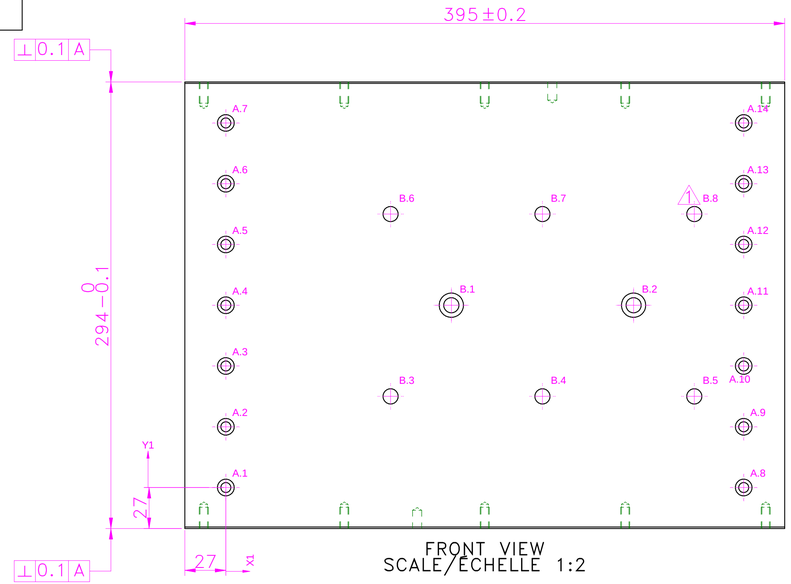

FRONT VIEW
SCALE/ÉCHELLE 1:2

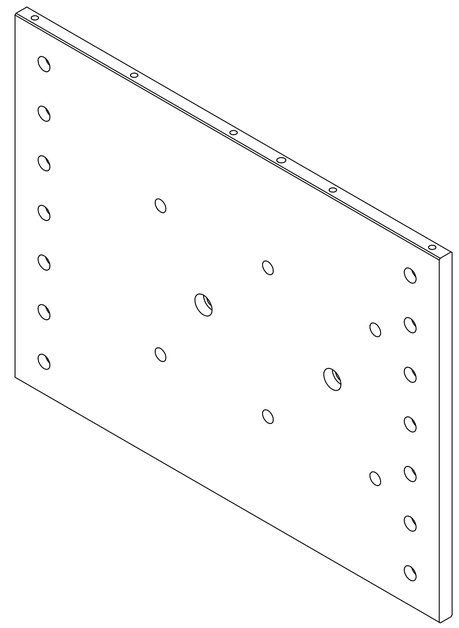

SCALE/ÉCHELLE 1:2

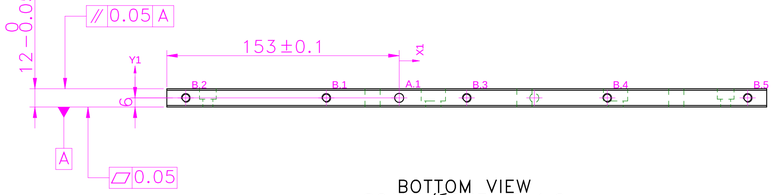

BOTTOM VIEW
SCALE/ÉCHELLE 1:2

BOTTOM VIEWHOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm x 12.00 mm DEEP	H7
B.1	−48.00	0.00	M6 x 14.00 mm DEEP	
B.2	−140.50	0.00	M6 x 14.00 mm DEEP	
B.3	44.50	0.00	M6 x 14.00 mm DEEP	
B.4	137.00	0.00	M6 x 14.00 mm DEEP	
B.5	229.50	0.00	M6 x 14.00 mm DEEP	

TOLERANCE NOTE :− (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/− 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN +/− 0.1

NOTE DE TOLERANCE :− (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/− 0.02 / IT7
2) TOUT TROU ET CONTRE−ALESAGE C.D, DOIT ÊTRE CONTROLÉ SOUS +/− 0.1

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

NOTE:
1)USE HELICOIL INSERT AT ALL TAPPING HOLES

NOTE : (English)
MATERIAL: Aluminum, 7075−T6
FINISH: SELF−ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 3.82 kg

NOTE :−(French)
MATÉRIEL : Aluminum, 7075−T6
FINITION : SELF−ANODIZING
MACHINES : 3.2
POIDS (Kg): 3.82 kg

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII	UNSP CHF
0.5 R	0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
⚠1	HOLE ADDED	25/11/24	03004476

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: SLIDE BRACKET PLATE 1

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
397.94 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	---	PART CLASS.	B	HEAT TREATMENT	---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03004476	03004785	03004785	#	P23Y5B076037	01	1 : 1
25/11/2024	25/11/2024	25/11/2024	NET WEIGHT-Kg 3.82 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\EJECAM Uploading\2022-23\P23Y5\VP23Y5B076037.dft