

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.


NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

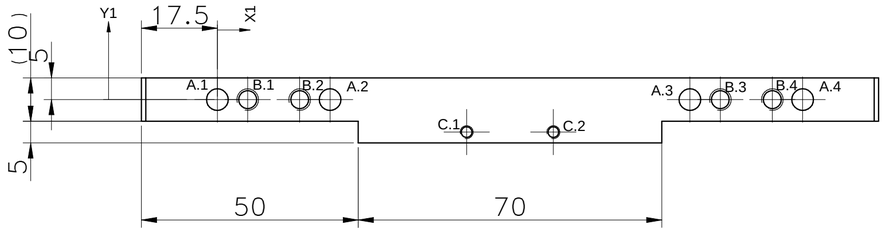


TOP VIEW
SCALE/ÉCHELLE 1:1

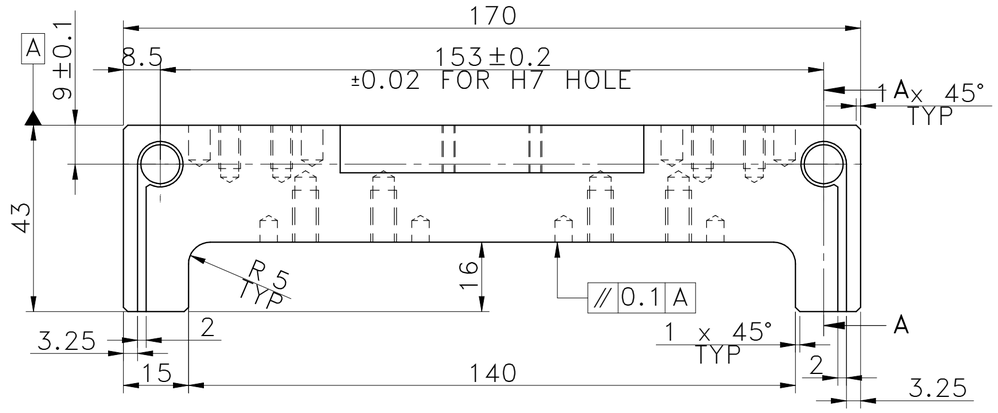


SCALE/ÉCHELLE 1:1

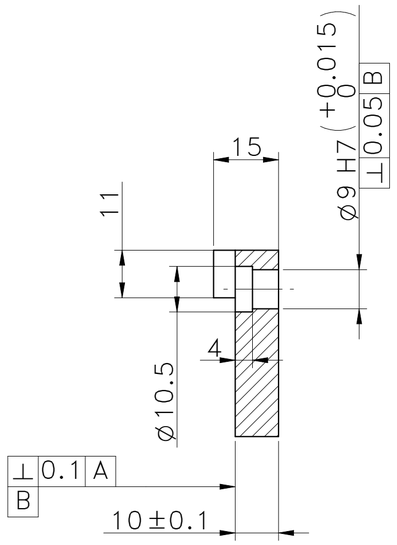

SECTION A-A
SCALE/ÉCHELLE 1:1

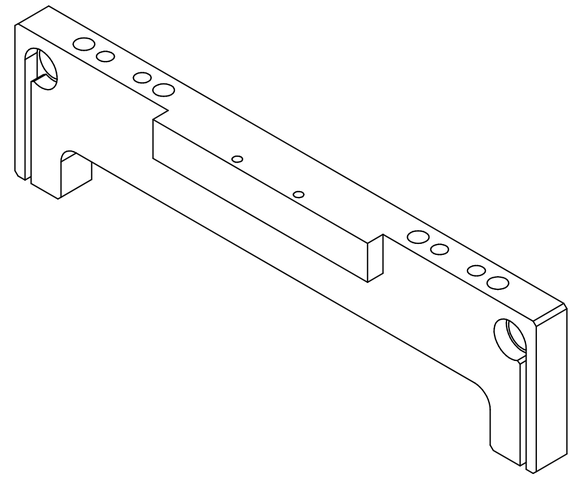

SCALE/ÉCHELLE 1:1

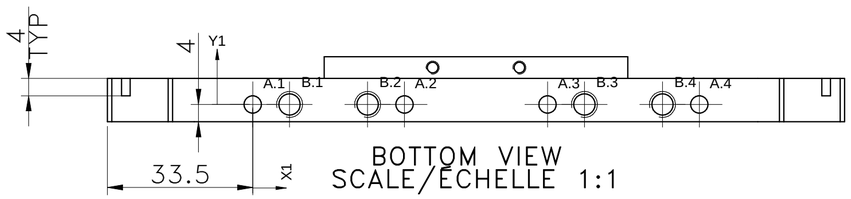

BOTTOM VIEW
SCALE/ÉCHELLE 1:1

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 0.39 kg

NOTE :-(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 0.39 kg

RESERVED SPACE FOR
CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **BRACKET 1**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
29.08 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03004476	03004785	03004785	#	P23Y5B076040	00	1 : 1
09/11/2024	09/11/2024	09/11/2024	NET WEIGHT-Kg 0.39 kg			SHEET 1 OF 2

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B076040.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

TOP VIEW HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 5.00 mm x 8.00 mm DEEP	H7
A.2	26.00	0.00	Ø 5.00 mm x 8.00 mm DEEP	H7
A.3	109.00	0.00	Ø 5.00 mm x 8.00 mm DEEP	H7
A.4	135.00	0.00	Ø 5.00 mm x 8.00 mm DEEP	H7
B.1	7.00	0.00	M5 x 10.00 mm DEEP	
B.2	19.00	0.00	M5 x 10.00 mm DEEP	
B.3	116.00	0.00	M5 x 10.00 mm DEEP	
B.4	128.00	0.00	M5 x 10.00 mm DEEP	
C.1	57.50	−7.50	M3 THRU'	
C.2	77.50	−7.50	M3 THRU'	

BOTTOM VIEW HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 4.00 mm x 5.00 mm DEEP	H7
A.2	35.00	0.00	Ø 4.00 mm x 5.00 mm DEEP	H7
A.3	68.00	0.00	Ø 4.00 mm x 5.00 mm DEEP	H7
A.4	103.00	0.00	Ø 4.00 mm x 5.00 mm DEEP	H7
B.1	8.50	0.00	M6 x 12.00 mm DEEP	
B.2	26.50	0.00	M6 x 12.00 mm DEEP	
B.3	76.50	0.00	M6 x 12.00 mm DEEP	
B.4	94.50	0.00	M6 x 12.00 mm DEEP	

TOLERANCE NOTE :− (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/− 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/− 0.1

NOTE DE TOLERANCE :− (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/− 0.02 / IT7
2) TOUT TROU ET CONTRE−ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/− 0.1

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 0.39 kg

NOTE :−(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 0.39 kg

RESERVED SPACE FOR STAMP

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **BRACKET 1**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
29.08 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG.	---	PART CLASS.	B	HEAT TREATMENT	---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03004476	03004785	03004785	#
09/11/2024	09/11/2024	09/11/2024	NET WEIGHT-Kg: 0.39 kg

DRG./PART CODE: **P23Y5B076040**

REV.: **00**

SCALE: 1 : 1

SHEET: 2 OF 2

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B076040.dft