


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

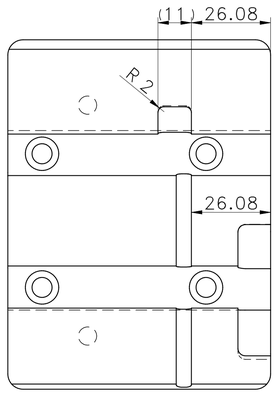


SCALE/ECHELLE 1:1

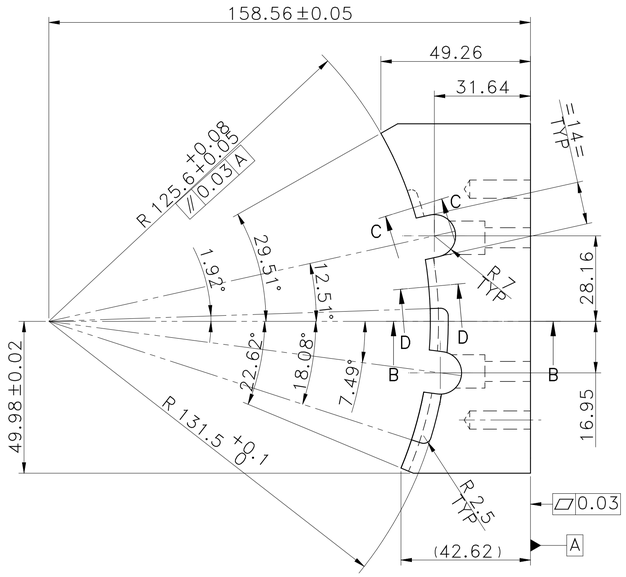


SCALE/ECHELLE 1:1

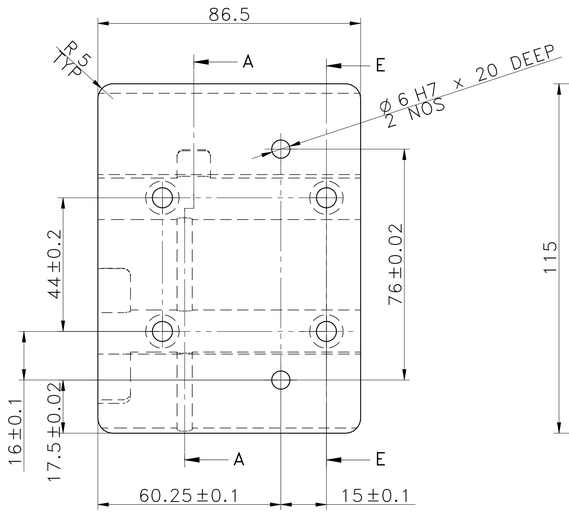


SCALE/ECHELLE 1:1

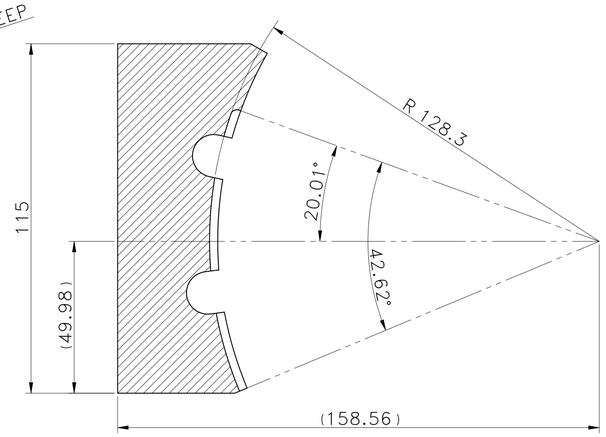


SECTION A–A
SCALE/ECHELLE 1:1

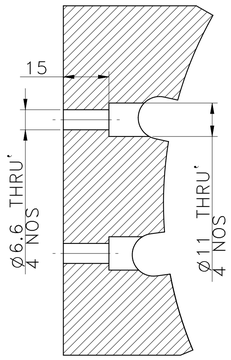


SECTION E–E
SCALE/ECHELLE 1:1




SECTION B–B
SCALE/ECHELLE 1:1




SECTION C–C
SCALE/ECHELLE 1:1



SECTION D–D
SCALE/ECHELLE 2:1

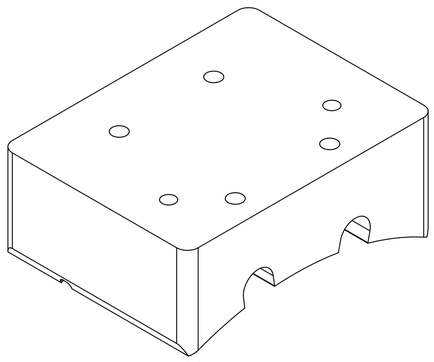

SCALE/ECHELLE 1:1

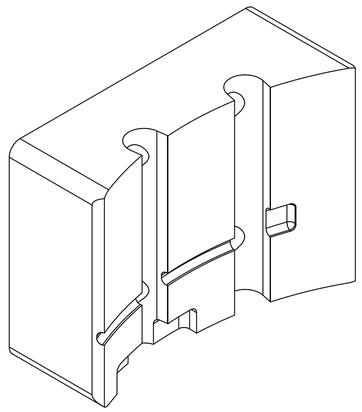

SCALE/ECHELLE 1:1

T + S NOTE :	
H.T.PROCESS	: REF NOTE
HARDNESS & DEPTH	: REF NOTE
FINISH & DEPTH	: REF NOTE
TEST COUPON SIZE	: 115X86.5X49.26mm (20mmLENGTH - 01NOS)
WELD CLASS	: B IF APPLICABLE

MTC REPORT REQURIED
NON DESTRUCTIVE TESTING (IF APPLICABLE)

RAW MATERIAL	HEAT TREATMENT	FINISH COMPOMENT
UT	DP+UT	MPI

HEAT TREATMENT NOTE :–
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 2.66 kg

NOTE :–(French)
MATÉRIEL : 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 2.66 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTRO...

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	T+S PART CLASS ADDED.	27/05/2024	03006751

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: RESTING PAD
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
64.73 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. P2207012121033 | PART CLASS. T+S | HEAT TREATMENT | REF NOTE

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006751	03004785	03002882	#
27/05/2024	27/05/2024	27/05/2024	NET WEIGHT-Kg: 2.66 kg

DRG./PART CODE: P23Y5B153065
REV.: 01
SCALE: 1 : 1
SHEET: 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\sr-n1043\E:\DM Uploading\2022-23\P23Y5\P23Y5B153065.dft