


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

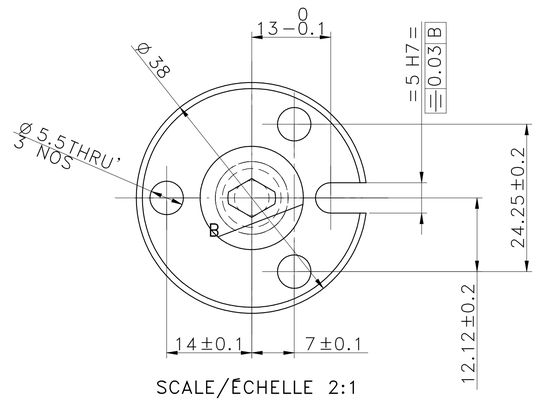


SCALE/ECHELLE 2:1

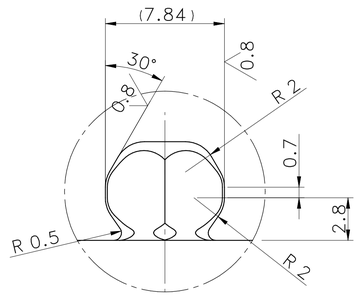


DETAIL A
SCALE/ECHELLE 5:1

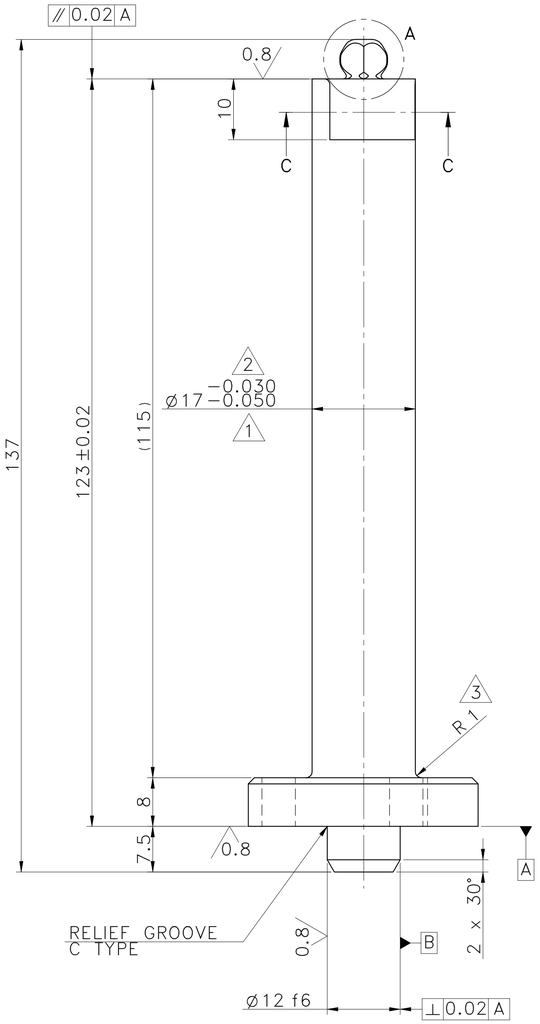


SCALE/ECHELLE 2:1

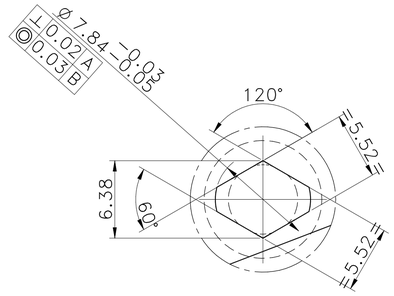

DETAIL B
SCALE/ECHELLE 4:1

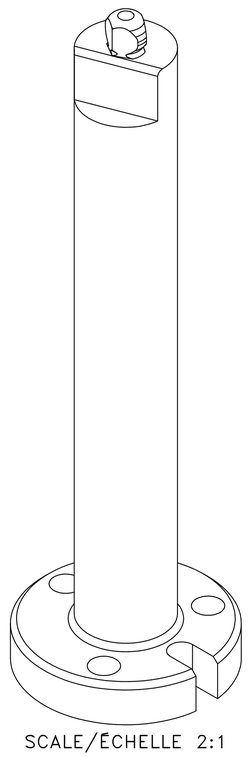

SCALE/ECHELLE 2:1



SECTION C–C
SCALE/ECHELLE 2:1

HEAT TREATMENT NOTE :–
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

T + S NOTE :	
H.T.PROCESS	: XXXXX
HARDNESS & DEPTH	: XXXXX
FINISH & DEPTH	: XXXXX
TEST COUPON SIZE	: XXXXX (20mmLENGTH - 01NOS)
WELD CLASS	: B IF APPLICABLE

MTC REPORT REQURIED
NON DESTRUCTIVE TESTING (IF APPLICABLE)

RAW MATERIAL	HEAT TREATMENT	FINISH COMPOMENT
UT	DP+UT	MPI

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 0.27 kg

NOTE :–(French)
MATÉRIEL : 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (0.8)
POIDS (Kg): 0.27 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : W

RESERVED SPACE FOR STAMP

CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY	
3	REDIUS ADDED	22/11/2024	03006330	
2	MISSING TOLERANCE ADDED (DIA 17 MM)	08.10.2024	7272	
1	MISSING DIAMETER ADDED. (DIA 17mm)	22/03/2024	03006751	

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MFC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm	DESCRIPTION: LOCATE RG					DRAWING TYPE: MACHINING	
2.DO NOT SCALE DRAWING.	SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
3.IF IN DOUBT , ASK TEAM MEMBER	15.36 in^2	#	#	WPES	0300	PL-02	A1
4.LOCATION : PUNE	REFERENCE DWG. P2207012112023	PART CLASS.T+S	HEAT TREATMENT	REF NOTE			
	DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED	03006751	03004785	03002882	#	P23Y5B154313	03	2 : 1
	22/11/2024	22/11/2024	22/11/2024	NET WEIGHT-Kg 0.27 kg			SHEET 1 OF 1

\\srv01043\E-DM Uploading\2022-23\P23Y5\P23Y5B154313.dft