



NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

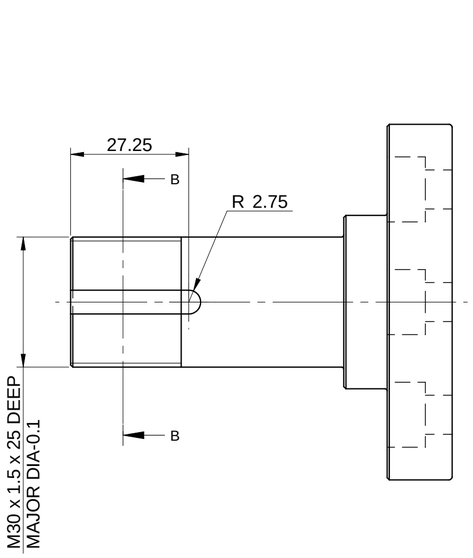

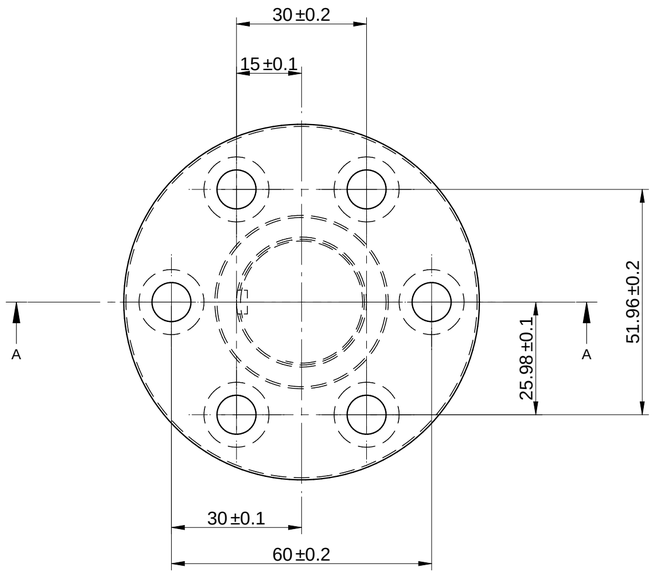




SECTION B-B
SCALE 1:1

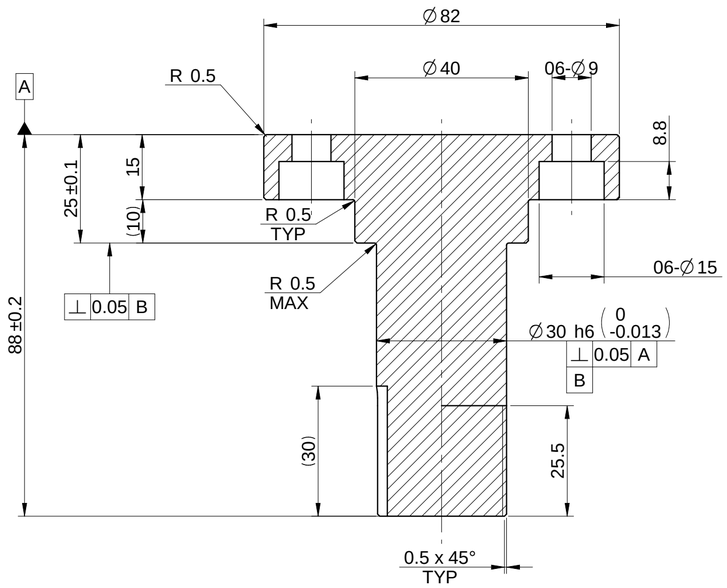

SECTION A-A
SCALE 1:1



NOTE :
MATERIAL : EN24
FINISH : I.Z.B.P. (TRIVALENT)
MACHINING : ▽▽

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 24-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

RESERVED SPACE FOR ...

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: **SHAFT**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
37.59 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. N.A. | PART CLASS. B | HEAT TREATMENT TOUGHNESS 28-32 HRC

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006581	03004785	03002882	#
18/04/2024	18/04/2024	18/04/2024	NET WEIGHT-Kg 0.00 kg

DRG./PART CODE: **P23D2C042261**
REV.: **00**
SCALE: 1 : 2
SHEET: 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\pariengfs\ExDM Uploading\2023-2024\P23D2_Ford _BEV-M Battery Assembly\P23D2C042261.dft