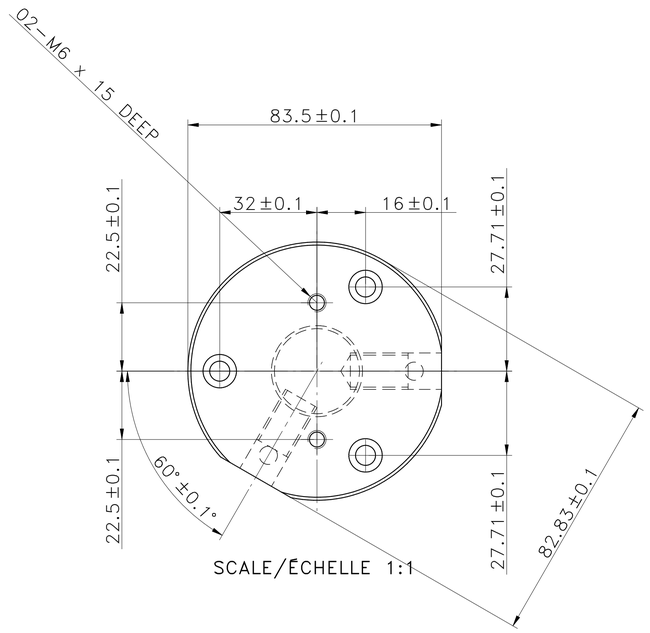
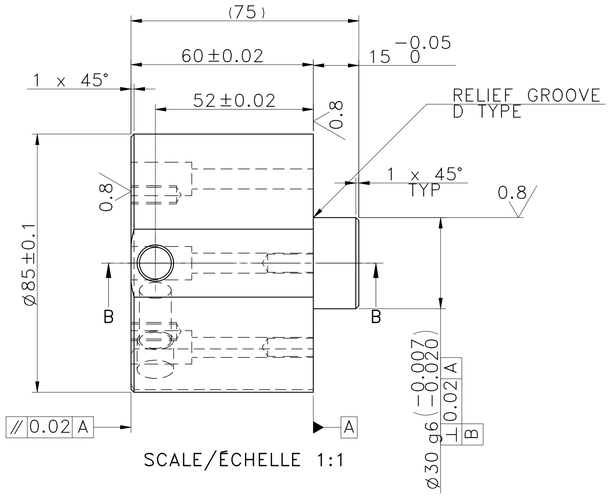
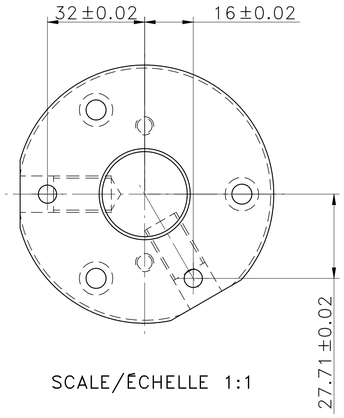
NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00





SCALE/ECHELLE 1:1





SCALE/ECHELLE 1:1



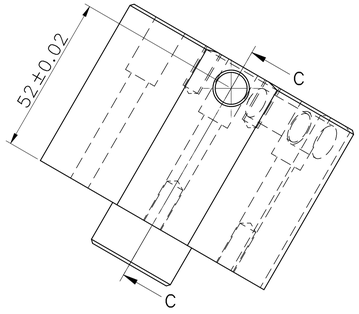

SCALE/ECHELLE 1:1



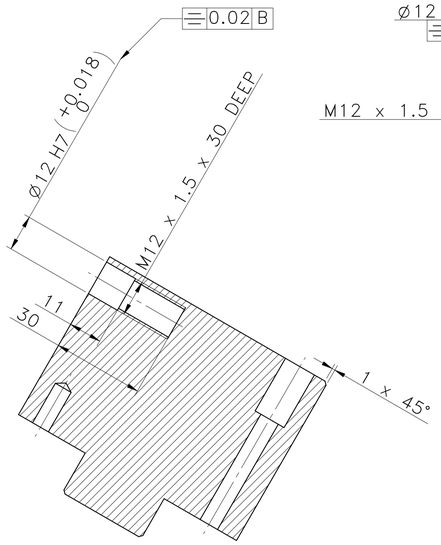
SCALE/ECHELLE 1:1



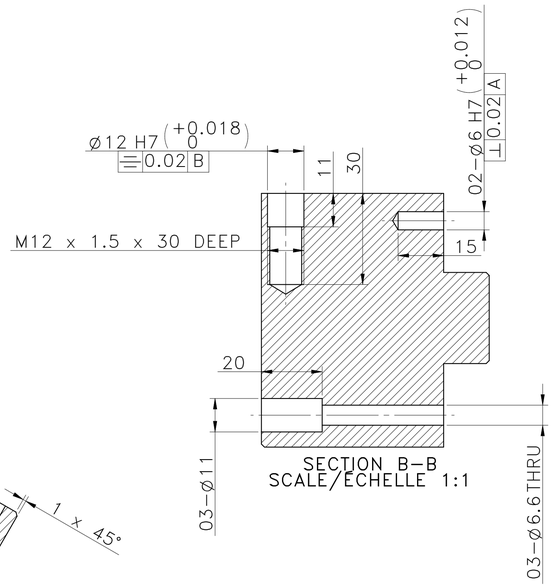
SCALE/ECHELLE 1:1




VIEW A
SCALE/ECHELLE 1:1




SECTION C-C
SCALE/ECHELLE 1:1




SECTION B-B
SCALE/ECHELLE 1:1

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 24-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )

NOTE : (English)
# MATERIAL: C45
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING: 3.2 (0.8)
# WEIGHT(Kg ): 2.57 kg

NOTE :-(French)
# MATÉRIEL : C45
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES : 3.2 (0.8)
# POIDS (Kg): 2.57 kg

RESERVED SPACE FOR CONTROLLED COPY

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP RADII 0.5 R | UNSP CHF 0.5 x 45° |
| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm | |
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |
| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |
| UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm | |
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |
| UNSPECIFIED TOL.(MFG) FOR LINEAR IN mm | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| | | | |

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT, ASK TEAM MEMBER

WIPRO PARI GROUP

DESCRIPTION: **ROLLER MTG**

DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 55.69 in^2 | # | # | WPES | 0300 | PL-02 | A1 |

| REFERENCE DWG. | NA | PART CLASS. B | HEAT TREATMENT | REF-NOTE |
|---|---|---|---|---|

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL |
|---|---|---|---|
| 9265 | 03004785 | 03002882 | # |
| 08/05/2024 | 08/05/2024 | 08/05/2024 | NET WEIGHT-Kg 2.57 kg |

DRG./PART CODE: **P23Y5B071016**

REV.: **00**

SCALE: 1 : 1

SHEET 1 OF 1

CONTROLLED COPY

\\srv01102\Ex-DM Uploading\2022 - 23\P23Y5\P23Y5B071016.dft