


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

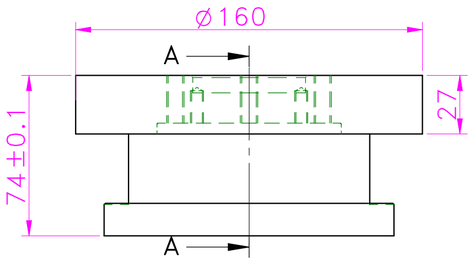


SCALE/ÉCHELLE 1:2

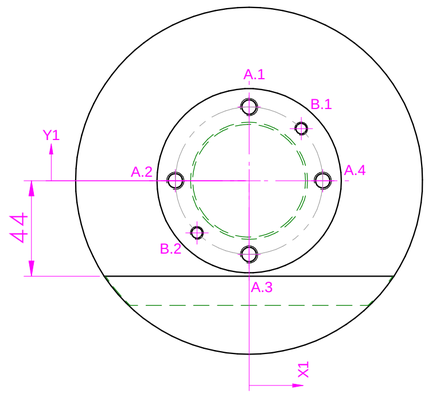

SCALE/ÉCHELLE 1:2

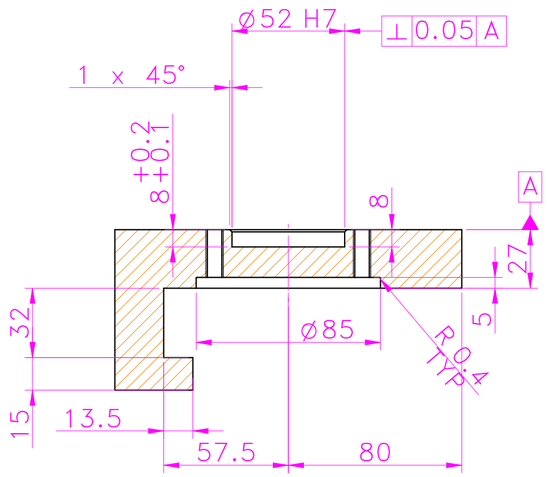

SECTION A–A
SCALE/ÉCHELLE 1:2

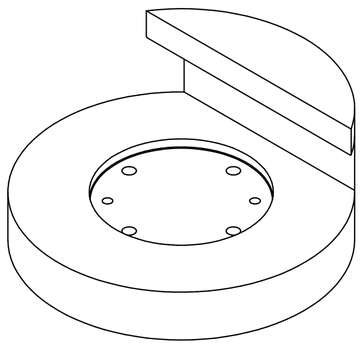

SCALE/ÉCHELLE 1:2

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	34.00	M8 THRU'	
A.2	−34.00	0.00	M8 THRU'	
A.3	0.00	−34.00	M8 THRU'	
A.4	34.00	0.00	M8 THRU'	
B.1	24.04	24.04	M6 x 15.00 mm DEEP	
B.2	−24.04	−24.04	M6 x 15.00 mm DEEP	

⚠1 HEAT TREATMENT :−(English)
1) TO BE TOUGHENED UPTO 28−32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

TRAITEMENT DE CHALEUR :−(French)
1) A RENFORCER JUSQUÀ 28−32 HRC.
2) RE−TARAUDAGE À FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (S'IL Y A LIEU)

TOLERANCE NOTE :− (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/− 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN +/− 0.1

NOTE DE TOLERANCE :− (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/− 0.02 / IT7
2) TOUT TROU ET CONTRE−ALÉSAGE C.D, DOIT ÊTRE CONTROLÉ SOUS +/− 0.1

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English) ⚠1
MATERIAL: C45
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2/ (1.6/)
WEIGHT(Kg): 4.70 kg

NOTE :−(French)
MATÉRIEL : C45
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2/ (1.6/)
POIDS (Kg): 4.70 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROL

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
		-	-
⚠1	NOTE CHANGED	30.05.2024	03007272

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: PRESS FOLLOWER GUIDE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
113.93 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006128	03004785	03002882	#	P23Y5B071051	01	1 : 2
30/05/2024	30/05/2024	30/05/2024	NET WEIGHT-Kg 4.70 kg			SHEET 1 OF 1

\\srv01043\E:DM Uploading\2022-23\P23Y5\P23Y5B071051.dft