
NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00


TOLERANCE NOTE :- (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/- 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/- 0.1

NOTE DE TOLERANCE :- (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/- 0.02 / IT7
2) TOUT TROU ET CONTRE-ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/- 0.1


HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm x 10.00 mm DEEP	H7
A.2	41.00	39.00	Ø 6.00 mm x 10.00 mm DEEP	H7
A.3	56.00	32.00	Ø 6.00 mm THRU'	REF SECTION A-A
A.4	-38.00	32.00	Ø 6.00 mm THRU'	REF SECTION A-A
B.1	9.00	-15.00	Ø 6.60 mm THRU'	
B.2	-31.70	55.50	Ø 6.60 mm THRU'	
B.3	49.70	55.50	Ø 6.60 mm THRU'	
C.1	26.17	2.74	M4 x 10.00 mm DEEP	
C.2	-10.42	6.64	M4 x 10.00 mm DEEP	
C.3	40.67	27.86	M4 x 10.00 mm DEEP	
C.4	-24.92	31.76	M4 x 10.00 mm DEEP	
C.5	-3.25	61.50	M4 x 10.00 mm DEEP	
C.6	25.75	61.50	M4 x 10.00 mm DEEP	
D.1	-18.28	16.25	Ø 9.00 mm THRU'	REF SECTION C-C
D.2	36.28	16.25	Ø 9.00 mm THRU'	REF SECTION C-C
D.3	9.00	63.50	Ø 9.00 mm THRU'	REF SECTION C-C
E.1	9.00	32.00	Ø 52.00 mm THRU'	REF SECTION A-A

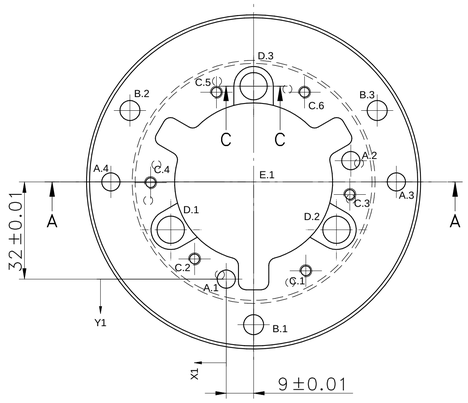


SCALE/ÉCHELLE 1:1




SECTION C-C
SCALE/ÉCHELLE 1:1

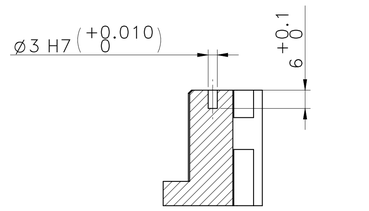

SECTION D-D
SCALE/ÉCHELLE 1:1 (1)

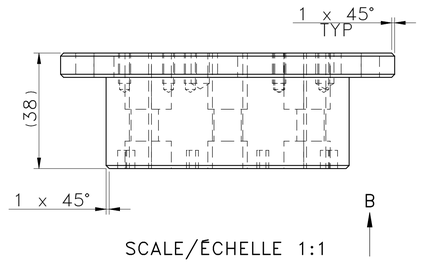


SCALE/ÉCHELLE 1:1

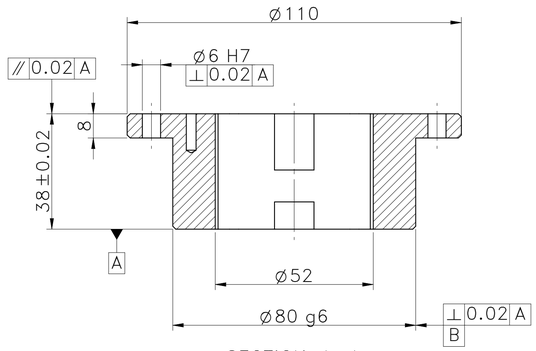


SECTION A-A
SCALE/ÉCHELLE 1:1


HOLE TABLE - BOTTOM VIEW (1)				
Hole	X	Y	Size	REMARK
(1) A.1	0.00	0.00		
(1) B.1	-34.71	6.12	Ø 3.00 mm x 6.00 mm DEEP	H7
(1) B.2	-32.01	-5.64	Ø 3.00 mm x 6.00 mm DEEP	H7
(1) B.3	-12.06	-33.12	Ø 3.00 mm x 6.00 mm DEEP	H7
(1) B.4	11.12	-30.54	Ø 3.00 mm x 6.00 mm DEEP	H7
(1) B.5	34.71	-6.12	Ø 3.00 mm x 6.00 mm DEEP	H7
(1) B.6	32.01	5.64	Ø 3.00 mm x 6.00 mm DEEP	H7
(1) B.7	12.06	33.12	Ø 3.00 mm x 6.00 mm DEEP	H7
(1) B.8	-11.12	30.54	Ø 3.00 mm x 6.00 mm DEEP	H7

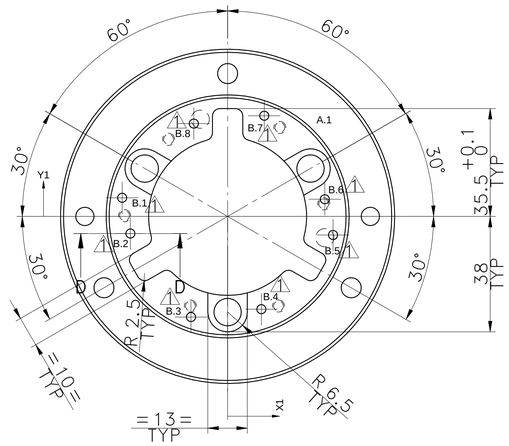

VIEW B
SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 1:1

NOTE:
USE HELICOIL INSERT AT ALL TAPPING HOLES

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: HE 30
FINISH: SELF-ANODIZING
MACHINING: 3.2(1.6/)
WEIGHT(Kg): 0.32 kg

NOTE :-(French)
MATÉRIEL : HE 30
FINITION : SELF-ANODIZING
MACHINES : 3.2(1.6/)
POIDS (Kg): 0.32 kg

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED
UNSP.RADII 0.5 R | UNSP.CHF 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
(1)	HOLES ADDED (REFER HOLE TABLE- BV)	24/01/25	03006330

wipro PARI
www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT, ASK TEAM MEMBER

WIPRO PARI GROUP

DESCRIPTION: HOUSING
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
56.18 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. --- | PART CLASS. B | HEAT TREATMENT ---

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006751	03004785	03002882	#
24/01/2025	24/01/2025	24/01/2025	NET WEIGHT-Kg 0.32 kg

DRG./PART CODE: P23Y5B076175
REV.: 01
SCALE: 1 : 1
SHEET: 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E:\DM Uploading\2022 - 23\P23Y5\P23Y5B076175.dft