
NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

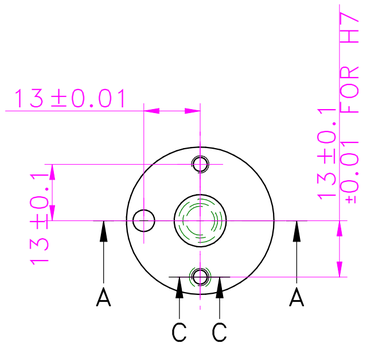



SCALE/ÉCHELLE 1:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.


NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

HEAT TREATMENT :–(English)
1) TO BE HARDENED UPTO 32–35 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )


TRAITEMENT DE CHALEUR :– (French)
1) À RENFORCER JUSQUÀ 32–35 HRC.
2) RE–TARAUDAGE À FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (S'IL Y A LIEU)

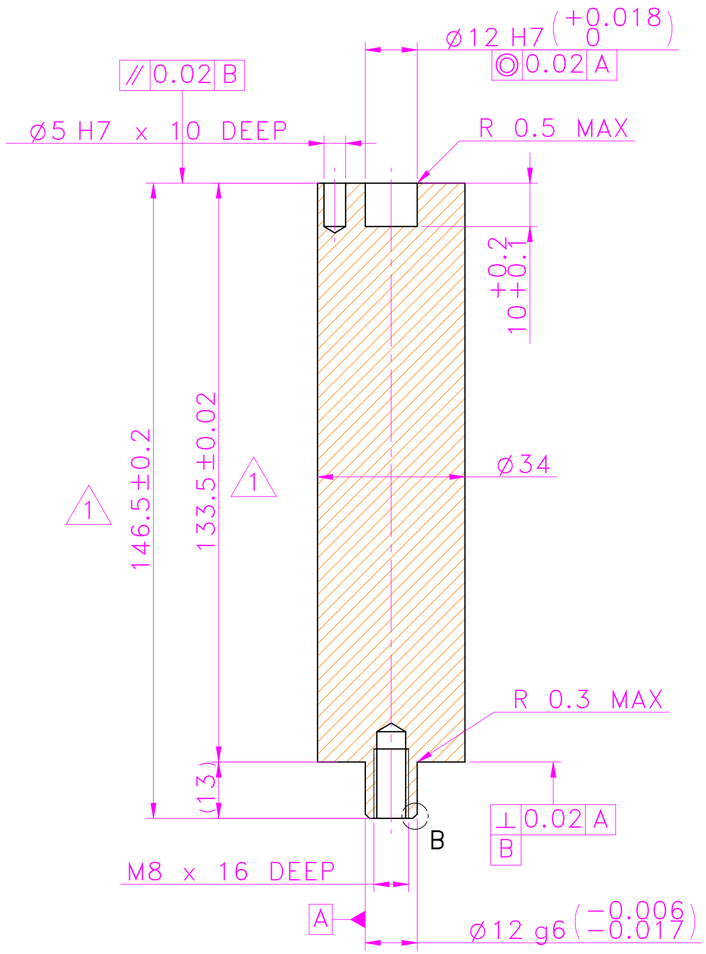



SECTION A–A
SCALE/ÉCHELLE 1:1

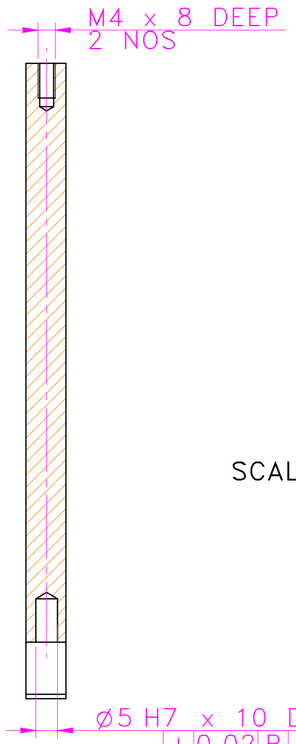


SECTION C–C
SCALE/ÉCHELLE 1:1




DETAIL B
SCALE/ÉCHELLE 2:1



SCALE/ÉCHELLE 1:2

NOTE : (English)
# MATERIAL: EN24
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING: 3.2/ (0.8)
# WEIGHT(Kg ): 0.94 kg

NOTE :–(French)
# MATÉRIEL : EN24
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES : 3.2/ (0.8)
# POIDS (Kg): 0.94 kg

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP.RADII 0.5 R | UNSP.CHF. 0.5 X 45° |
| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |
| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |
| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |
| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| 1 | HEIGHT CHANGED | 06.07.2024 | 7272 |

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: OP 1050 - ITEM 2
DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 27.70 in^2 | # | # | WPES | 0300 | PL-02 | A2 |

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT | REF NOTE

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 03006751 | 03004785 | 03002882 | # | P23Y5B099002 | 01 | 1 : 1 |
| 06/07/2024 | 06/07/2024 | 06/07/2024 | NET WEIGHT-Kg 0.94 kg | | | SHEET 1 OF 1 |

RESERVED SPACE FOR CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B099002.dft