



NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

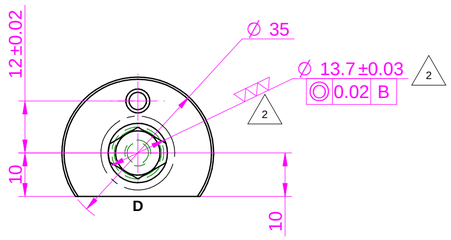


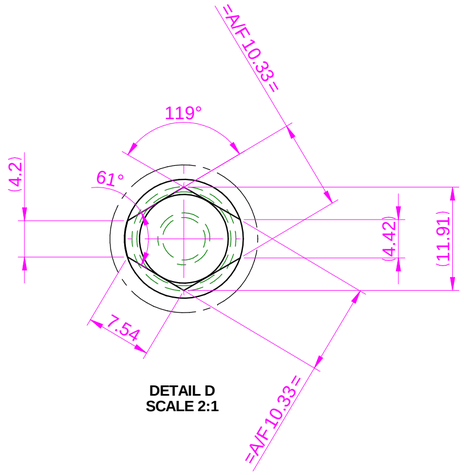


DETAIL D
SCALE 2:1



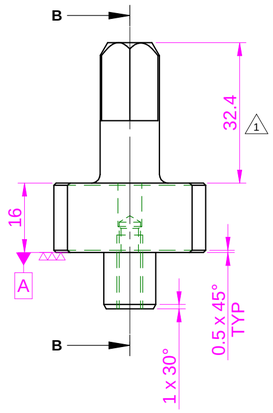

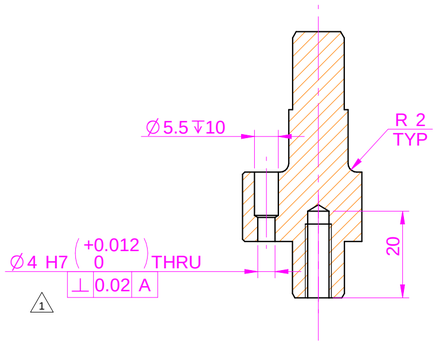

SECTION B-B
SCALE 1:1

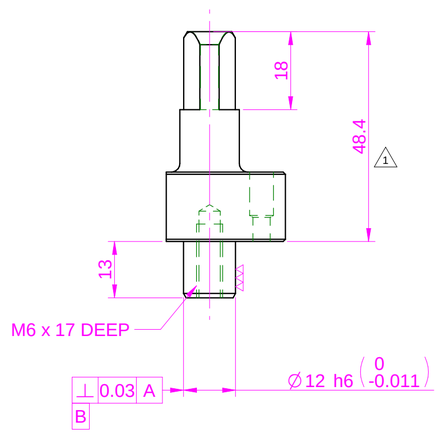

H.T.PROCESS	: REF. NOTE
HARDNESS & DEPTH	: REF. NOTE
FINISH & DEPTH	: REF. NOTE
TEST COUPON SIZE	:(∅x20 QTY - 02NOS)
WELD CLASS	: B IF APPLICABLE

MTC REPORT REQURIED
NON DESTRUCTIVE TESTING

RAW MATERIAL	HEAT TREATMENT	FINISH COMPOMENT
UT	DP+UT	MPI

HEAT TREATMENT NOTE:- 1

1) THROUGH HARDENING 40~45 HRC
2) THREADS TO BE KEEP SOFT.
3) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE :
MATERIAL : C45/EN9
FINISH : QPQ
MACHINING : ▽▽(▽▽▽)

NOTE:
1)QPQ FILM THICKNESS 0.2~0.3 MICRONS

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
2	EXTRA GRINDING SYMBOL REMOVED & RELATED GRINDING SYMBOL ADDED.	10.10.2025	03002987
1	DIM. CHANGED FROM 34.5 TO 32.4 & 50.5 TO 48.4, TOLERANCE ADDED, PART CLASS CHANGED TO T+S HEAT TREATMENT NOTE CORRECTED	31.07.2025	02009474

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: DIAMOND PIN
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
8.55 in^2	QPQ	#	WPP	0100	PL-01	A2

REFERENCE DWG. ---- | PART CLASS. T+S 1 | HEAT TREATMENT REF. DRG

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
VRD	2876	3568	#	P24CQF120042	02	1 : 1
10/10/2025	10/10/2025	10/10/2025	NET WEIGHT-Kg 0.14 kg			SHEET 1 OF 1

\\pune\gnnew\BT\00\ENGG\24-25\P24CQ_FORD_PHEV BATTERY PACK LINE\Exfm Uploading\P24CQF12_DIAMOND PIN-2.drt