NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

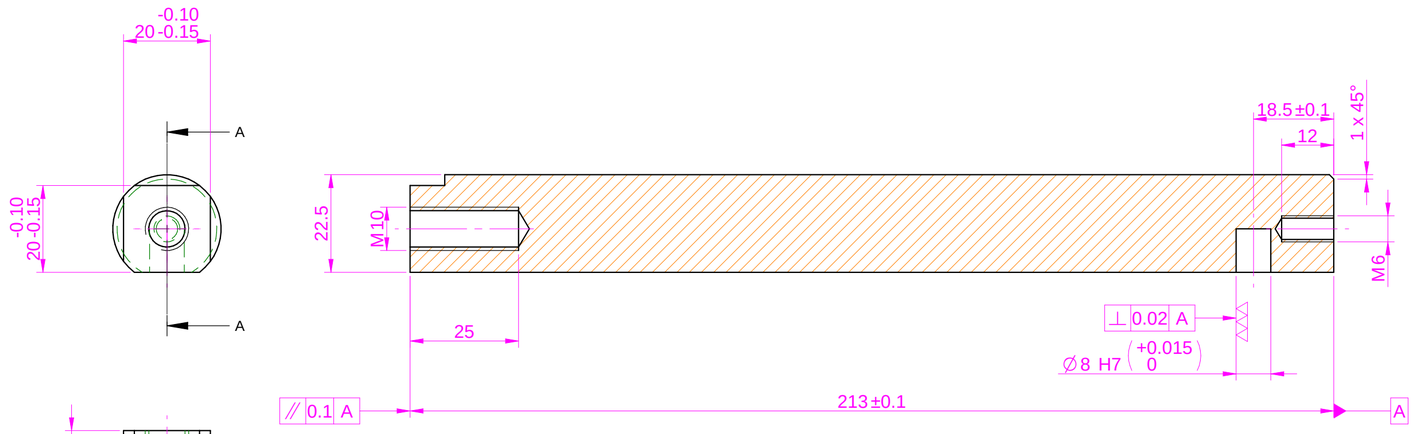

SECTION A-A
SCALE 1:1

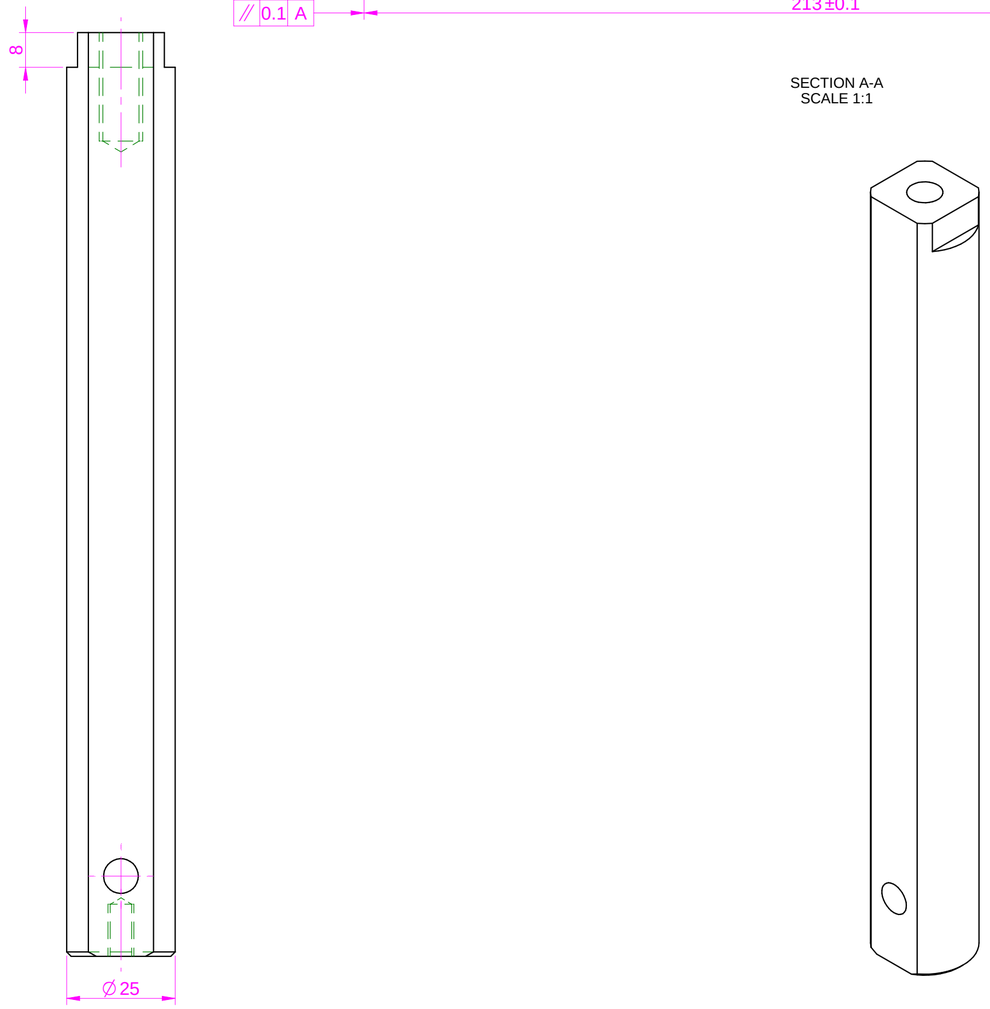

NOTE :
MATERIAL : Steel - Alloyed:1.7147 , 20MnCr5
FINISH : I.Z.B.P. (TRIVALENT)
MACHINING : ▽▽(▽▽▽)

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

HEAT TREATMENT NOTE:-

1) TO BE CASE HARDENED UPTO 55 ~ 60 HRC.
2) CASE DEPTH 0.8~ 2 mm AFTER FINISH GRINDING.
3) THREADS TO BE KEEP SOFT
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

RESERVED SPACE FOR ... MM

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION						DRAWING TYPE
SHAFT						MACHINING
SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
28.63 in^2	#	#	WPP	0100	PL-01	A2
REFERENCE DWG.	--	PART CLASS.	B	HEAT TREATMENT	--	

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
PCS	NITIN G	SANDEEP J	#	P24DKB011169	00	1 : 1
24/11/2025	24/11/2025	24/11/2025	NET WEIGHT-Kg 0.75 kg			SHEET 1 OF 1

\\srv01101\Ex\M Uploading\2024-25\P24DKP24DKB011169.drt