


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00





SECTION A-A
SCALE 1:1

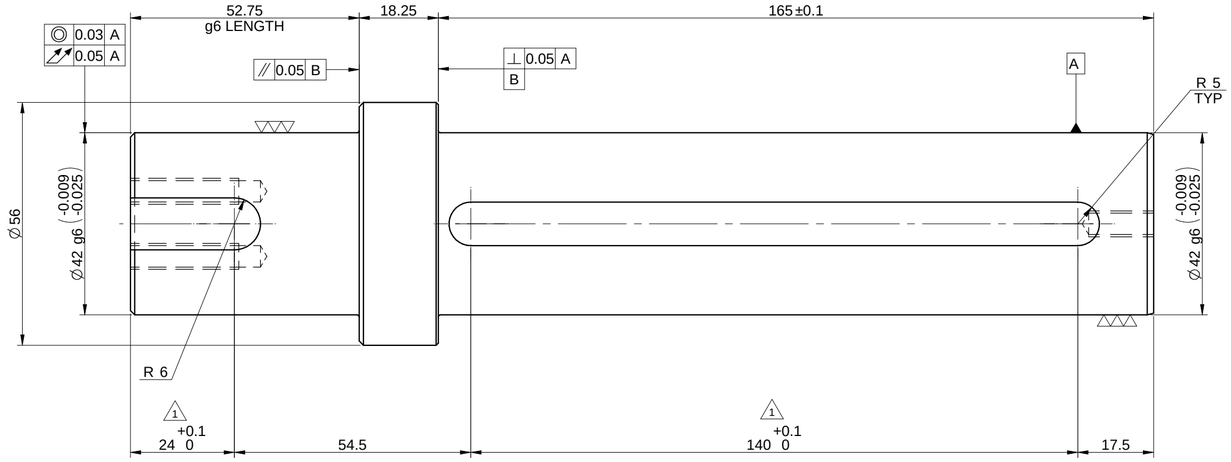





SECTION B-B
SCALE 1:1

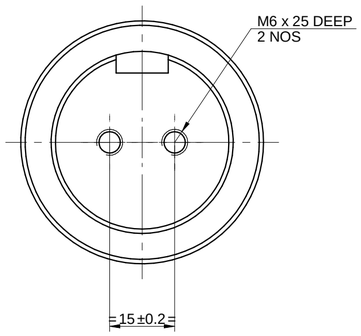

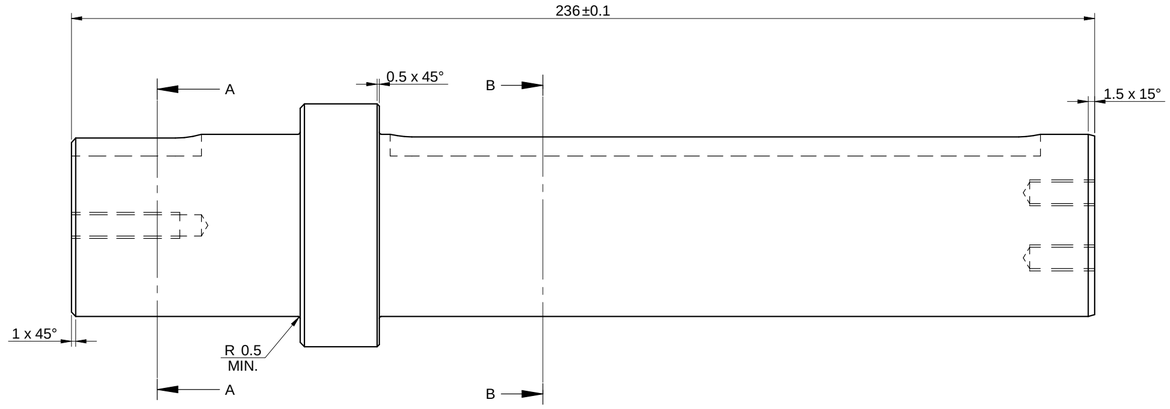



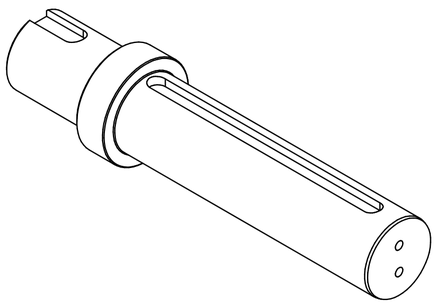

NOTE :- 1) $ TO BE TOUGHENED UPTO 40-45 HRC.
2) # HARD CHROME PLATING 20 TO 30 MICRONS, HARDNESS 850 TO 1000 HV.
3) GRINDING TO BE DONE BEFORE AND AFTER PLATING.
4) MAINTAIN ALLTHE DIMENSIONS AFTER PLATING

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE
CONTROLLED COPY
STAMP

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	KEYWAY LENGTH AND WIDTH MODIIFIED	24/12/2024	6648

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **SHAFT**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
61.26 in^2	#	▽▽(▽▽▽)	WPP	0100	PL-01	A2

REFERENCE DWG.	---	PART CLASS.	B	HEAT TREATMENT	$ REF. NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03007508	03007348	03002519	EN24	P24T9A011078	01	1 : 1
24/12/2024	24/12/2024	24/12/2024	NET WEIGHT-Kg 2.63 kg			SHEET 1 OF 1

\\pariengginew\BT10ENGG\24-25\P24T9 - KOEL Kagal Engine Assy Line\Ex3DM Uploading\P24T9A011078.dft