


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-00

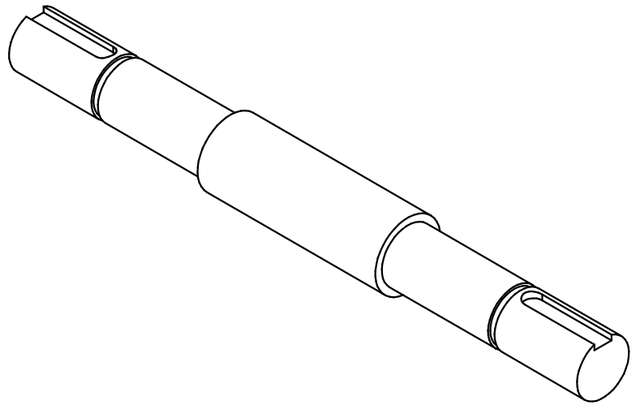


ISOMETRIC VIEW
SCALE 1:1

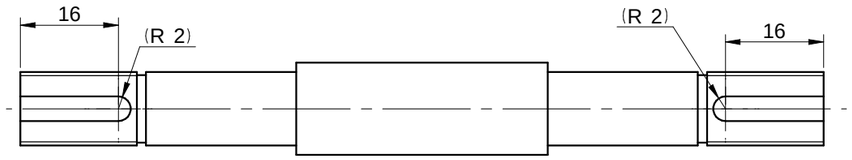


TOP VIEW




SECTION X-X
SCALE 1:1

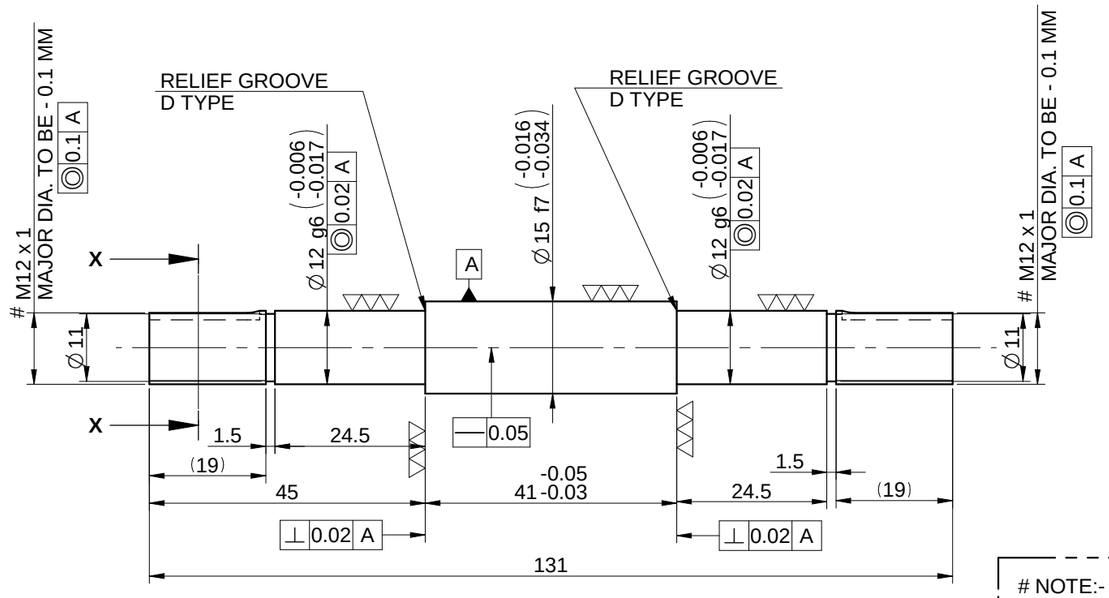


FRONT VIEW

# NOTE:-
TO BE SUITED WITH
4R0210110010 (LOCK NUT LOCKING WASHER TYPE_KM1_SKF)

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 28-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED. | |
|---|---|
| UNSP.RADII 0.5 R | UNSP.CHF. 0.5 X 45° |
| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1 ° |
| 10 UP TO 50 | ±0 °30' |
| 50 UP TO 120 | ±0 °20' |
| 120 UP TO 400 | ±0 °10' |
| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DCR. NO. | DATE | DRN.BY |
|---|---|---|---|---|
| | | | | |
| | | | | |

PARI
www.parirobotics.com

PRECISION AUTOMATION & ROBOTICS INDIA LTD

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION: **PIVOT PIN**

DRAWING TYPE: MACHINING

| SURFACE AREA | FINISH | MACHINING | MATERIAL : | NET WEIGHT-Kg: | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 9.02 in^2 | HARD CHROME PLATING | ▽▽(▽▽▽) | EN-8 | 0.13 kg | PL-02 | A3 |

| DRN.BY | CHKD.BY | APPD.BY | REFERENCE DWG. | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| MAYUR V | UTK[illegible] | RUPESH | GL45808430 | **PRK65B204044** | **0** | 1 : 1 |
| 06/05/2019 | | | PART CLASS. B | | | SHEET 1 OF 1 |
| DATE | 06/05/2019 | 06/05/2019 | | | | |

\\parienggNEW\BT060ENGG\18-19\PRK650000000-MSIL Gantry\ExDM Uploading\PRK65B204044.dft