

NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-01



TOP VIEW / vue de dessus
SCALE/ÉCHELLE 1:2



FRONT VIEW / vue de face
SCALE/ÉCHELLE 1:2

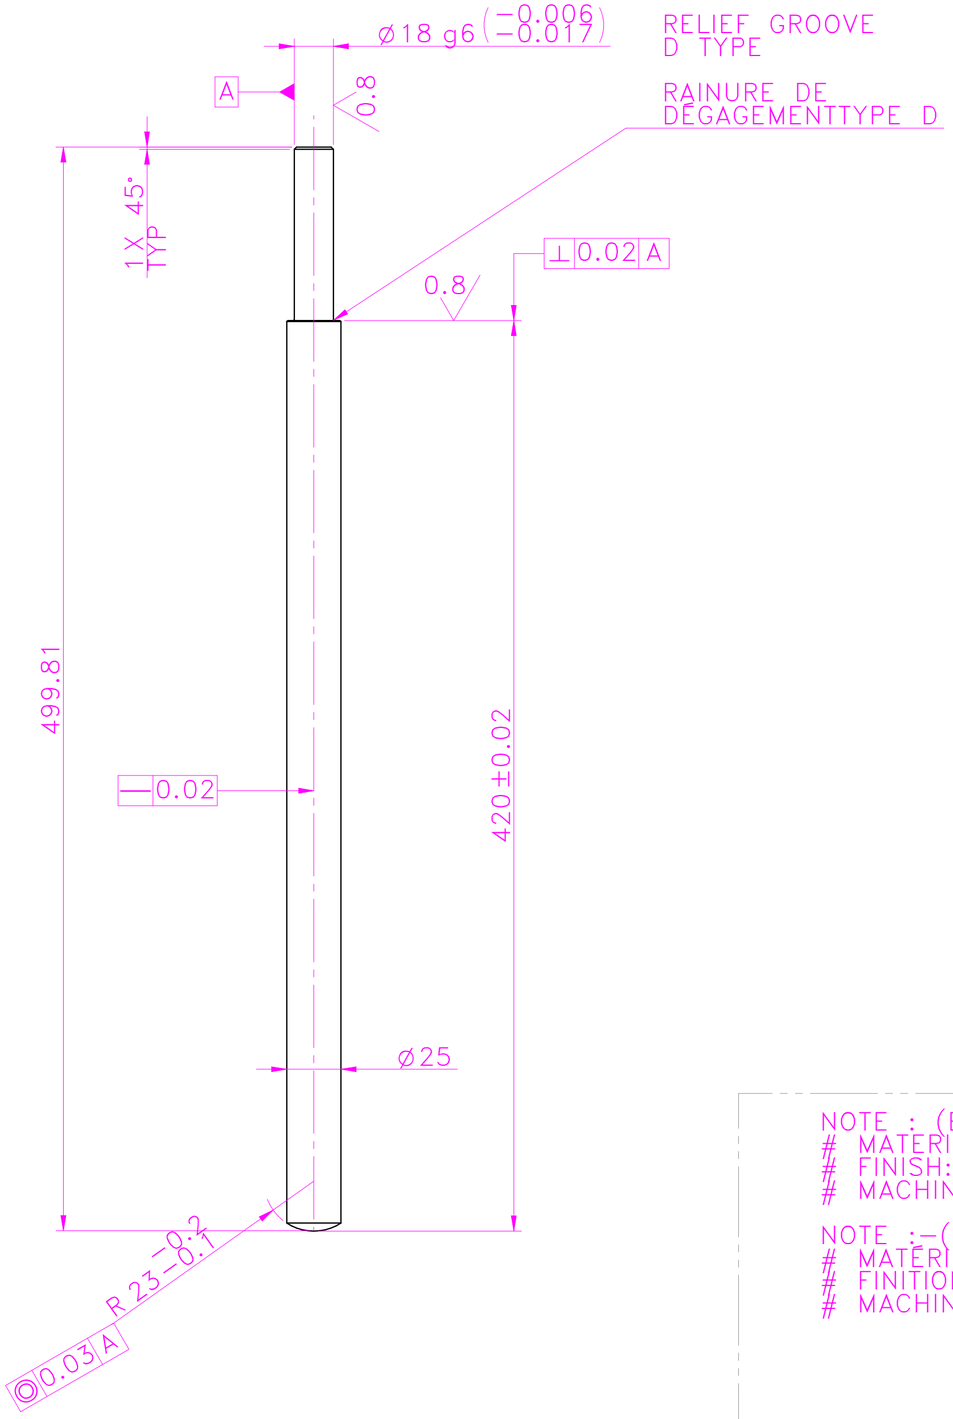

1
ENGRAVE
" PRK79D309017_ROD FOR OP60-62"

ISOMETRIC VIEW /vue isométrique
SCALE/ÉCHELLE 1:2

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: 20MnCr5
FINISH: ENP
MACHINING: 3.2 (0.8)

NOTE :-(French)
MATÉRIEL : 20MnCr5
FINITION : ENP
MACHINES : 3.2 (0.8)

REVISION	DESCRIPTION	DATE	DRN.BY
1	ENGRAVE NOTE ADDED.	24/01/2020	NAMDEO

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2

LIMITS
Gen Tol.: IS 2102

PARI
www.paririobotics.com

PRECISION AUTOMATION & ROBOTICS INDIA LTD

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION: SHAFT
DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
59.17 in^2	#	#	#	1.77 kg	PL - 02	A2

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
AJIT	SHIVA G	SHIVA G	---	PRK79D309017	1	1 : 5
24/01/2020			PART CLASS.			SHEET
DATE	24/01/2020	24/01/2020	B			1 OF 1

\\parienggnew\BT030 ENGG\Design 18-19\PRK79000000-PSA Drive Shaft\ExDM_Uploading\PRK79D309017.dft