\\pariengg\new\BT060ENGG\19-20\PRM85- Machining Line_Daimler AG\ExDM_Uploading\PRM85B013083.dft

NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A

PFR/DES/07/REV-01

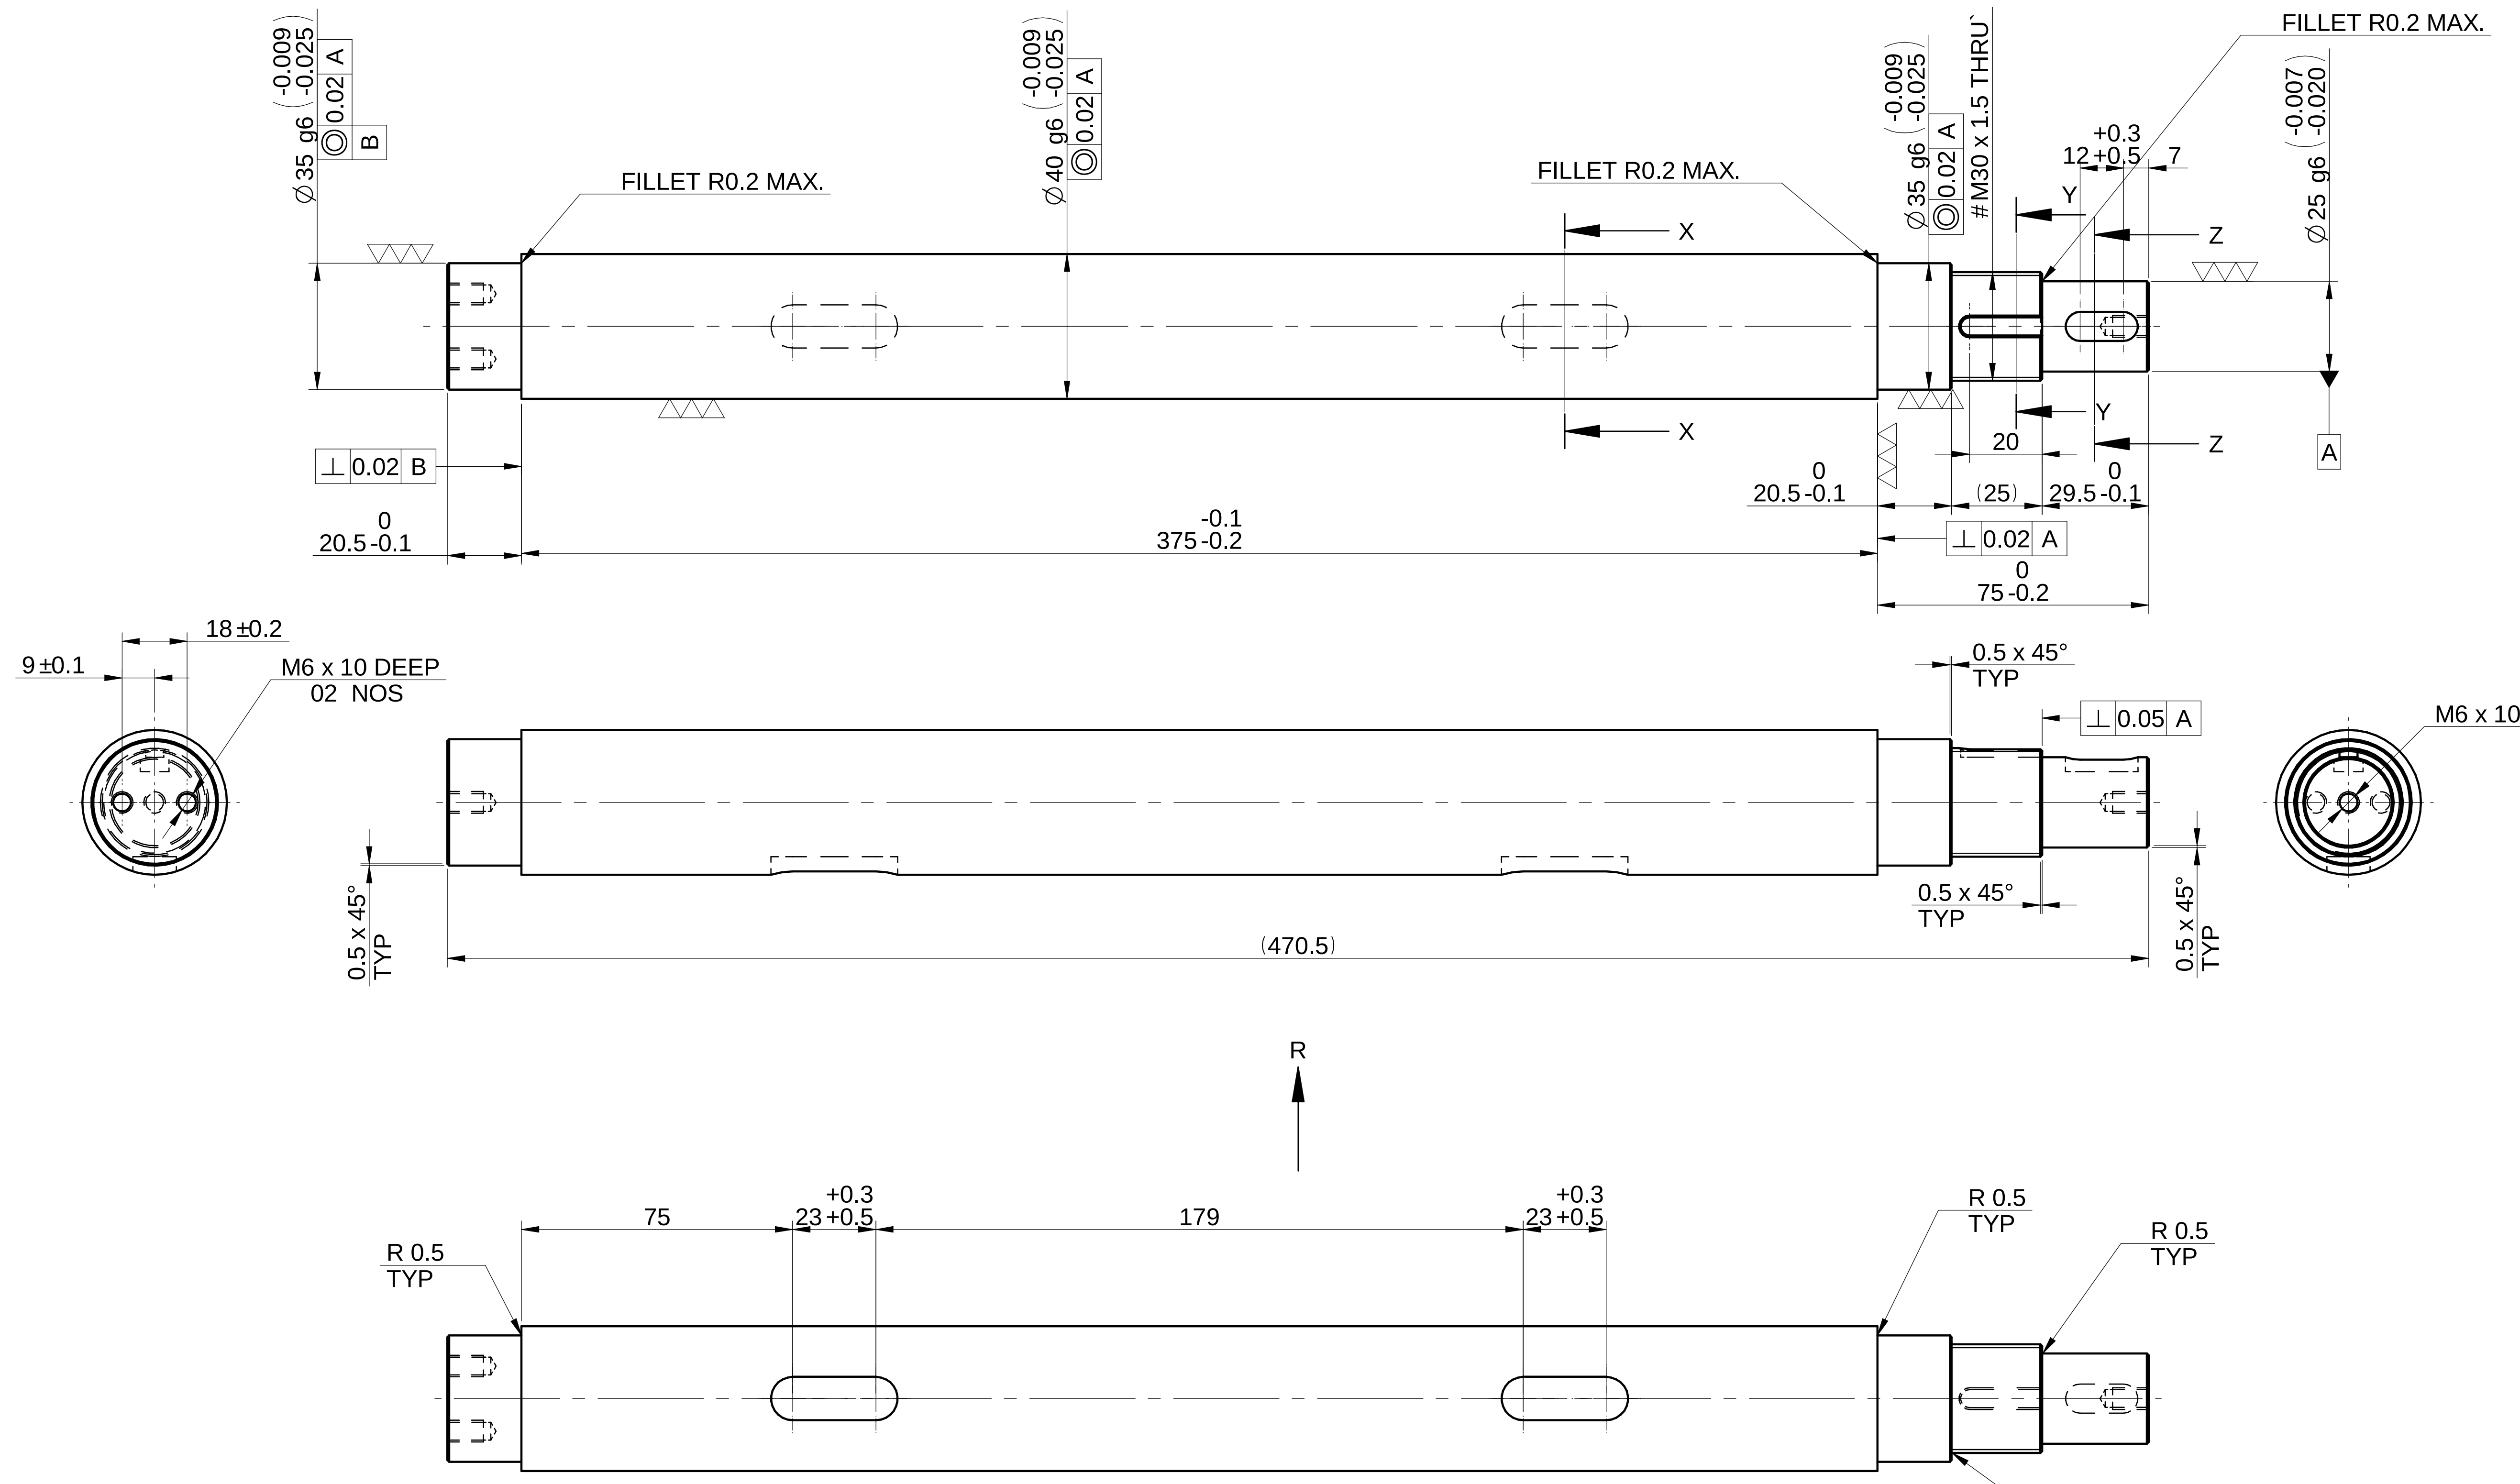

VIEW R
SCALE 1:2

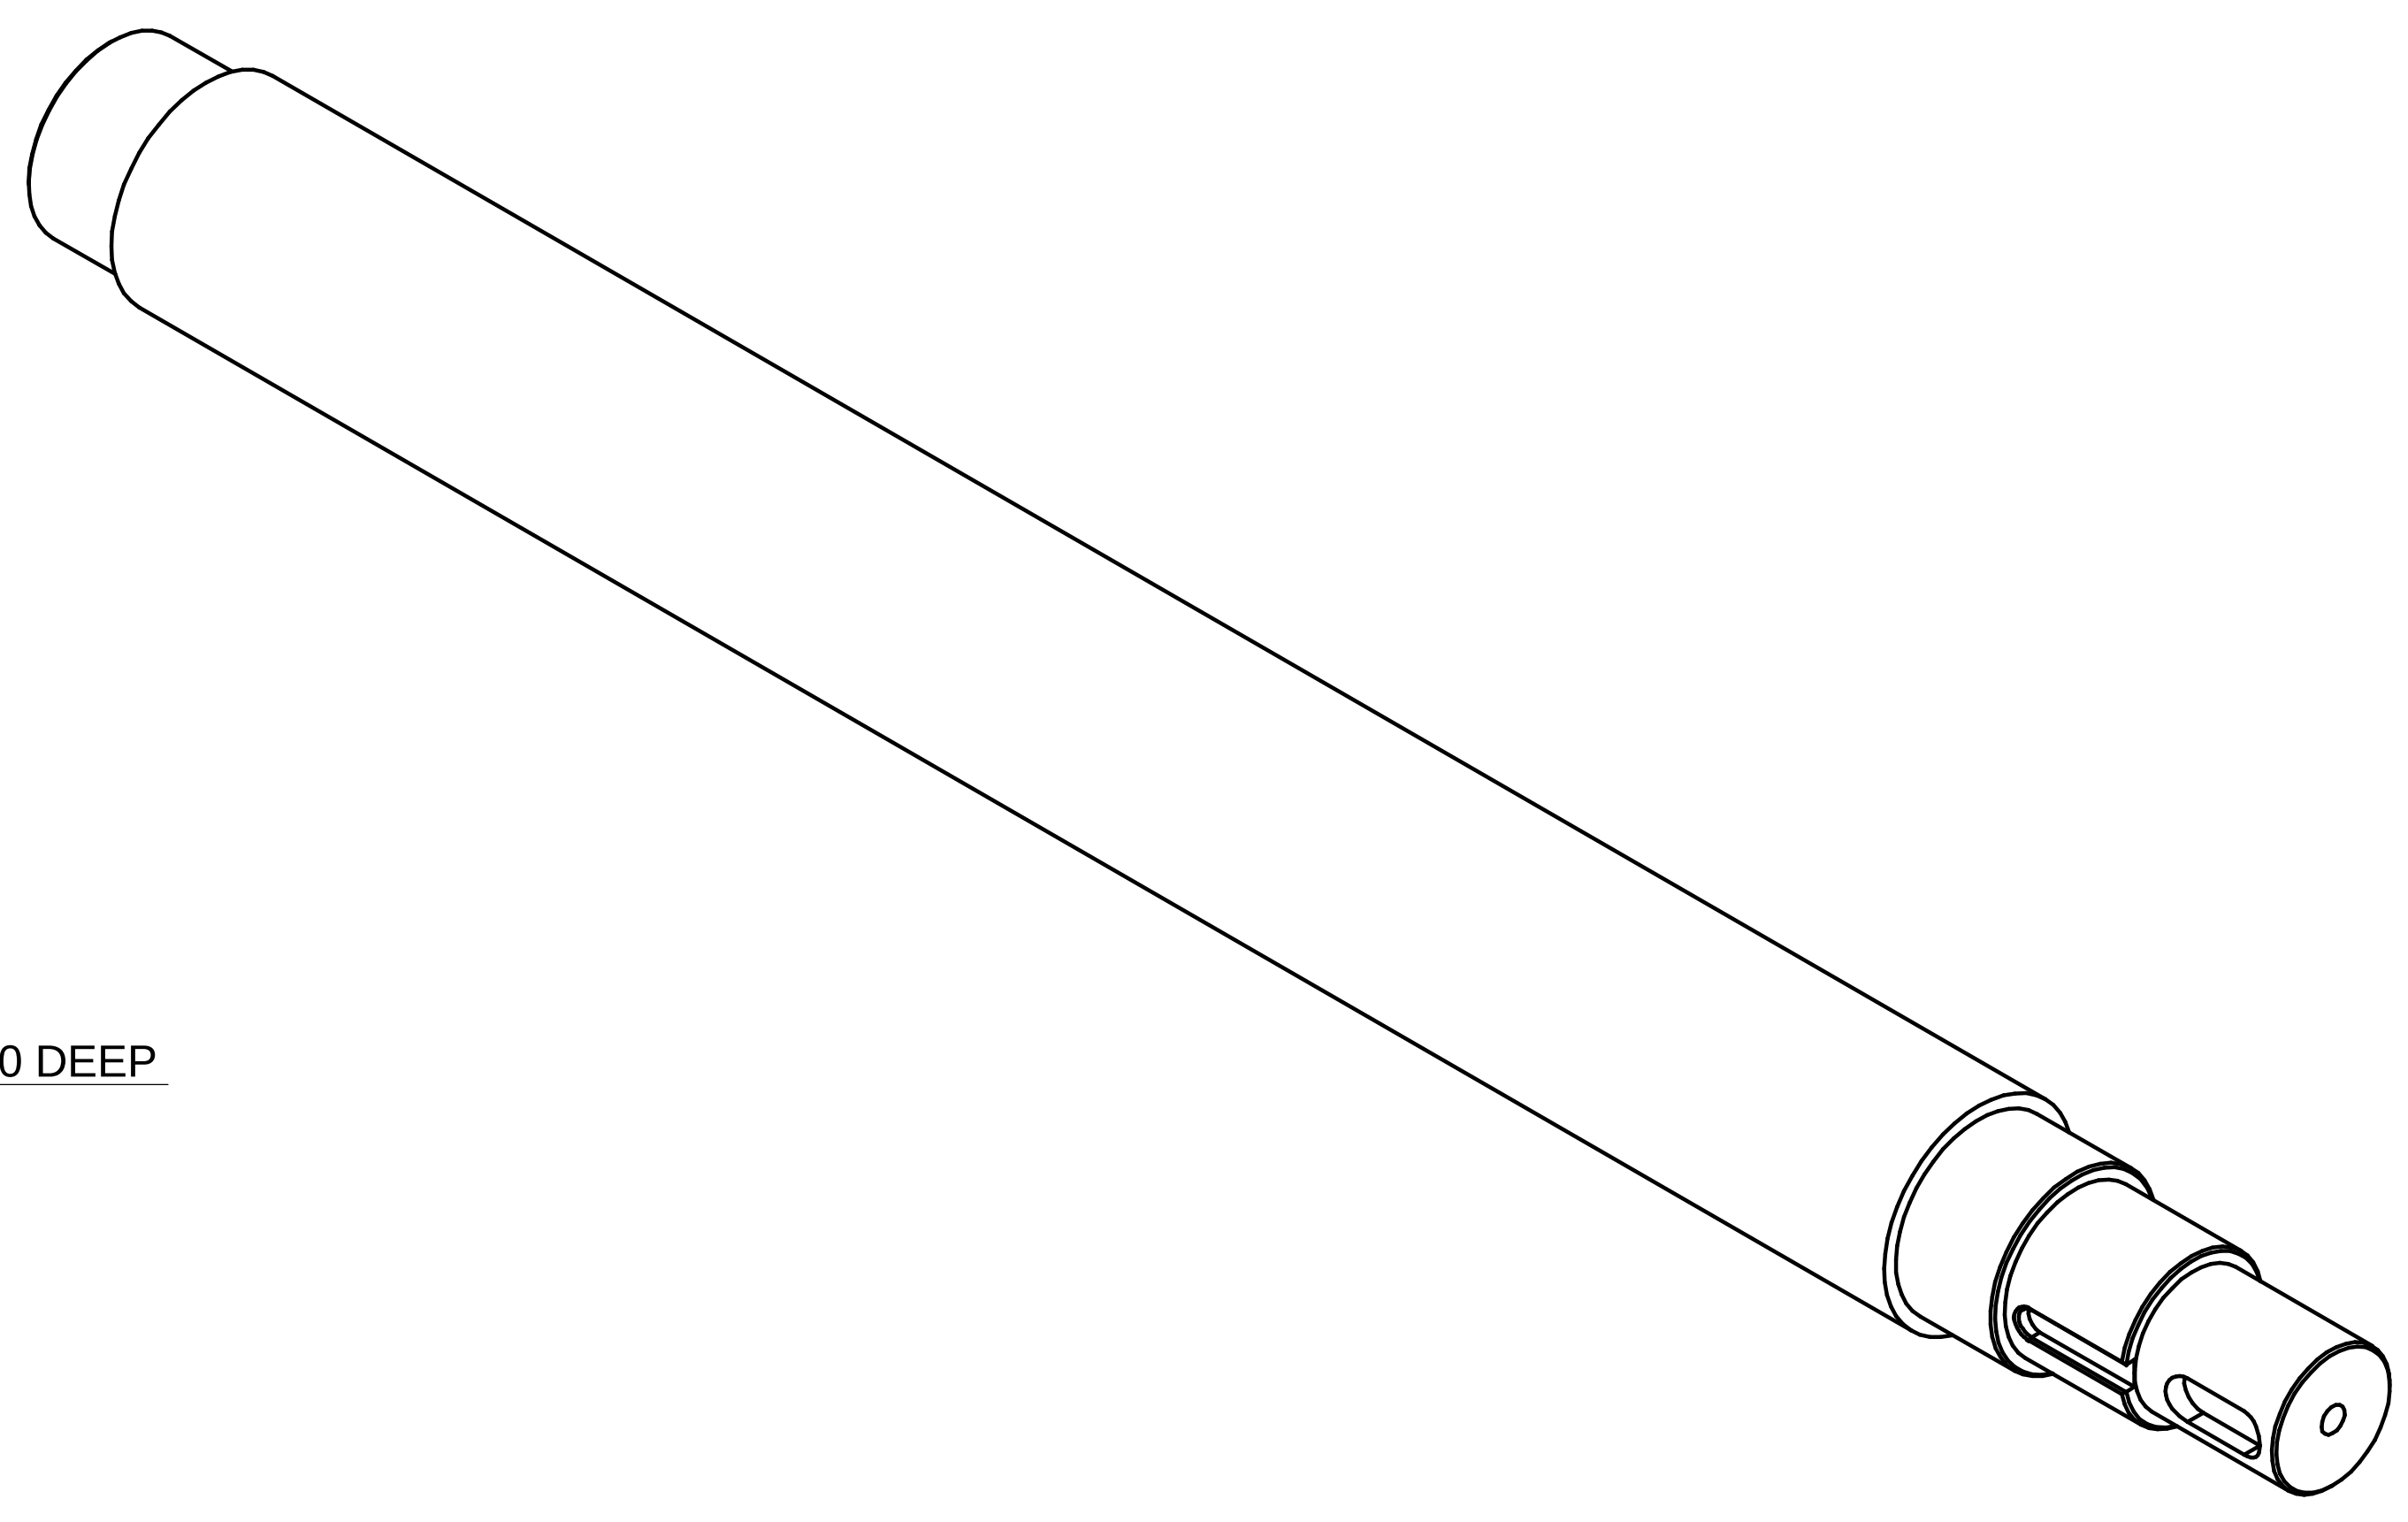

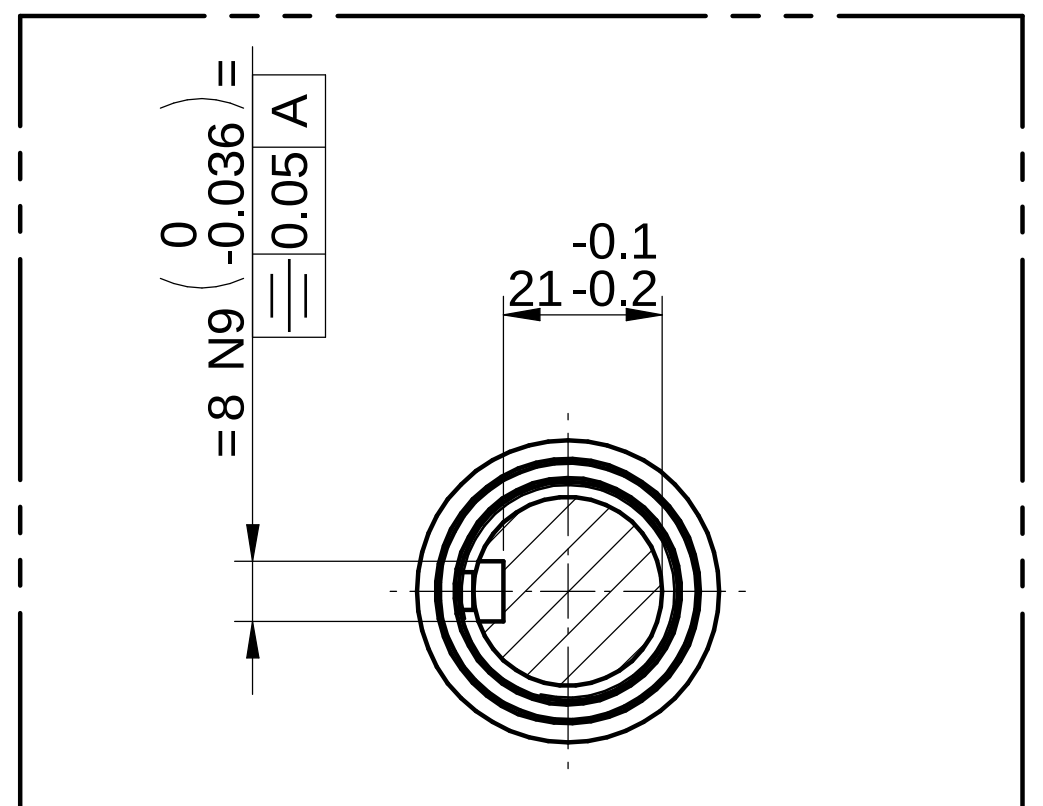

SECTION Z-Z
SCALE 1:2

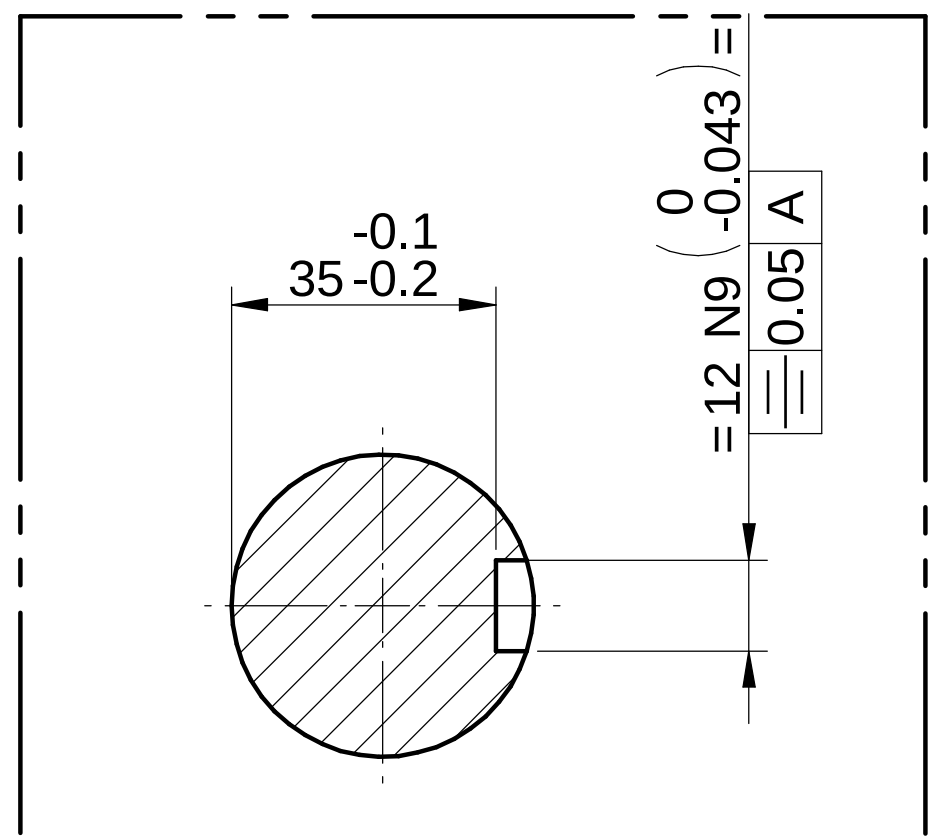

SECTION X-X
SCALE 1:2

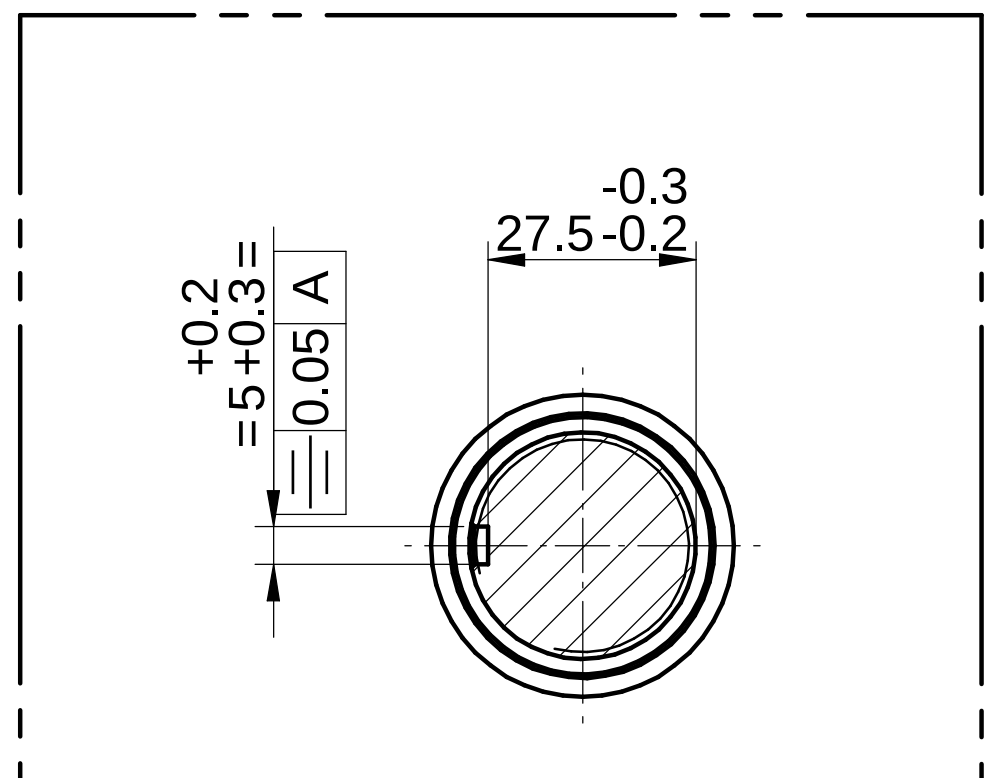

SECTION Y-Y
SCALE 1:2

△1

$ NOTE: FINISH - FERRINOX
PROCESS- GAS NITROCARBURISING WITH OXIDATION
SURFACE HARDNESS - 720HV TO 740HV
CASE DEPTH 0.2 TO 0.3 MM
OXIDE LAYER - 3-4 MICRON.

INSPECTION &TEST REQUIREMENT NOTE:-
FINISH JOB ULTRASONIC TEST REPORT REQUIRED

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 28-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT
AT SUPPLIER END.(IF APPLICABLE)

TO BE SUITED WITH 4R0210110050

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0 °50'
50 UP TO 120	±0 °25'
120 UP TO 400	±0 °15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
△1	FINISH CHANGED	03/11/2020	ROHIT Z

PRECISION AUTOMATION & ROBOTICS INDIA LTD

www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION **SHAFT**							DRAWING TYPE MACHINING
SURFACE AREA 93.35 in^2	FINISH $ △1		MACHINING ▽▽(▽▽▽)	MATERIAL : EN9	NET WEIGHT-Kg: 4.17 kg	TEAM NO. PL-02	SHEET SIZE A2
DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG. ---	DRG./PART CODE		REV.	SCALE 1 : 2
RAM D	UTKARSH J	UTKARSH J	PART CLASS. B	**PRM85B013083**		1	SHEET 1 OF 1
03/11/2020							
DATE	03/11/2020	03/11/2020					