NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-03

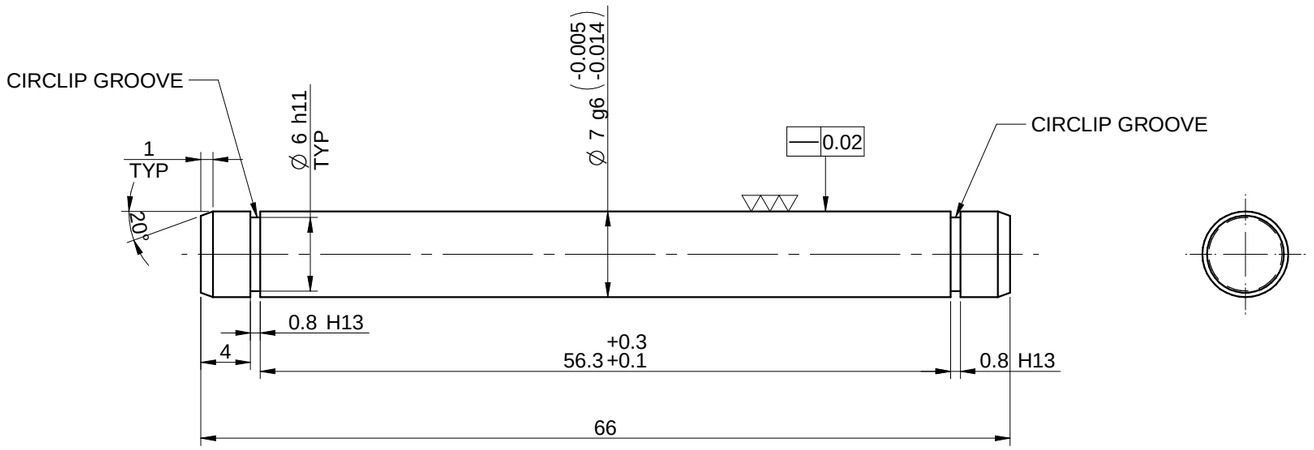

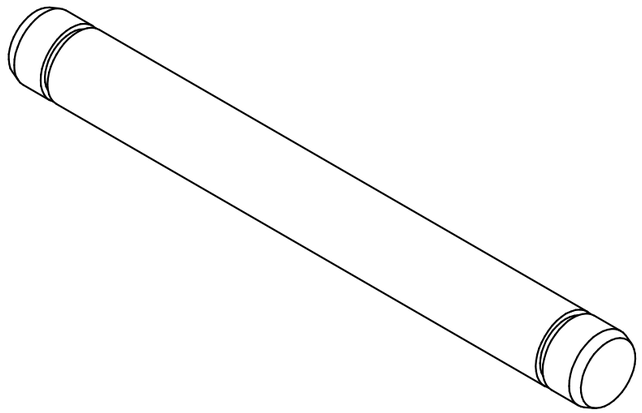

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

HEAT TREATMENT NOTE:-

1) TO BE TOUGHENED UPTO 28-32 HRC.
2) REMOVE ALL SHARP EDGES & CORNERS.

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR
CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : --

PRECISION AUTOMATION AND ROBOTICS INDIA PRIVATE LIMITED

DESCRIPTION: **SHAFT**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
2.40 in^2	IZBP	▽▽(▽▽▽)	EN8	0.02 kg	PL - 01	A3

SURFACE FINISH ▽▽▽▽ ▽▽▽ ▽▽ ▽ HEAT TREATMENT

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
VAIBHAV S	SRK	SRK	PRS85A322012	**PRS85A281021**	**00**	2:1
16/05/2022	16/05/2022	16/05/2022	PART CLASS. B			SHEET 1 OF 1

\parienggnew\ExDM Uploding\PRS85\PRS85A281021.dft