
NOTE : STANDARD FASTENER TORQUES AS PER PST-DES-07-REV-04

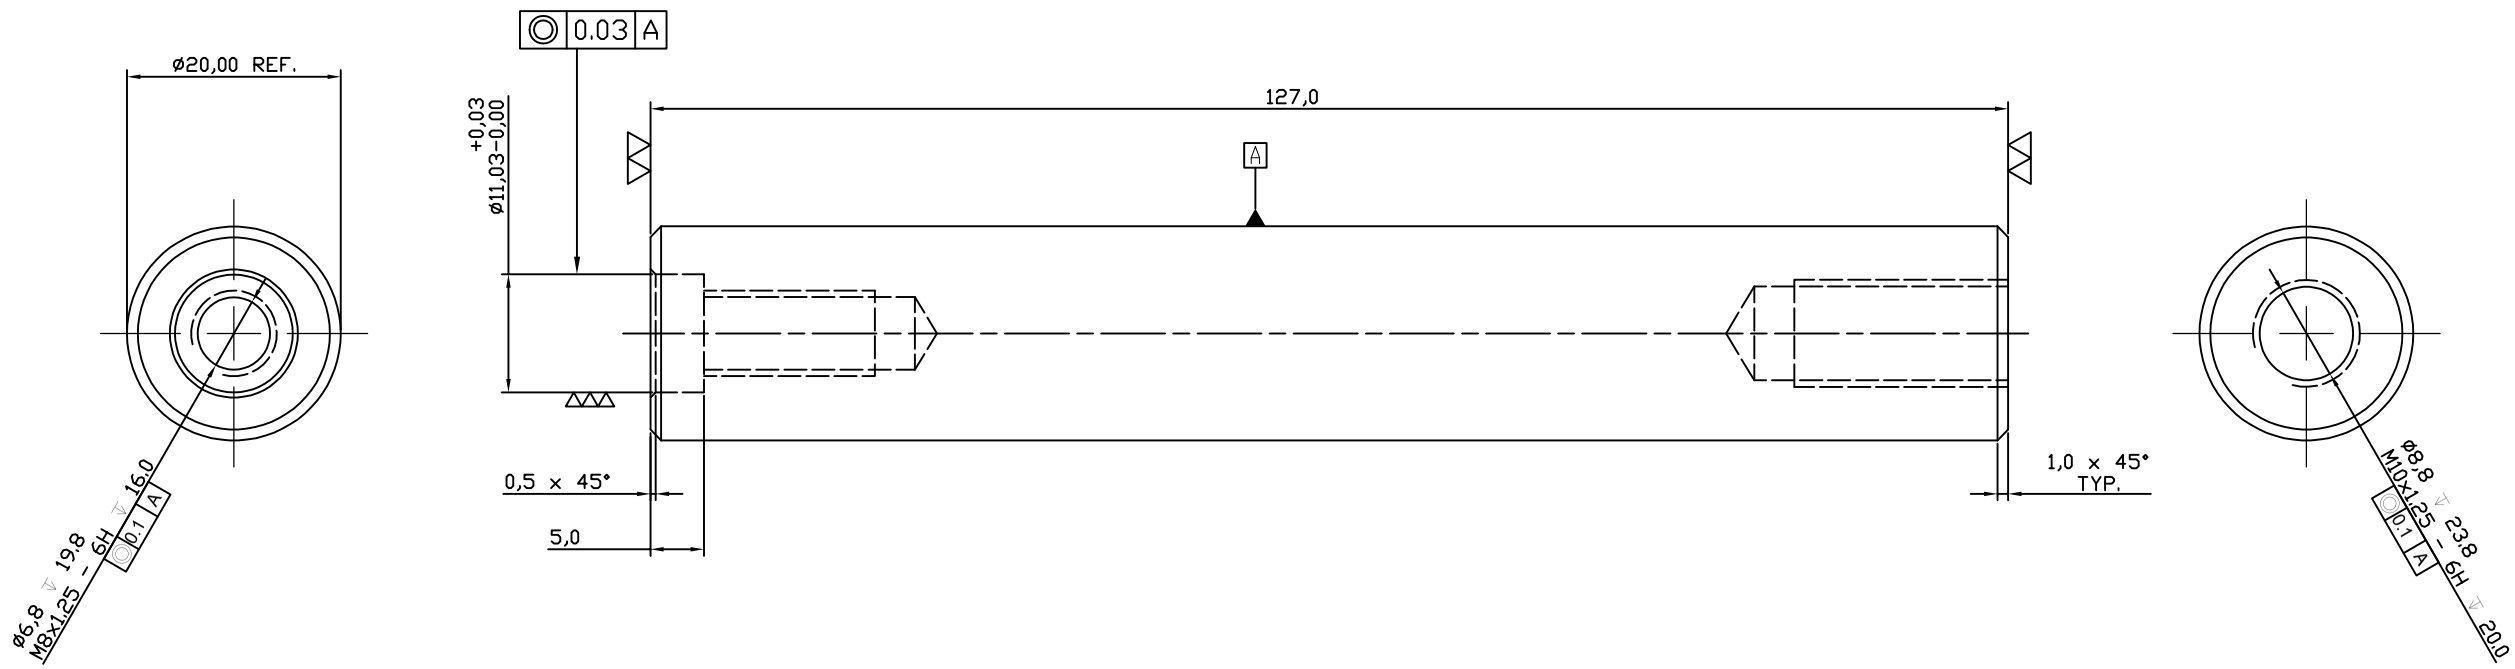

02 SHAFT
(1) ~ REQ'D
MAT: REWORK
STK: 20mm DIA. x 130mm
FINISH: REWORK
STAMP: PRT84F150002
REWORK FROM 4G0150110010

METRIC MACHINING TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLACE DECIMALS= ±1.0mm
1 PLACE DECIMALS= ±0.3mm
2 PLACE DECIMALS= ±0.13mm
3 PLACE DECIMALS= ±0.013mm
MACHINED ANGLES= ±.5°

REMOVE ALL BURRS AND BREAK SHARP EDGES 0.5mm MAX.

CHAMFER ALL TAPPED HOLES 45° TO 1.0mm OVER TAP SIZE

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°30'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

NOTE FOR WIPRO PARI DESIGN-REF.ONLY
WEAR DETAILS:- MW

CONTROLLED COPY
CONTROLLED COPY STAMP

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT, ASK TEAM MEMBER

LOCATIONPUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI PRIVATE LIMITED
[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION							DRAWING TYPE
REWORK SHAFT							PART
SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE	
---	REF NOTE	~,(▽▽ ▽▽▽)	REF NOTE	REF NOTE	PL-01	A2	
SURFACE FINISH ▽▽▽ ▽▽ ▽ ~				HEAT TREATMENT. ---			
DRN.BY	CHK.D.BY	APRD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE	
RPD	ASK	SRK	---	PRT84F150002	00	1:1	
20.10.22	20.10.22	20.10.22	PART CLASS. B			SHEET 1 OF 1	