



NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-04

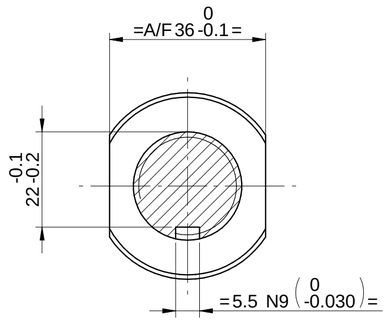

SECTION A-A
SCALE 1:1

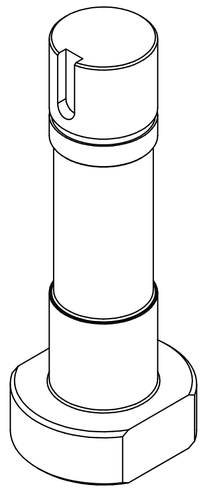

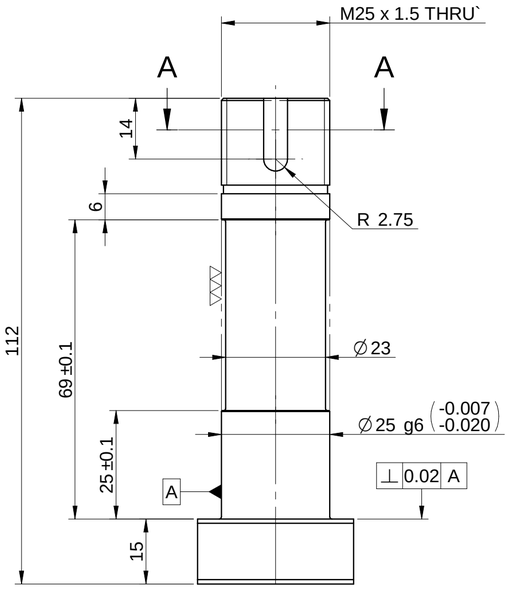

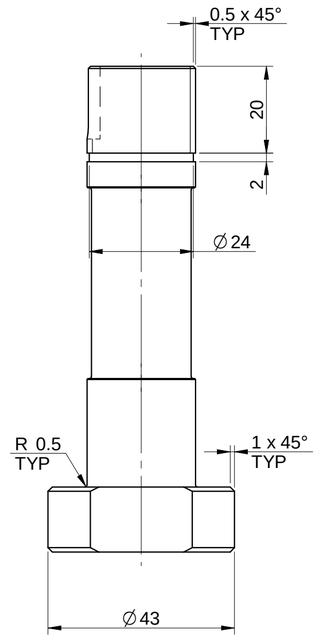

HEAT TREATMENT NOTE:-

1) TO BE CASE HARDENED UPTO 55 ~ 60 HRC.
2) CASE DEPTH 0.8~ 2 mm AFTER FINISH GRINDING.
3) THREADS TO BE KEEP SOFT
4) REMOVE ALL SHARP EDGES & CORNERS.

NOTE :
MATERIAL : 20MnCr5
FINISH : IZBP
MACHINING : ▽▽

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI PRIVATE LIMITED
[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION: **SHAFT**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
18.78 in^2	#	#	#	0.50 kg	PL-01	A2

SURFACE FINISH ▽▽▽ ▽▽▽ ▽▽ ▽ HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
HRUSHI	ABN	SRK	PRV59J200037	**PRV59D200217**	**00**	1 : 1
10/04/2023	10/04/2023	10/04/2023	PART CLASS. B			SHEET 1 OF 1

\\parilengg\ST108\ENGG\2022-23\SO_PRV59_Ford Cologne CX740 Battery\EXCDM_Uploading\OP90_62-30D384841_1-41.dft