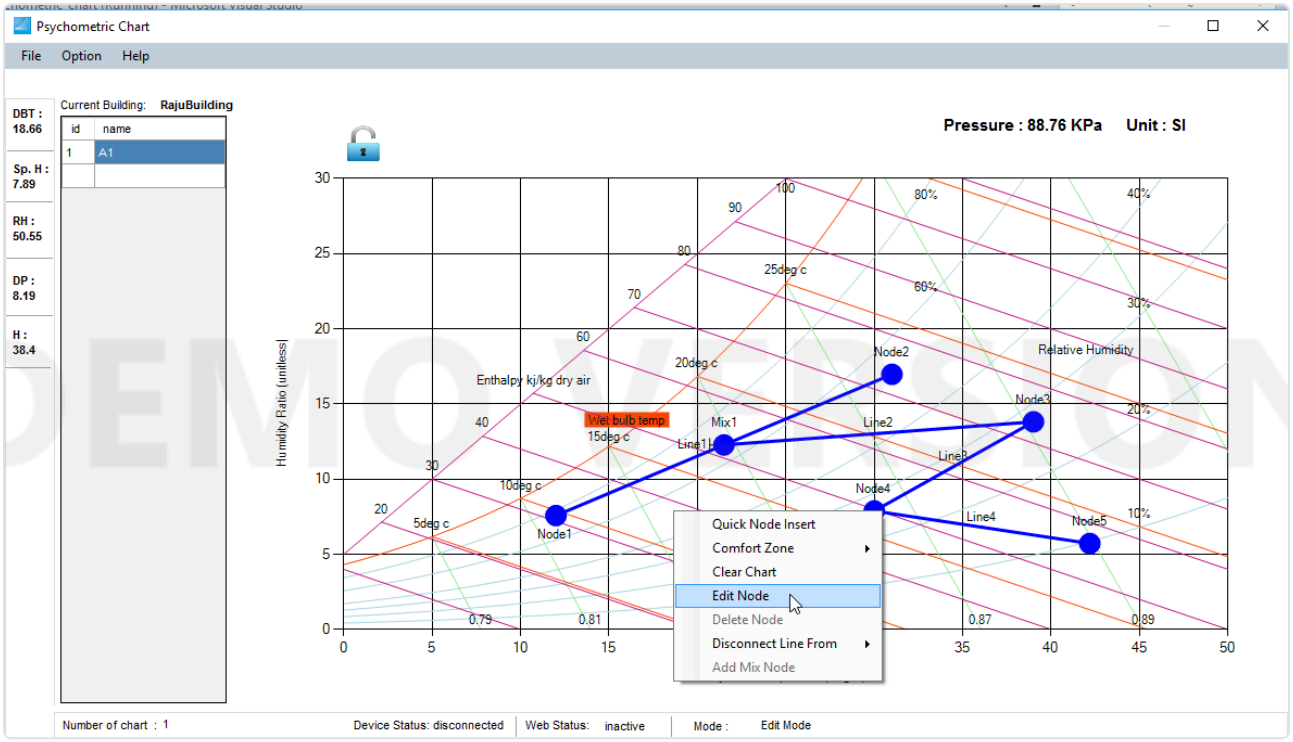
TEMCO LEARN

# Psychrometric Tool

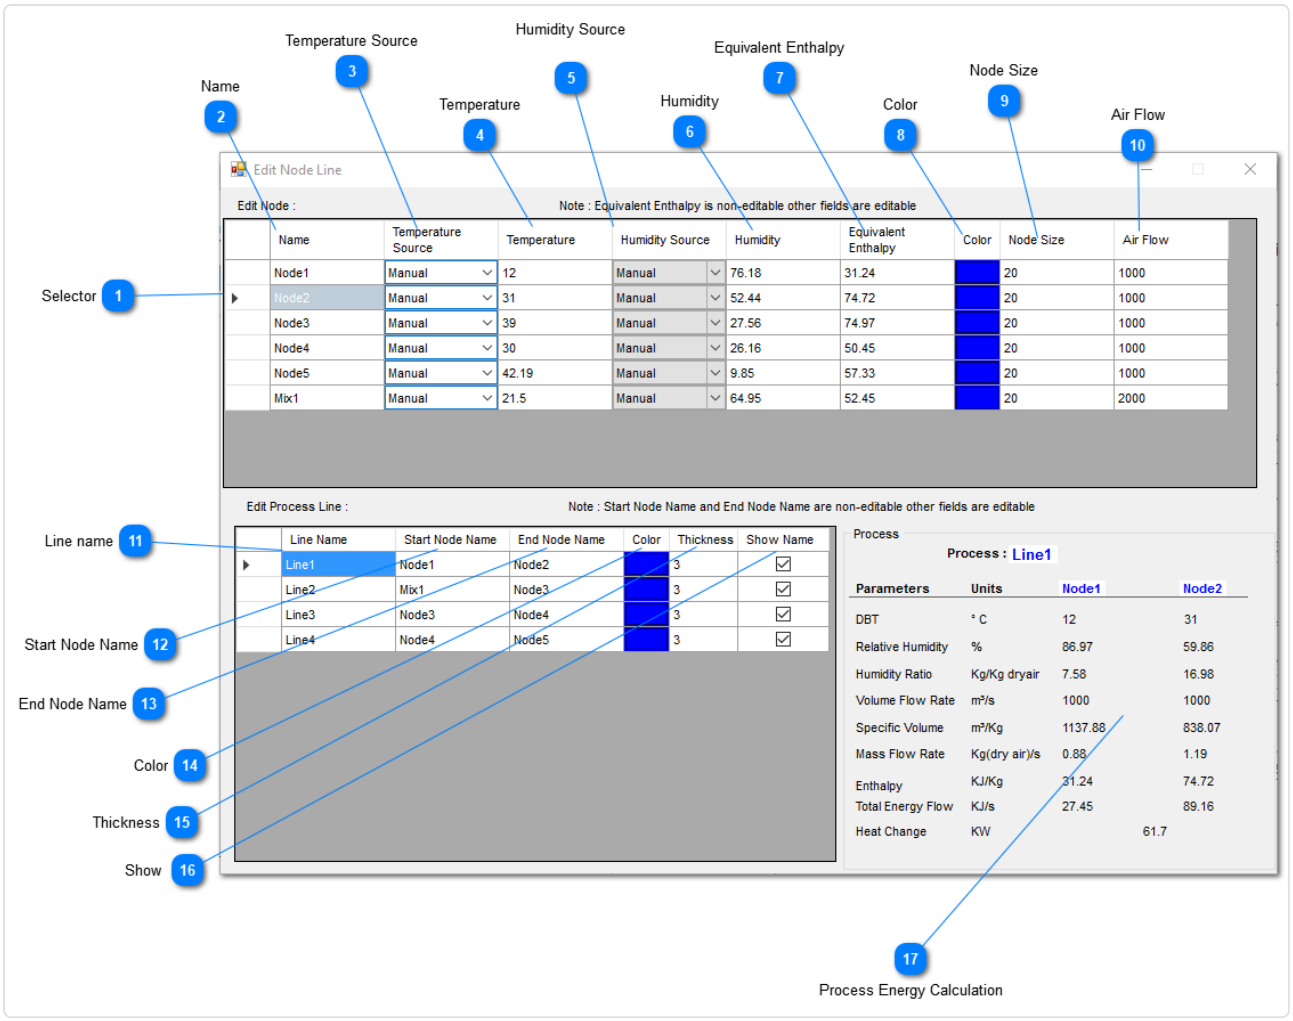
Node Grid View · built Nov 12, 2026

## Node Grid View

This is strong part of our tool. We can see and edit node and process line properties. To see the node grid view, right click on the chart and 'Edit Node'  as shown below:




Once you click, you will see the following grid view pop up.




1


## Selector



Node Selector

2

## Name



It shows Node name

3

## Temperature Source

| Temperature Source |
| --- |
| Manual |
| Manual |
| Manual |
| Manual |
| Manual |
| Manual |

It shows the source of temperature data. It may be from T3000(device) or nearest weather station (Web) or simulated (Manual).

4

## Temperature

| Temperature |
| --- |
| 12 |
| 31 |
| 39 |
| 30 |
| 42.19 |
| 21.5 |

It shows the temperature value.

5

## Humidity Source

| Humidity Source |
| --- |
| Manual |
| Manual |
| Manual |
| Manual |

It shows the source of humidity data. It may be from T3000(device) or nearest weather station (Web) or simulated (Manual).




## Humidity

| Humidity |
| --- |
| 76.18 |
| 52.44 |

It shows the temperature value.




## Equivalent Enthalpy

| Equivalent Enthalpy |
| --- |
| 31.24 |
| 74.72 |
| 74.97 |
| 50.45 |

It shows the equivalent enthalpy (calculted from Temperature and Humidity)





## Color

| Color |
| --- |
| |

It shows the node color.




## Node Size




It shows the node size.





## Air Flow




It shows the Air flow value.





## Line name




It shows the process line name connecting two nodes.





## Start Node Name




It shows the name of Starting Node of the particular process line.



## End Node Name




It shows the name of Ending Node of the particular process line.





## Color




It shows the color of process line.





## Thickness




It shows the thickness of process line in chart.




## Show




User has option to show the line name or not. If user doesnot want to show Process Line name, he/she can untick.



## Process Energy Calculation

Process

**Process : Line1**

| Parameters | Units | Node1 | | Node2 |
|---|---|---|---|---|
| DBT | ° C | 12 | | 31 |
| Relative Humidity | % | 86.97 | | 59.86 |
| Humidity Ratio | Kg/Kg dryair | 7.58 | | 16.98 |
| Volume Flow Rate | m³/s | 1000 | | 1000 |
| Specific Volume | m³/Kg | 1137.88 | | 838.07 |
| Mass Flow Rate | Kg(dry air)/s | 0.88 | | 1.19 |
| Enthalpy | KJ/Kg | 31.24 | | 74.72 |
| Total Energy Flow | KJ/s | 27.45 | | 89.16 |
| Heat Change | KW | | 61.7 | |

This portion shows different energy calculation of the selected process line.