ANSYS 2021 R1

37_5deg

Analyst	temis	
Date	5/21/2021 04:19 PM	

Table of Contents

1 System Information

2 Geometry and Mesh

2.1 Mesh Size

2.2 Mesh Quality

2.3 Orthogonal Quality

3 Simulation Setup

3.1 Physics

3.1.1 Models

3.1.2 Material Properties

3.1.3 Cell Zone Conditions

3.1.4 Boundary Conditions

3.1.5 Reference Values

3.2 Solver Settings

4 Run Information

5 Report Definitions

6 Plots

7 Contours

8 Pathlines

9 XY Plots

System Information

Application	Fluent	
Settings	3d, density-based implicit, SST k-omega	
Version	21.1.0-10179	
Source Revision	49a2c352da	
Build Time	Nov 20 2020 15:49:11 EST	
СРИ	Intel(R) Core(TM) i7-8550U	
os	Windows	

Geometry and Mesh


Mesh Size

Cells	Faces	Nodes
423869	926311	122557

Mesh Quality

Name	Туре	Min Orthogonal Quality	Max Aspect Ratio
solid	Mixed Cell	0.10678494	241.74095

Orthogonal Quality

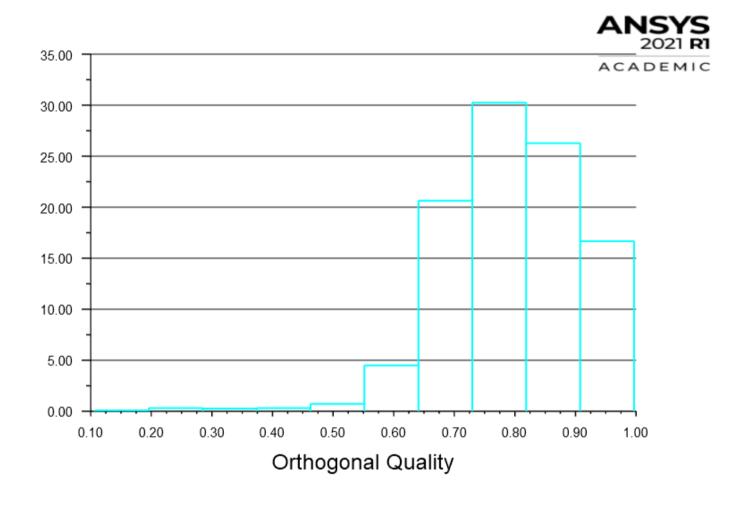

Simulation Setup

Physics

Models

Model	Settings
Space	3D
Time	Steady
Viscous	SST k-omega turbulence model
Heat Transfer	Enabled

Material Properties

- Fluid	
— air	
Density	ideal gas
Cp (Specific Heat)	kinetic theory
Thermal Conductivity	kinetic theory
Viscosity	kinetic theory
Molecular Weight	28.966 kg/kmol
L-J Characteristic Length	3.711 Angstrom
L-J Energy Parameter	-194.55 K
Thermal Expansion Coefficient	0
Degrees of Freedom	5
Speed of Sound	none
- Solid	
— aluminum	
Density	2719 kg/m^3
Cp (Specific Heat)	871 J/(kg K)
Thermal Conductivity	202.4 W/(m K)

Cell Zone Conditions

- Fluid	
- solid	
Material Name	air
Specify source terms?	no
Specify fixed values?	no
Frame Motion?	no
Laminar zone?	no
Porous zone?	no

3D Fan Zone? no

Boundary Conditions

Inlet	
- inlet	
Gauge Pressure [Pa]	1951
Mach Number	8
Temperature [K]	58
Coordinate System	Cartesian (X, Y, Z)
Component of Flow Direction (x,y,z)	(1, 0, 0)
Turbulent Specification Method	Intensity and Length Scale
Turbulent Intensity [%]	0.01
Turbulent Length Scale [m]	0.001
Outlet	
- outlet	
Backflow Reference Frame	Absolute
Gauge Pressure [Pa]	1951
Pressure Profile Multiplier	1
Backflow Total Temperature [K]	58
Backflow Direction Specification Method	Normal to Boundary
Turbulent Specification Method	Intensity and Length Scale
Backflow Turbulent Intensity [%]	0.01
Backflow Turbulent Length Scale [m]	0.001
Acoustic Wave Model	Off
Backflow Pressure Specification	Total Pressure
Build artificial walls to prevent reverse flow?	no
Radial Equilibrium Pressure Distribution	no
Average Pressure Specification?	no
Specify targeted mass flow rate	no

- Symmetry	
symmetry	symmetry
- Wall	
- capsula	
Wall Thickness [m]	0
Heat Generation Rate [W/m^3]	0
Material Name	aluminum
Thermal BC Type	Heat Flux
Heat Flux [W/m^2]	0
Wall Motion	Stationary Wall
Shear Boundary Condition	No Slip
Wall Surface Roughness	0
Wall Roughness Height [m]	0
Wall Roughness Constant	0.5
Convective Augmentation Factor	1

Reference Values

Area	7.6 m^2
Density	0.1171881 kg/m^3
Enthalpy	804122.5 J/kg
Length	3.74 m
Pressure	1950.999 Pa
Temperature	58.00007 K
Velocity	1221.355 m/s
Viscosity	1.7894e-05 kg/(m s)
Ratio of Specific Heats	1.4
Yplus for Heat Tran. Coef.	300
Reference Zone	solid

Solver Settings

- Equations	
Flow	True

Turbulence	True
- Numerics	
Absolute Velocity Formulation	True
Under-Relaxation Factors	
Turbulent Kinetic Energy	0.8
Specific Dissipation Rate	0.8
Turbulent Viscosity	1
Solid	1
Discretization Scheme	
Flow	Second Order Upwind
Turbulent Kinetic Energy	Second Order Upwind
Specific Dissipation Rate	Second Order Upwind
— Time Marching	
Solver	Implicit
Courant Number	5
- Solution Limits	
Minimum Absolute Pressure [Pa]	1
Maximum Absolute Pressure [Pa]	5e+10
Minimum Temperature [K]	1
Maximum Temperature [K]	5000
Minimum Turb. Kinetic Energy [m^2/s^2]	1e-14
Minimum Spec. Dissipation Rate [s^-1]	1e-20
Maximum Turb. Viscosity Ratio	100000

Run Information


Number of Machines	1	
Number of Cores	3	
Case Read	10.568 seconds	
Iteration	3478 seconds	
AMG	1567.04 seconds	

Virtual Current Memory	1.40287 GB
Virtual Peak Memory	1.56333 GB
Memory Per M Cell	2.96742


Report Definitions

t_max	942.7227 K	
p_max	196452.2 Pa	
cm	-0.0531969	
cl	0.5912986	
cd	0.9638007	


Plots

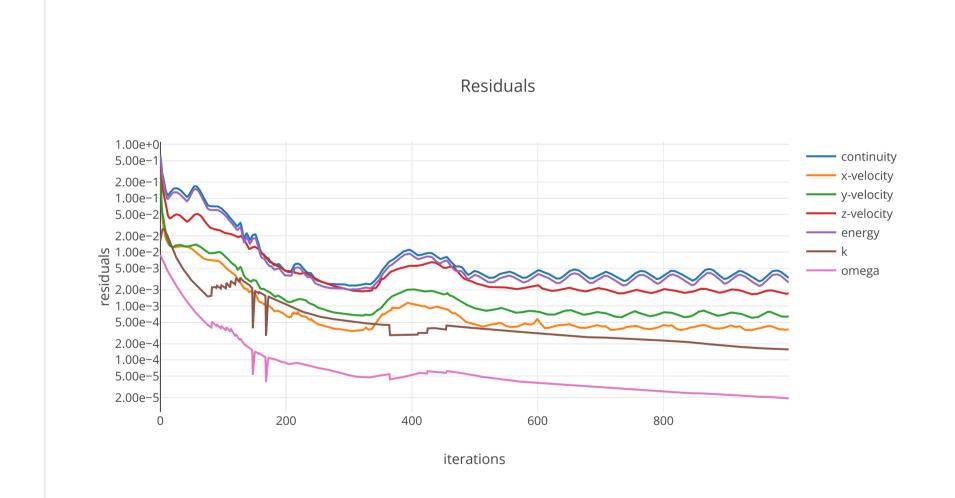


t_max-rplot

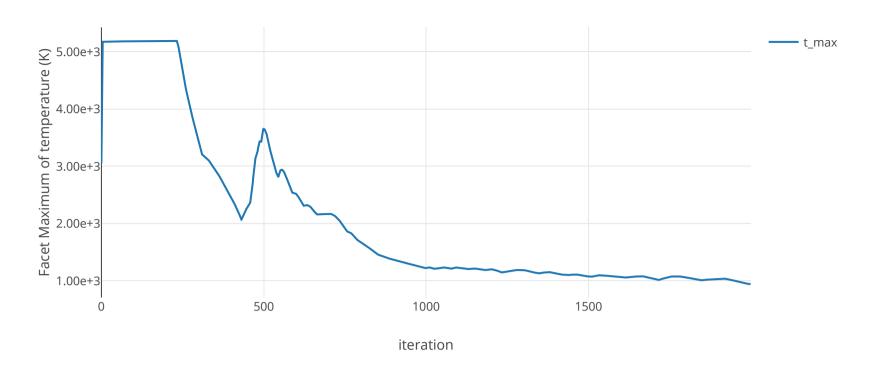


p_max-rplot

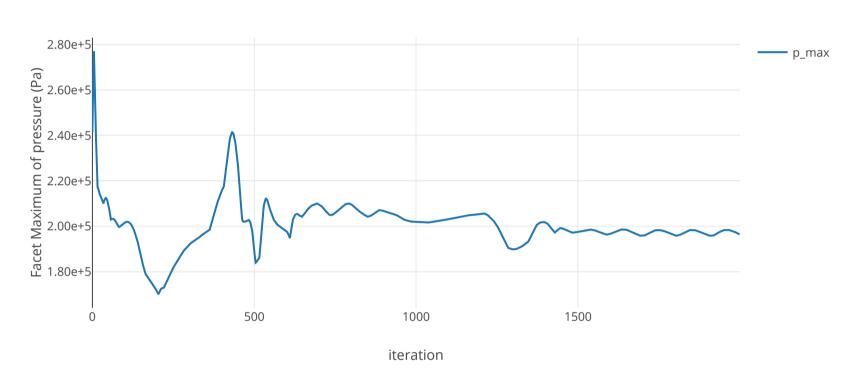

cm-rplot

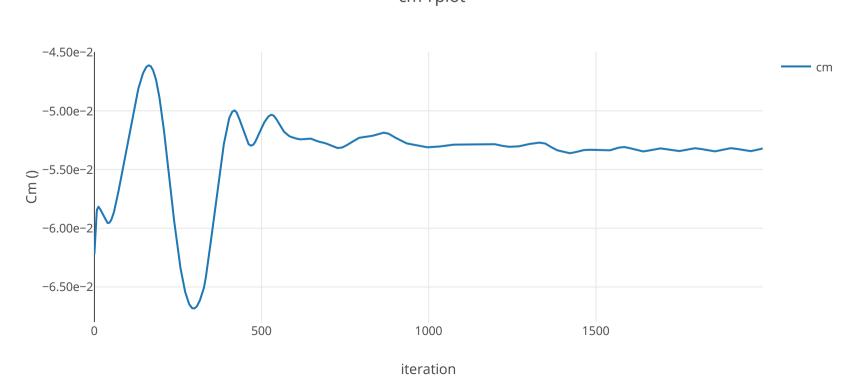


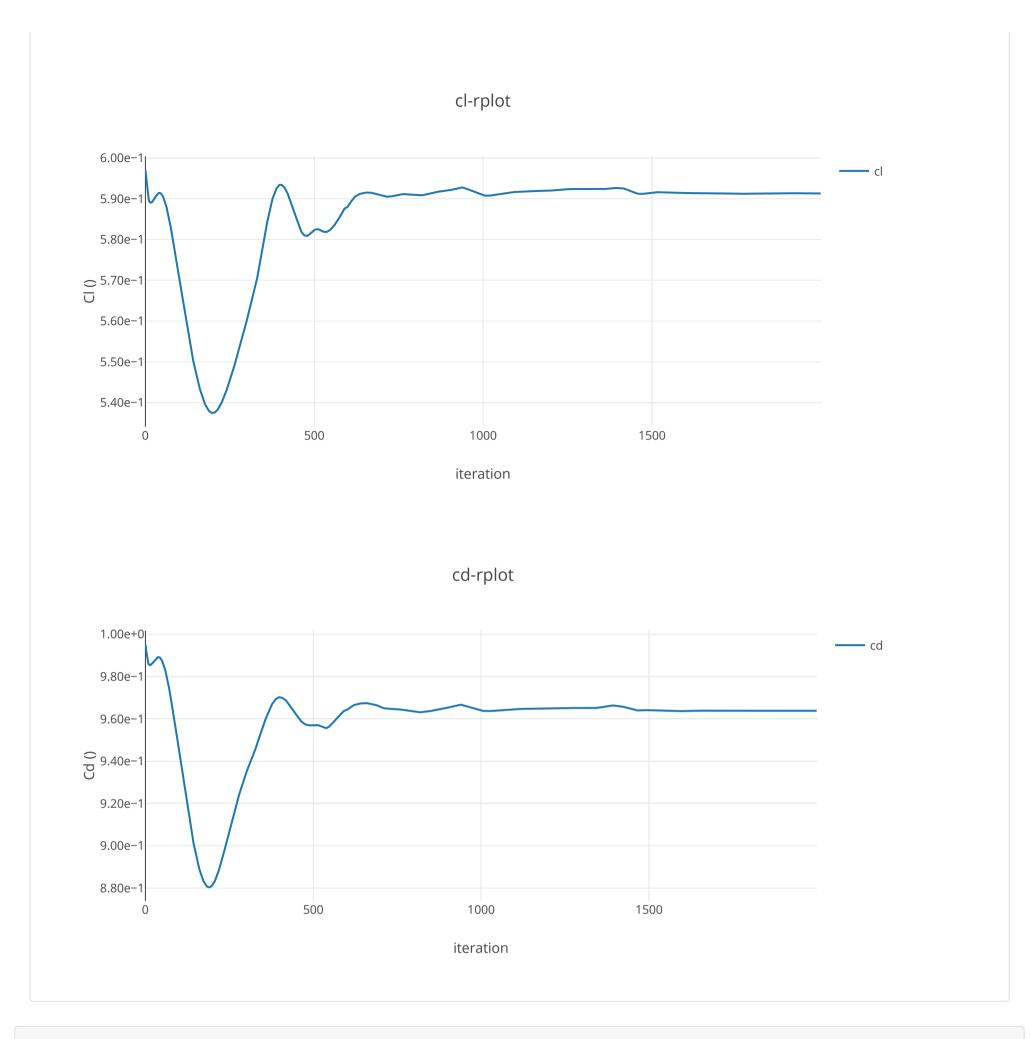








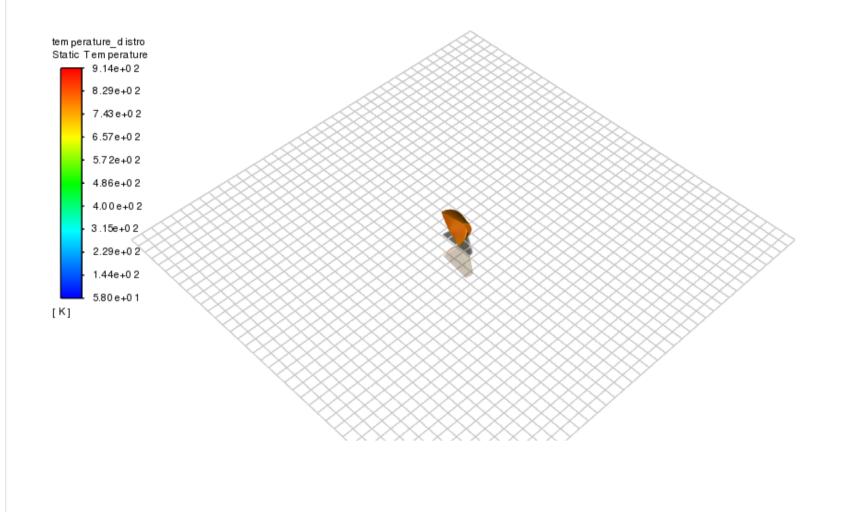




ANSYS 2021 RI ACADEMIC

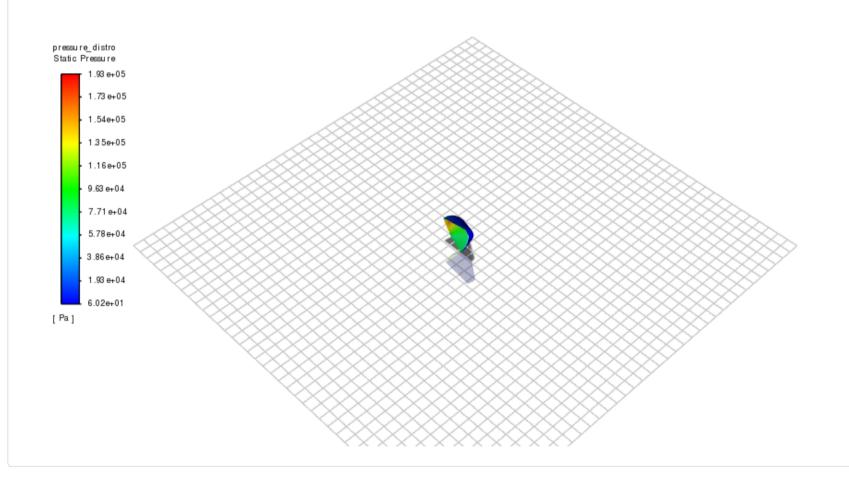



Pathlines

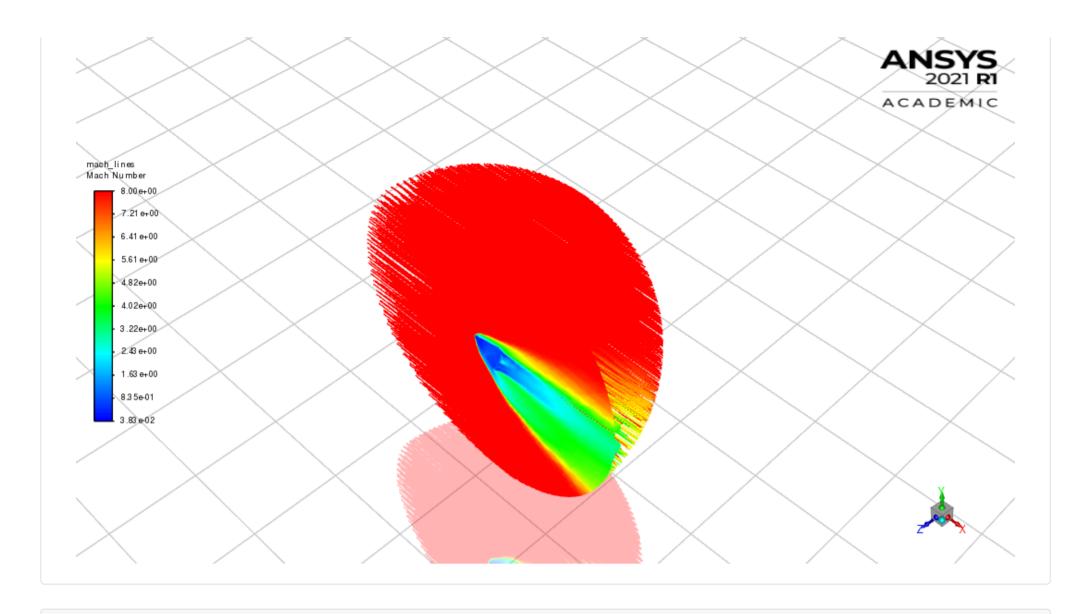

XY Plots

