


GENERAL NOTES UNLESS OTHERWISE NOTED:


1. REFERENCE 1U_Y.STEP FOR MODEL BASE DEF
2. REMOVE ALL BURRS AND SHARP EDGES R0.050 MM MAX
3. MATERIAL: ALUMINUM 6061-T6
4. ANODIZATION: TYPE II, BLACK
5. ALL RADII TO ± 0.5 MM UNLESS OTHERWISE SPECIFIED
6. OVERALL PROFILE TOLERANCE ⌓ | 0.1 | A | B | C | TO A MINIMUM GRID OF 5MM UNLESS OTHERWISE SPECIFIED
7. INTERNAL CORNERS RADIUS IS 0.2MM MAXIMUM
8. MACHINE ALL TEXT WITH 90 DEG V BIT WITH DEPTH OF 0.2MM BEFORE ANODIZATION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	INITIALS
	A	INITIAL RELEASE	7/15/2020	EG
	B	INCREASED CARD SLOT TOLERANCES	7/23/2020	EG
	C	CREATED ANODIZATION DRAWING	12/20/2020	EG
	D	UPDATED PER ASME Y14.5	9/26/2021	ML

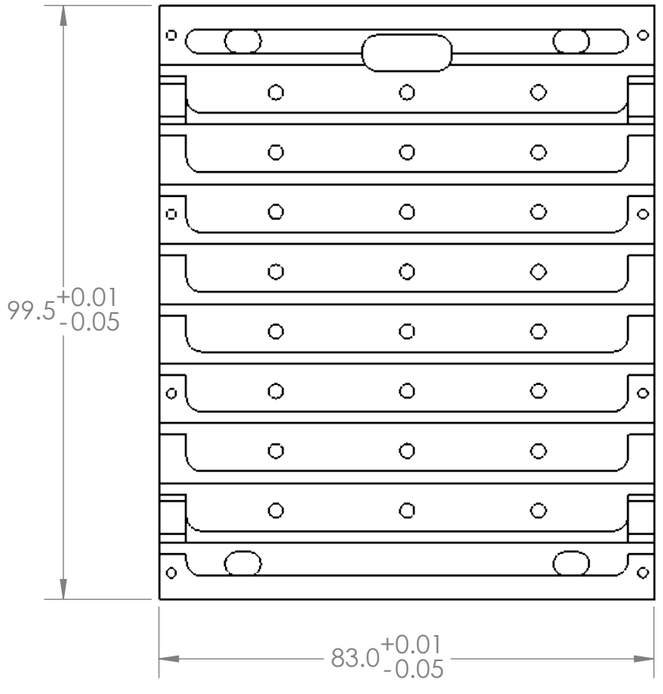

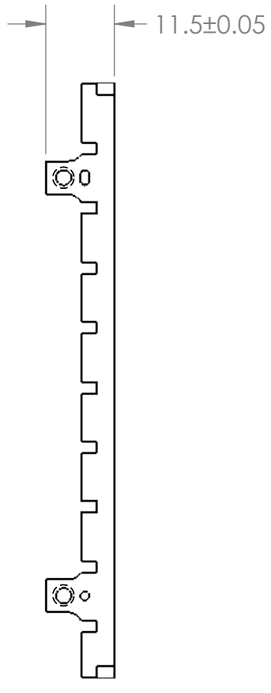

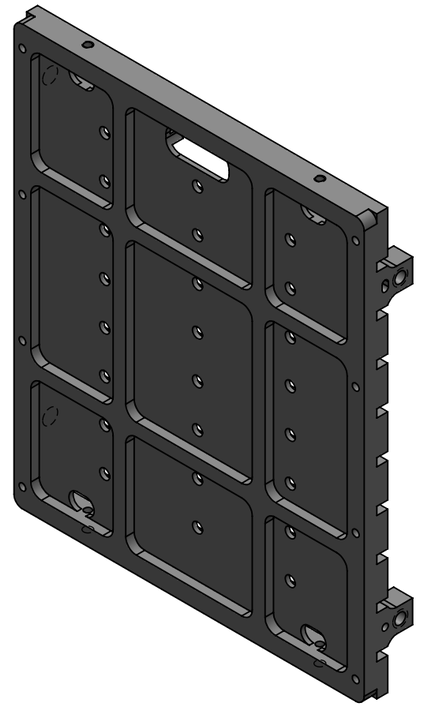

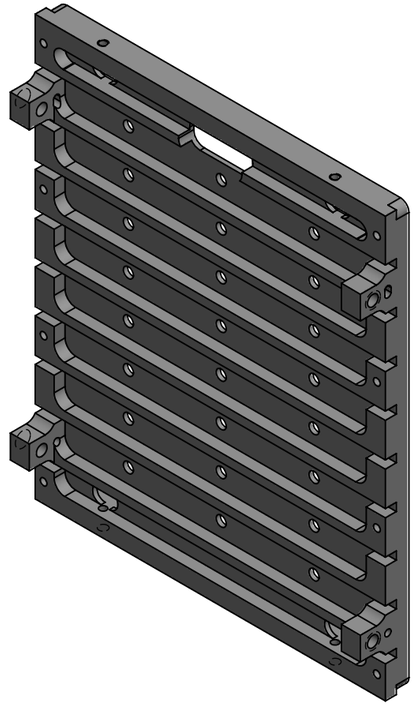

UNLESS OTHERWISE SPECIFIED	DRAWN BY	MARVIN LIN	9/26/2021			
DECIMAL .X ± 0.1 .XX ± 0.01 .XXX ± 0.005 ANGULAR .X ± 0.1 .XX ± 0.01	CHECKED	HAYDEN REINHOLD	9/26/2021			
SURFACE ROUGHNESS: INTERPRET PER ASME Y14.5-2009	ENG APPR.					
	MFG APPR.					
DO NOT SCALE DRAWING	Y 1U Frame			DWG. NO. 1U_Y		
MATERIAL (SEE NOTES) / FINISH (SEE NOTES) / WEIGHT (REF)	UNITS MM	REVISION D	FORMAT B	SCALE 1:1	PAGE 1/3	

SOLIDWORKS Educational Product. For Instructional Use Only.