

MCINARES.ORG

Marion County ARES Net Logger

User Manual for Net Control Operators

Covers version 0.17.0 • July 2026 • mcinares-net-logger.vercel.app

Weekly ARES Net • Skywarn Severe Weather Net • Siren Check Net

Contents

- | | |
|-------------------------------------|--|
| 1. What this app is | 8. Running a Skywarn Net |
| 2. Signing in and the top bar | 9. Running the Siren Check Net |
| 3. Core ideas to understand first | 10. Closing a net and the summary report |
| 4. The home page | 11. Siren tools |
| 5. The net page, common to all nets | 12. The roster |
| 6. Check-ins and the queue | 13. Practice runs and admin tools |
| 7. Running the Weekly ARES Net | 14. Quick answers to common situations |
| | 15. Log entry types reference |

1. What this app is


The Net Logger replaces the paper log for the three nets Marion County ARES runs: the Weekly ARES Net on Wednesday evenings, the Skywarn Severe Weather Net during activations, and the Siren Check Net on the first Friday of each month. It puts the script in front of you, logs check-ins and reports as you take them, and produces a finished summary report the moment you close the net.

Everything you log is saved to a shared database as you go. If your browser crashes, your laptop dies, or you switch to a different device mid net, you can reopen the net and pick up exactly where you left off. If a second person opens the same net on their own device, they see your entries appear live, and a Skywarn net can even be handed to them without stopping.

The screenshots in this manual were taken in Testing mode, which is why a yellow banner appears at the top of most of them. A real net looks identical without the banner.

2. Signing in and the top bar

Open the site and enter the club PIN. Ask the EC or a net manager if you do not have it. The session lasts 12 hours, so signing in before the net starts carries you through the whole evening.

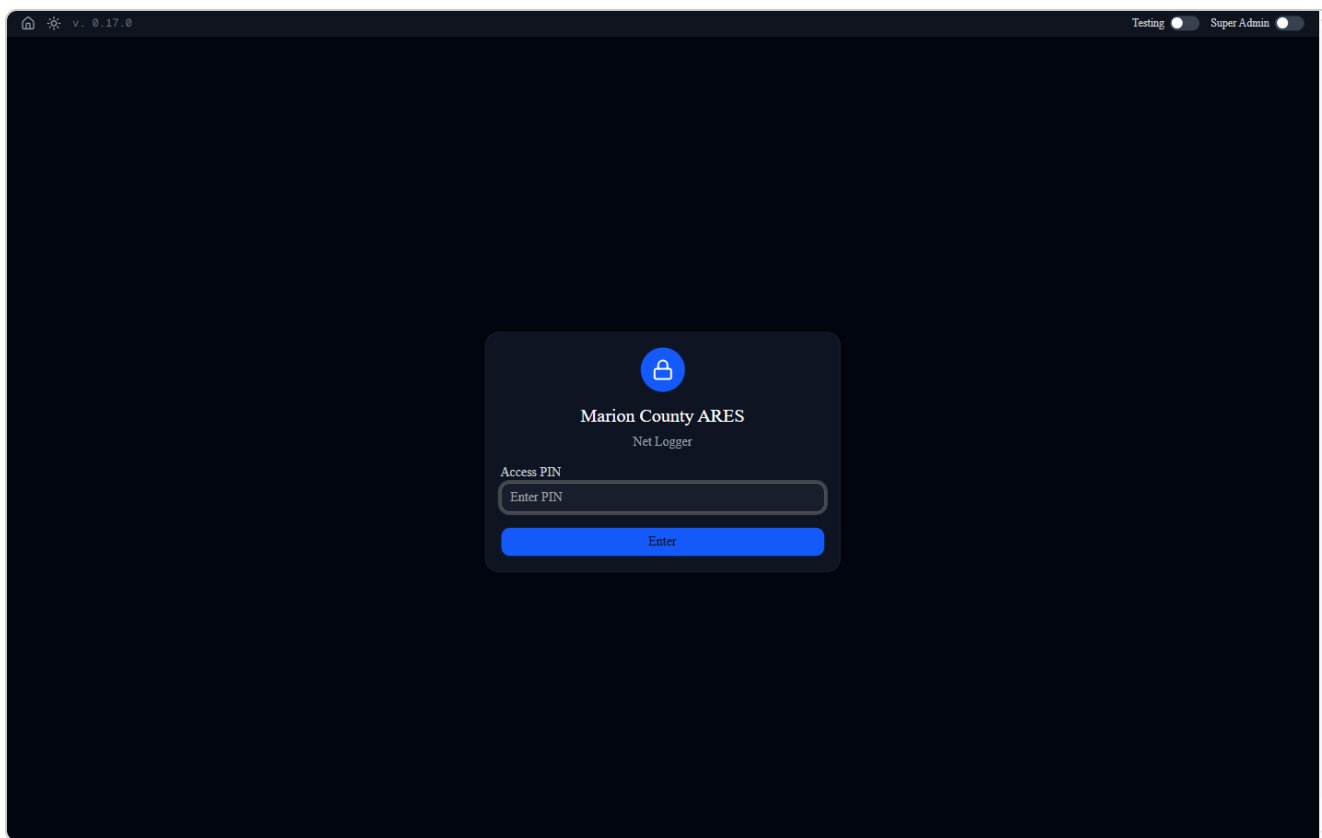

The PIN gate. One shared PIN for all operators.

The narrow bar at the very top of every page has, from left to right: a home button, a light and dark theme toggle, the app version, a Testing toggle, and a Super Admin toggle. Testing and Super Admin are described in section 13. You never need either one for a normal net.

3. Core ideas to understand first

The log is the record

Every action during a net writes a timestamped entry to the net log: the net opening, each check-in, each report, traffic, announcements, notes, and the close. The station list, the report page, and the statistics are all built from those log entries. That means fixing the log fixes everything. If a check-in went in with the wrong callsign, correcting that entry corrects the station list and the final report at the same time.


The roster remembers people

The roster is a permanent list of every callsign that has ever checked in, with names attached. When you start typing a callsign anywhere in the app, the roster fills in the rest and supplies the

operator's name. A callsign the roster has never seen gets a small NEW hint under the field, which is your cue to grab the operator's name over the air. New callsigns are added to the roster automatically when they check in, so the hint disappears on their next net.

Each device knows who is using it

The first time a device opens a net, the app asks "Who is operating this device?" Enter your callsign, or press Skip if you are only watching along. The answer is remembered on that device and shows in the net header as You: N9MAN. On Skywarn nets this is what makes net control handoff work, because the app can tell whether your device is running the net or watching it.

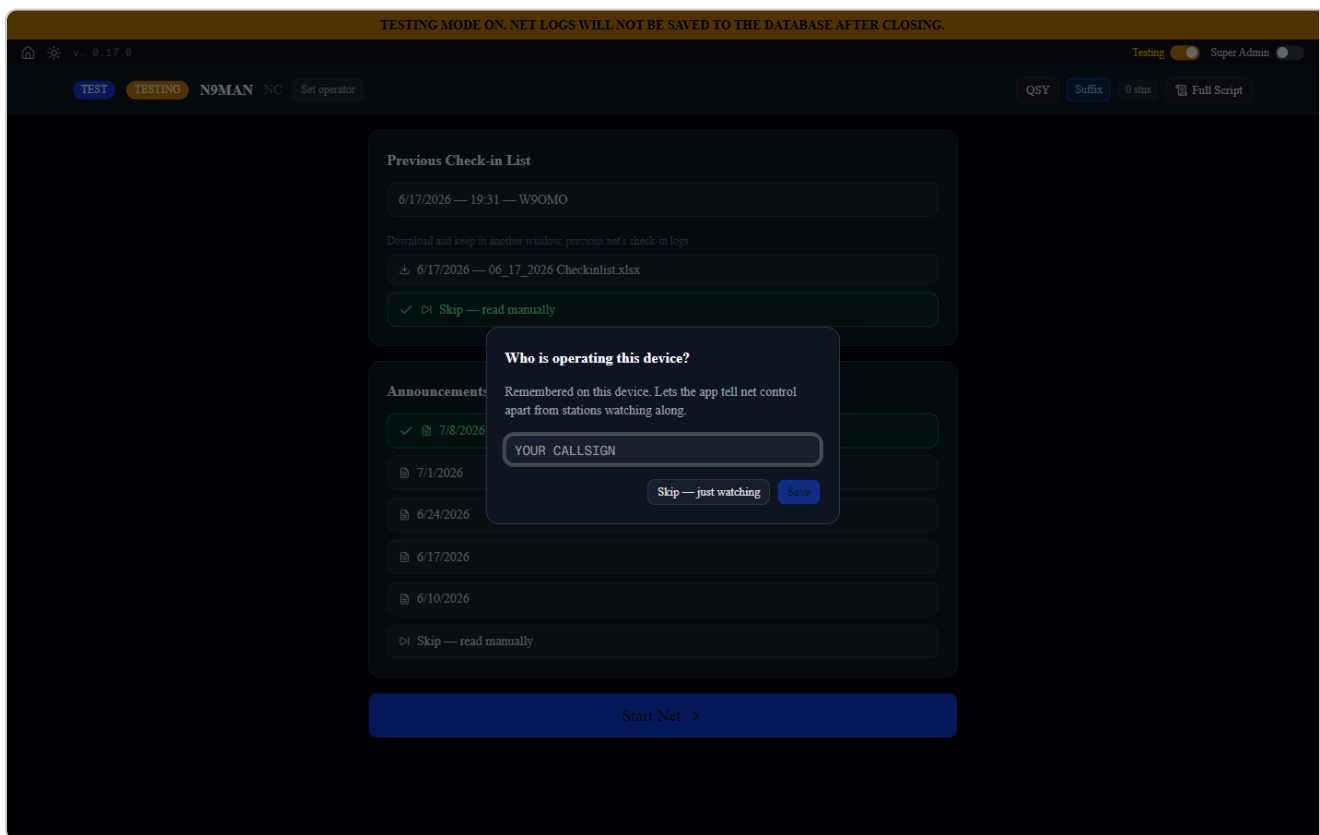

The one time per device identity prompt, shown here over the ARES setup screen.


Everything syncs live

Any number of devices can have the same net open. Check-ins, reports, and log edits made on one device appear on all the others within a second or two. There is nothing to configure. A backup operator with a tablet can watch the station list build in real time while net control types.

Failed saves tell you

If a save does not reach the server, a red message pops up at the top of the screen naming the failed action. If you see one during a net, check the Recent Log to confirm whether the entry landed before moving on. Silence means everything saved.

4. The home page

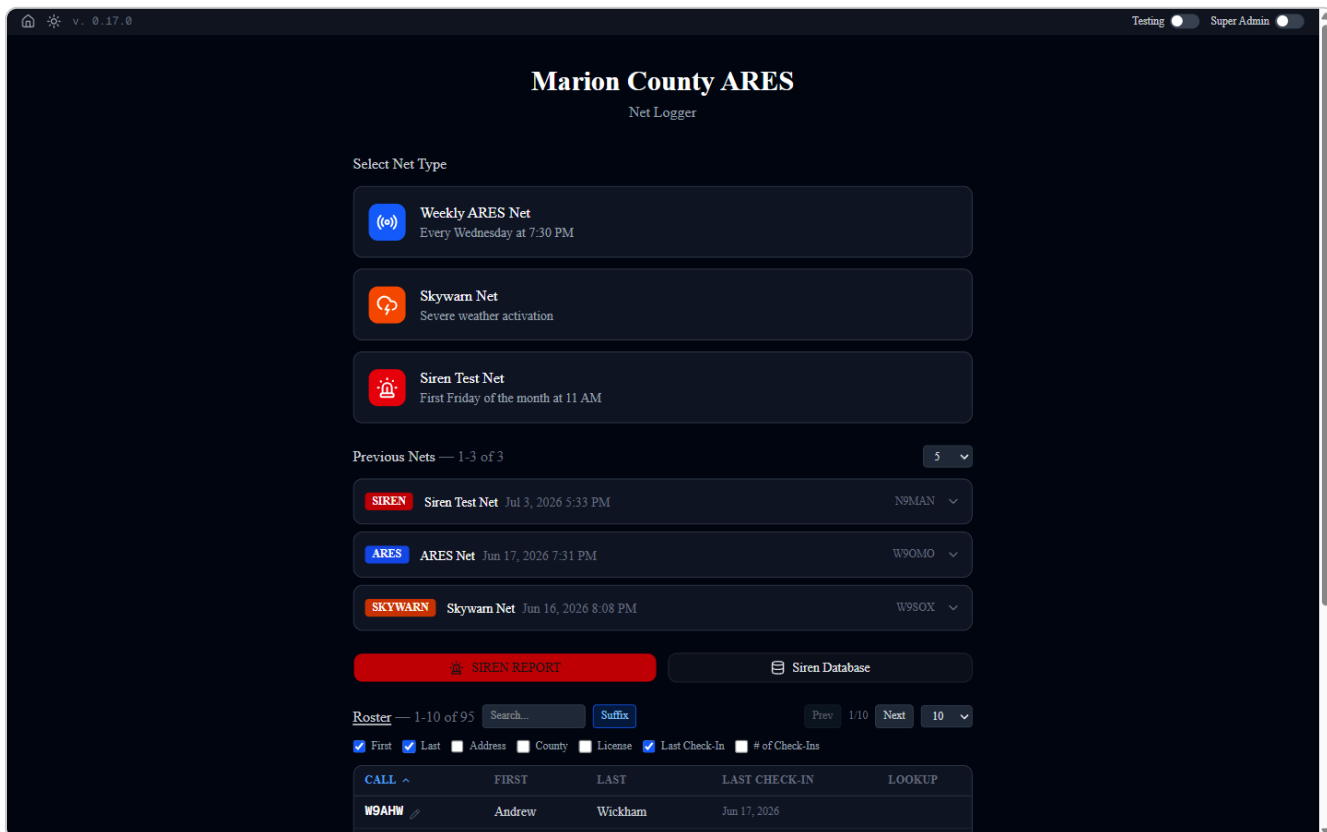

The home page: net types at the top, then previous nets, siren tools, and the roster.

To start a net, pick the net type, enter your callsign as net controller, and press Open Net. The callsign field autocompletes from the roster.

If a net of the same type is already open, an amber warning appears with a link to resume it instead. You can still open a second one if you truly need to, but two live nets of the same type is almost never what anyone wants.


An open net always shows at the top of the home page as a large RESUME banner with the net controller and start time. Closing your laptop mid net loses nothing: come back to the home page and tap the banner.

Previous Nets lists every closed net, newest first. Tap one to expand its log, or open its report page. Nets can only be deleted in Super Admin mode.

Siren Report and **Siren Database** open the county wide siren tools described in section 11. The **Roster** table at the bottom is described in section 12.

5. The net page, common to all nets

All three nets share the same working screen. The pieces:

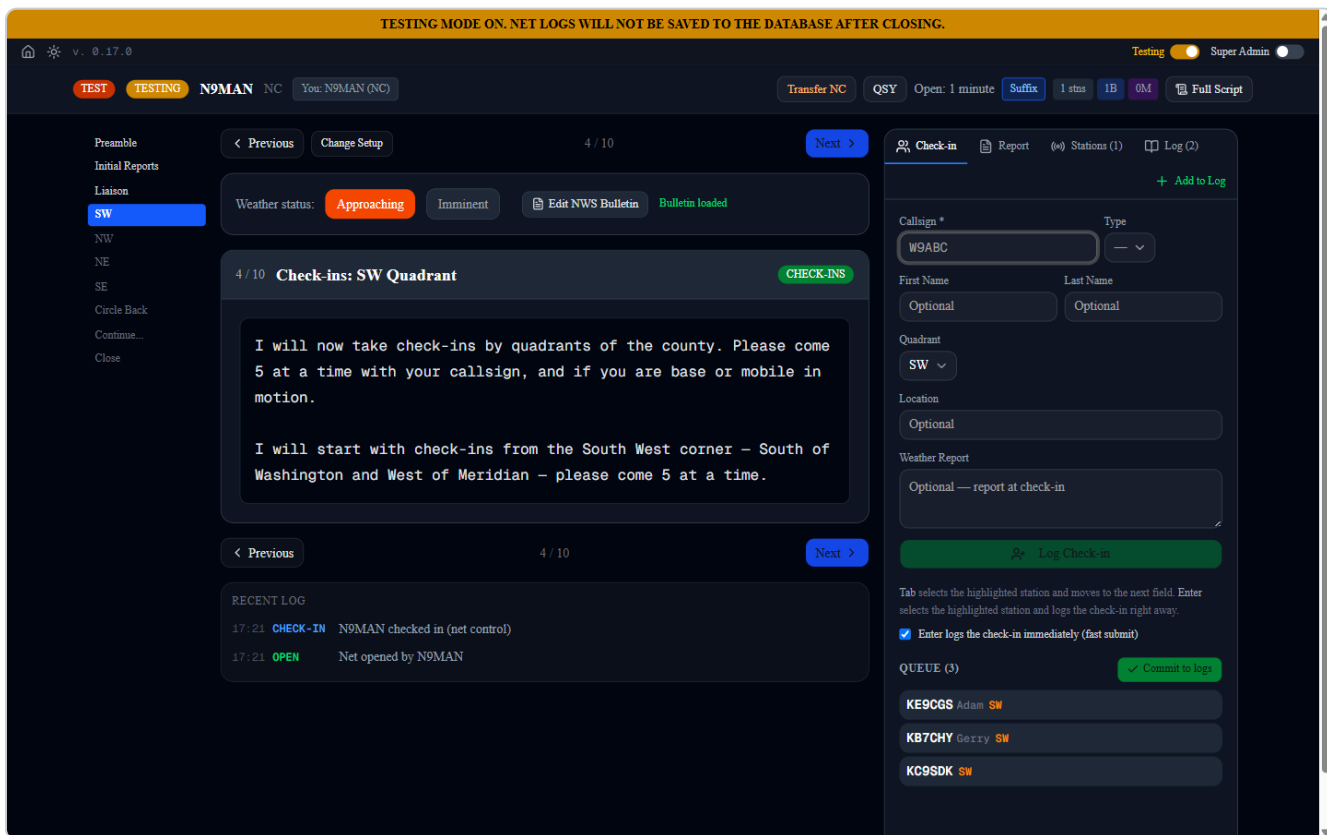

A Skywarn net mid check-ins. Header at the top, section rail on the left, script in the center, tabs panel on the right.

The header

Left side: the net type badge, the current net controller's callsign, and the You: badge showing who this device is operating as. Tap the You: badge any time to change it.

Right side: a QSY button for logging a frequency move, the elapsed time since the net opened, the Suffix toggle (sorts callsign lists by suffix letter instead of prefix), station counters (total, base, mobile, and reports once any exist), and Full Script, which opens the entire script in one scrollable window for reading straight through.

On Skywarn nets the header also carries the net control handoff button, described in section 8.

The section rail and script card


The left rail lists every section of the net in order. The current section is highlighted, and you can jump anywhere by clicking. Previous and Next buttons above and below the script do the same thing one step at a time. The script card shows the words to read, with your callsign and other live values already filled in. A colored tag on the card tells you what kind of section it is: READ ALOUD, CHECK-INS, INPUT NEEDED, REPORTS, or CLOSING.

The tabs panel

The right panel has up to five tabs. Check-in and Report appear when the current section allows them. Stations lists everyone checked in, with an edit pencil on each. Traffic/Ann. appears on ARES nets. Log shows the most recent entries with a View Full Log button. The panel switches tabs automatically to match the section you are on, but if you pick a tab yourself the app respects your choice instead of yanking it away at the next section.


Add to Log and editing entries

The green Add to Log button on the tab bar logs anything the structured forms do not cover: a note, a question, a comment, or a manual entry of any type, with an optional station attached.

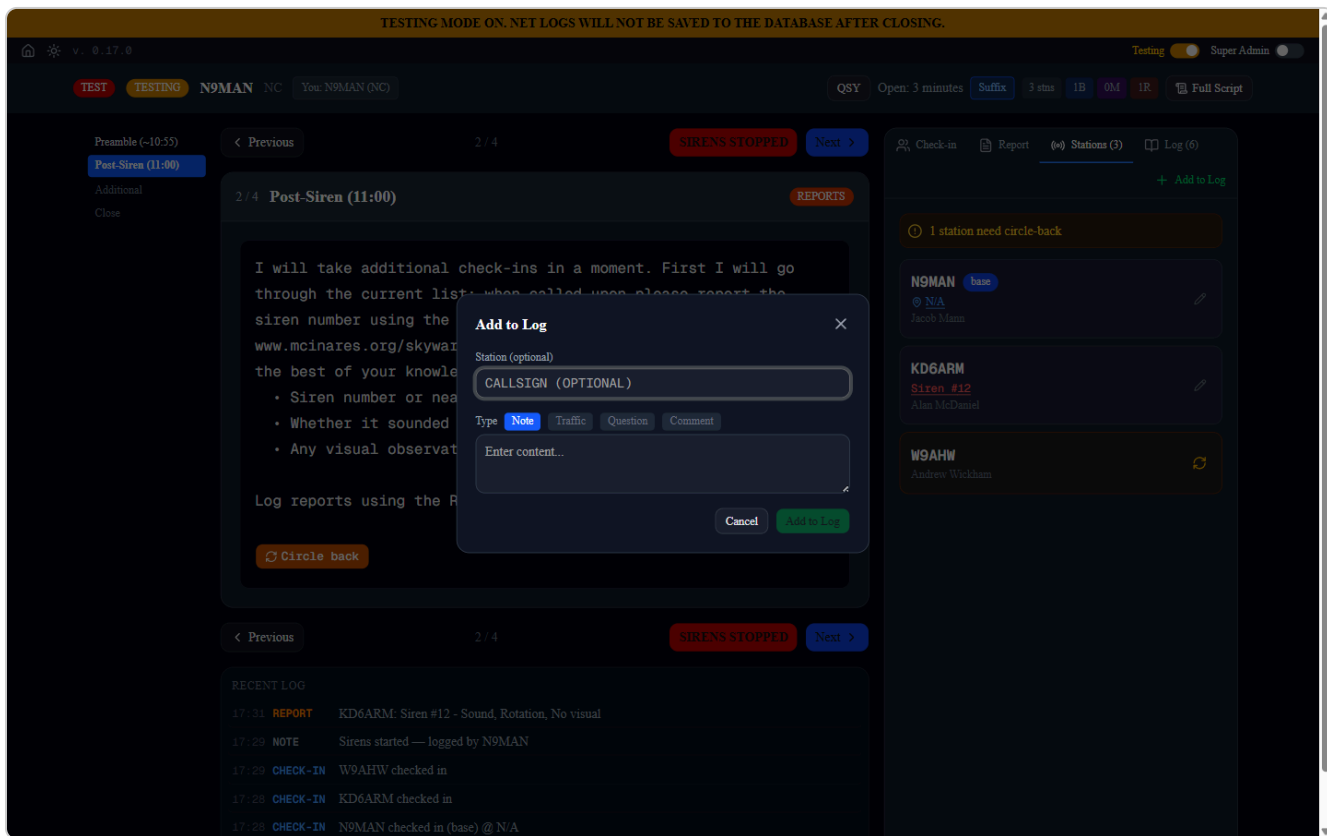

Add to Log covers anything that happens on the air that the forms do not.

Clicking any entry in the Recent Log or Log tab opens the editor, where you can fix the text, the timestamp, the entry type, or delete the entry. Timestamp edits accept 24 hour time and reorder the log instantly.

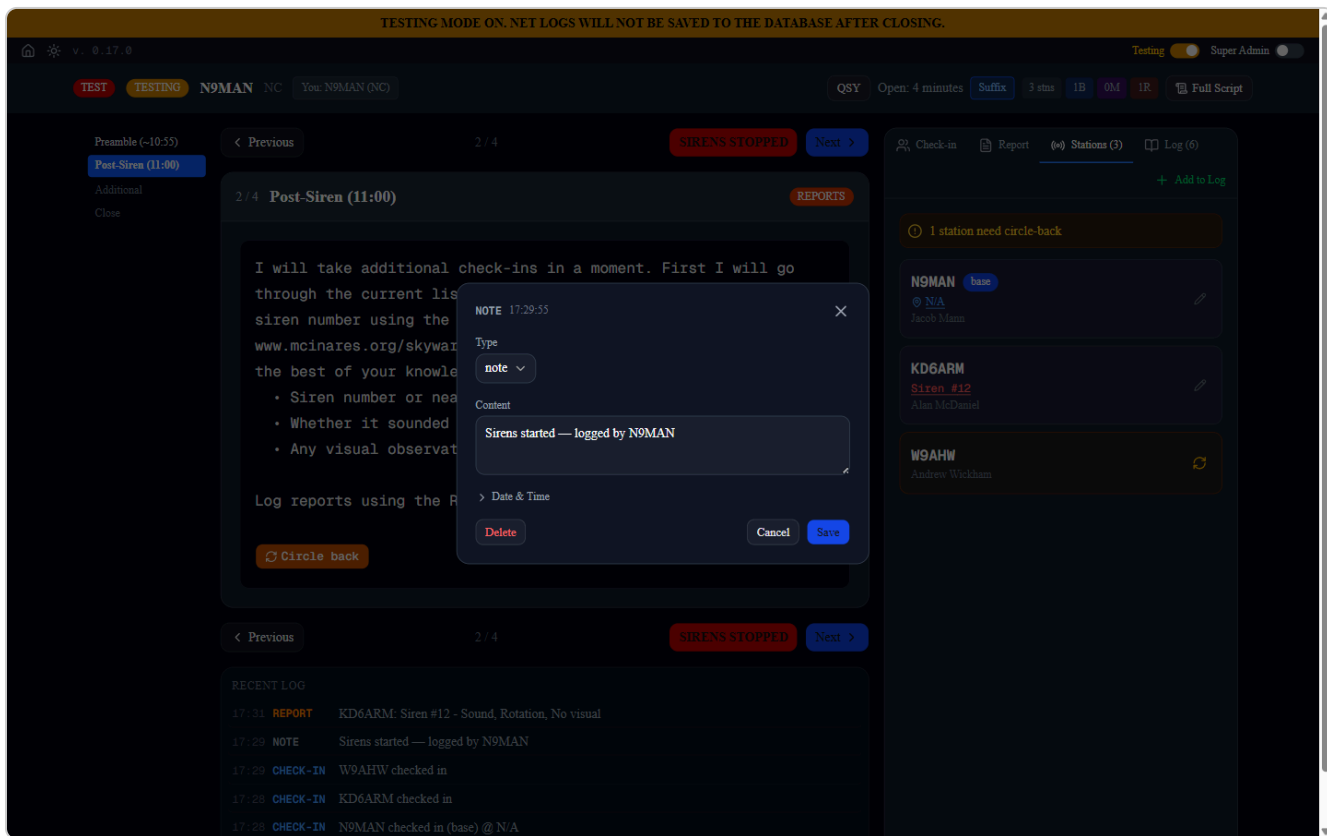

Any log entry can be corrected after the fact. The record stays clean.

EXAMPLE

A station gives a report at 19:42 but you do not get it typed until 19:47. Log it when you can, then click the entry and set the timestamp back to 19:42. The log and the report page now show the report at the time it actually happened.


6. Check-ins and the queue

The check-in form is built for speed. Type a callsign, and the roster suggests matches with names. Tab selects the highlighted suggestion and moves on to the next field. Enter selects the suggestion and logs the check-in immediately, thanks to the fast submit option that is on by default. When five stations come back to back, you can log all five with nothing but callsigns and the Enter key.

If you type a callsign that is already checked in, the form stops and warns you instead of double logging. You can cancel, or force a manual duplicate entry when the situation really calls for it.

The queue

During rapid fire check-in sections the form feeds a queue instead of writing straight to the log. Each Enter drops a callsign into the QUEUE list below the form. Details can wait: click any queued item to open an editor and fill in the name, location, base or mobile, quadrant, or siren numbers while the net breathes. When the batch is complete, press Commit to logs and every queued check-in is written with the timestamp of the moment you queued it, so the log reflects when stations actually called, not when you finished typing.

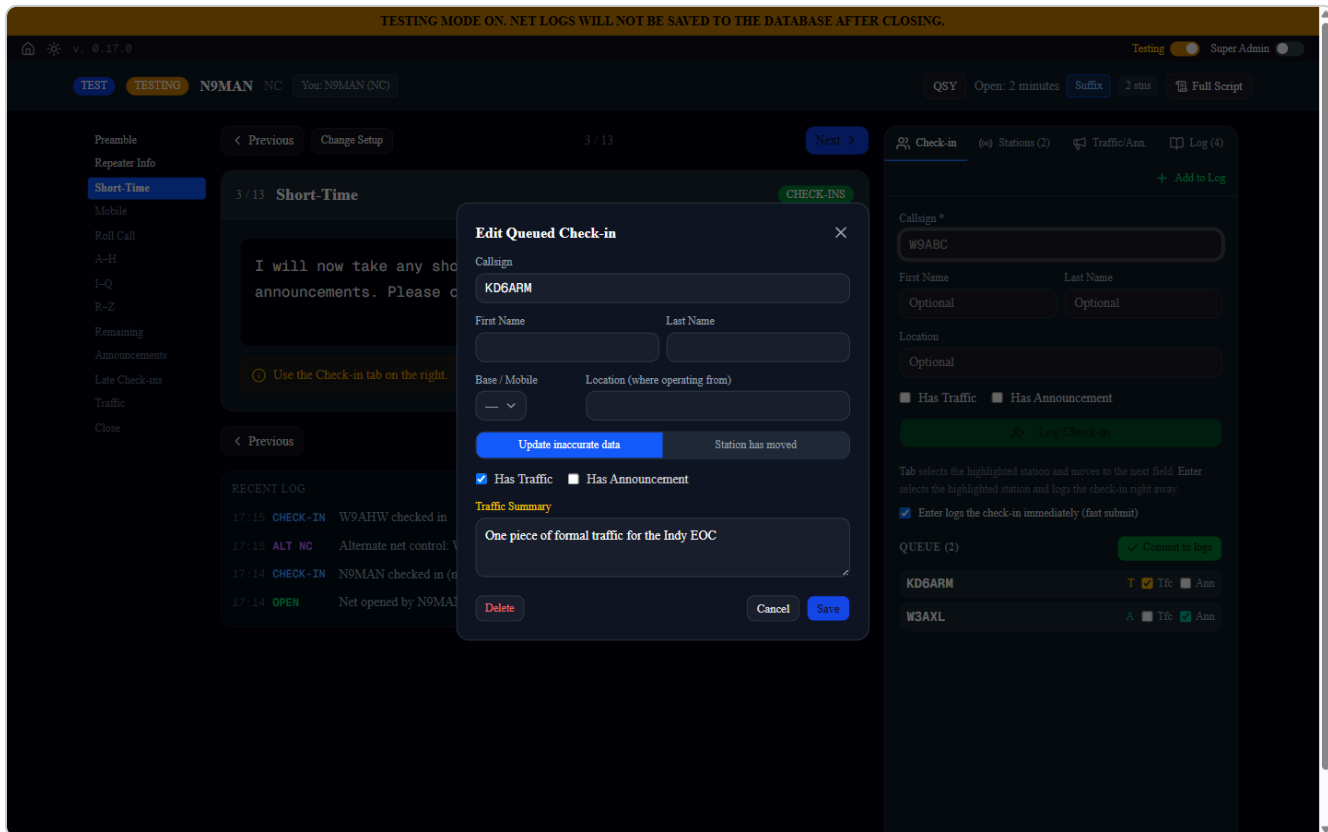

Click a queued check-in to fill in details before committing. The choice at the bottom controls whether an edit counts as fixing bad data or as the station moving.

The queue is saved on the server, so a refresh or a device swap does not lose it. Sections that use the queue: all ARES check-in sections including late check-ins, the four Skywarn quadrant sections, and the Siren net preamble.


EXAMPLE

Skywarn SW quadrant, five stations call at once. You type five callsigns, Enter after each, ten seconds total. You read the callsigns back on the air. Nobody corrects you, so you press Commit to logs. Two of them gave locations, so before committing you click those two, type the locations, and save. The quadrant is already set on each because the SW section filled it in automatically.

7. Running the Weekly ARES Net

The Wednesday net runs thirteen sections: Preamble, Repeater Info, Short-Time, Mobile, Roll Call, three alphabet check-in blocks and Remaining, Announcements, Late Check-ins, Traffic, and Closing.


Setup

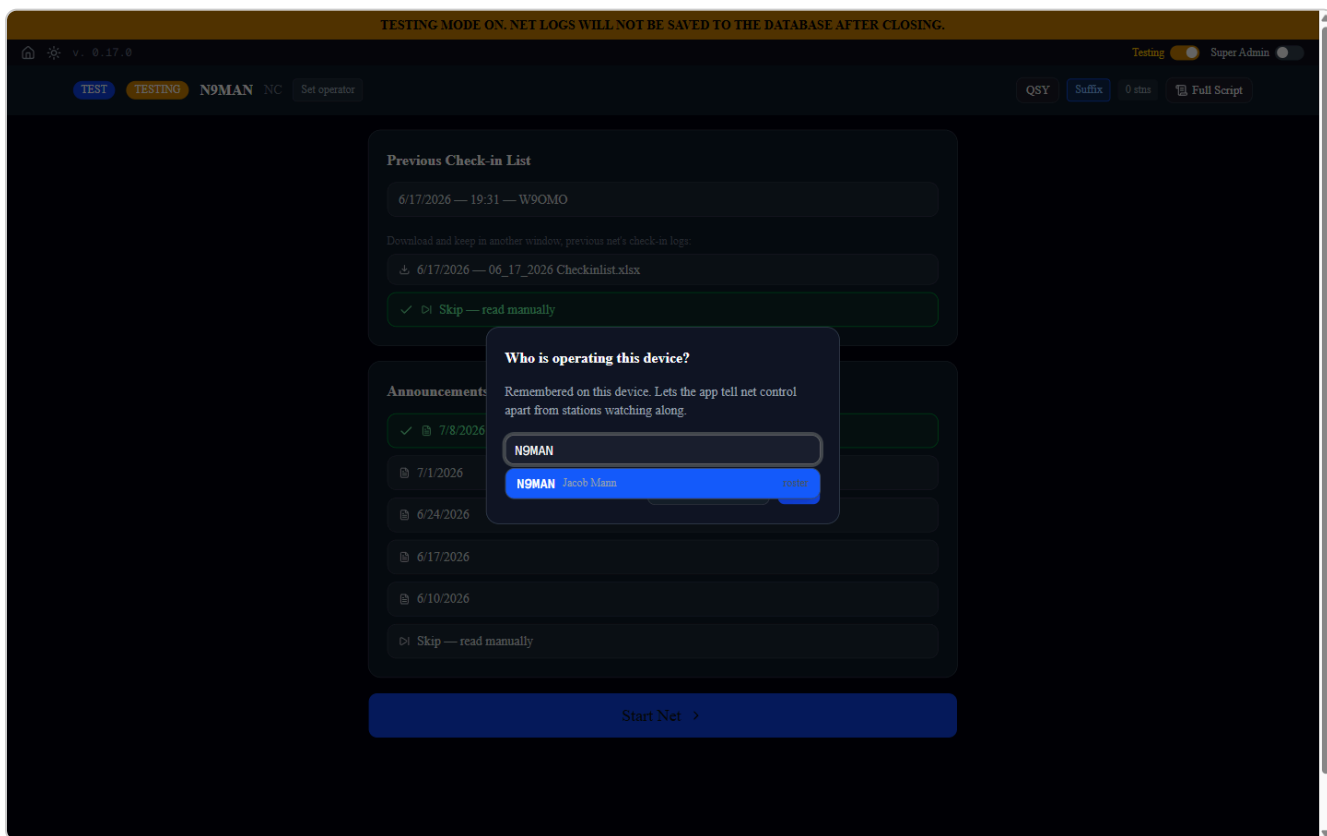

ARES setup: pick last week's check-in list and this week's announcements PDF.

Before the script starts, the setup screen asks two questions. First, which previous net's check-in list to use for roll call. The most recent Wednesday net is detected automatically when there is one, and downloadable check-in spreadsheets from mcinares.org are offered as a fallback. Second, which announcements PDF to display during the announcements section. The current week's file is preselected when it exists. Both choices are saved with the net, so a refresh keeps them, and both can be changed later with the Change Setup button next to the Previous button.

Preamble

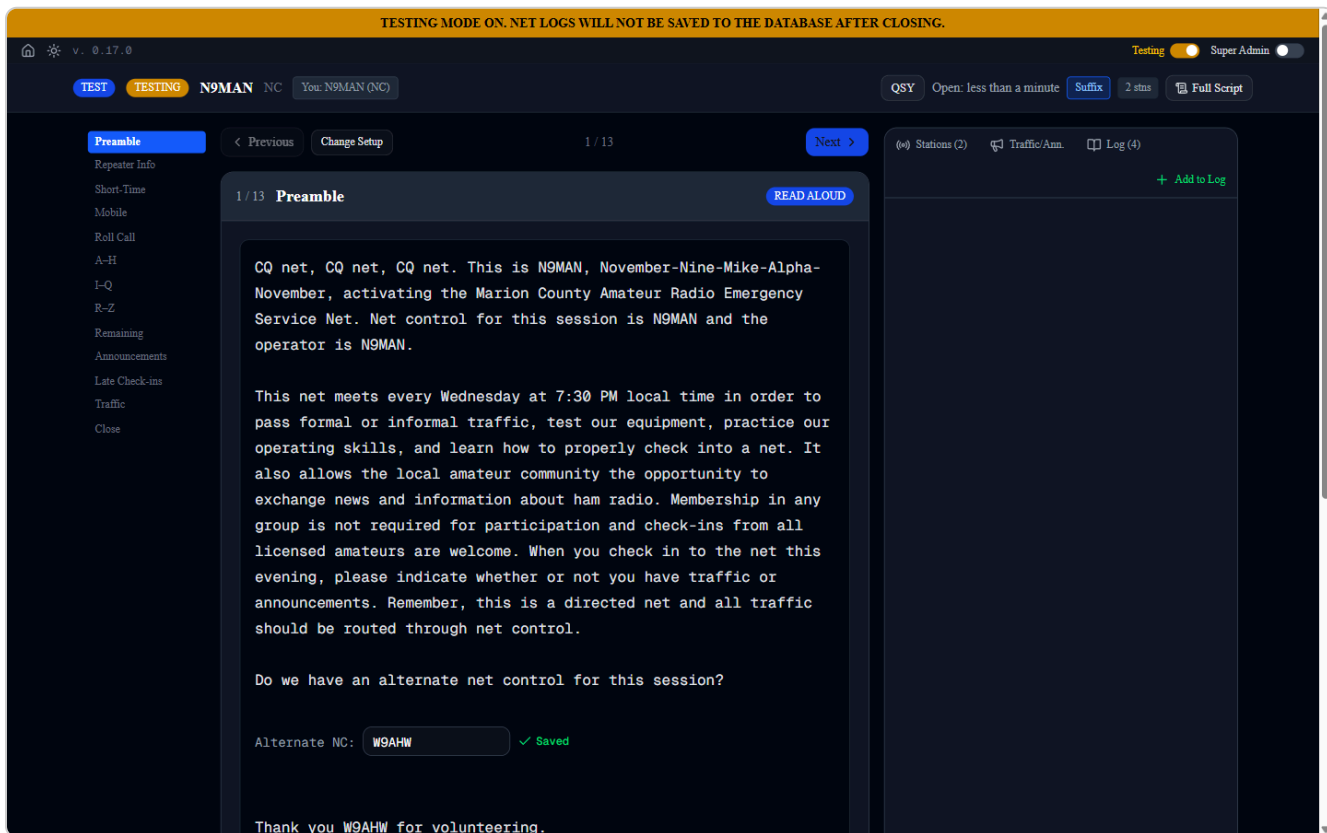

The preamble with its inline inputs. Alt NC W9AHW is saved, shown by the green check.

The preamble script contains three inline inputs: Alternate NC, NTS Liaison, and OES Station. Type the callsign and press Save (or Enter). The value is logged, the volunteer is automatically checked in, and a green Saved check replaces the button. The values survive a refresh, and saving a corrected callsign updates the original entry instead of logging a duplicate.

Short-Time and Mobile

TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING.

Testing Super Admin

TEST TESTING N9MAN NC You: N9MAN (NC) QSY Open: 2 minutes Suffix 2 stns Full Script

3 / 13 Short-Time CHECK-INS

I will now take any short-time check-ins that have traffic or announcements. Please call net control.

Use the Check-in tab on the right.

RECENT LOG

- 17:15 CHECK-IN W9AHW checked in
- 17:15 ALT NC Alternate net control: W9AHW
- 17:14 CHECK-IN N9MAN checked in (net control)
- 17:14 OPEN Net opened by N9MAN

Check-in Stations (2) Traffic/Ann Log (4) Add to Log

Callsign * W9ABC

First Name Optional Last Name Optional

Location Optional

☐ Has Traffic ☐ Has Announcement

Log Check-in

Tab selects the highlighted station and moves to the next field. Enter selects the highlighted station and logs the check-in right away.

☒ Enter logs the check-in immediately (fast submit)

QUEUE (2) Commit to logs

KD6ARM	T	Tfc	Ann
W3AXL	A	Tfc	Ann

Short-Time check-ins. Traffic and announcement summaries are typed at check-in time, while the station is explaining them.

Short-time stations state their traffic or announcements up front, so this section's check-in form includes Has Traffic and Has Announcement checkboxes with summary boxes. Type the summary while the station talks. When the queue commits, the traffic and announcement entries are logged alongside the check-in with matching timestamps, and the station is flagged so the Announcements and Traffic sections will call on them later.

Roll Call

With a previous net selected in setup, roll call presents last week's stations as a checklist sorted by suffix. Tick In as each station answers, and tick Tfc or Ann if they declare traffic or announcements. Each tick logs a real check-in stamped at the moment you ticked it. A counter compares last week's total to tonight's confirmations as you go.

Alphabet check-ins

A–H, I–Q, R–Z, and Remaining all use the queue. This is the fastest part of the net, and the fast submit workflow from section 6 is built for it.

Announcements

TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING.

TEST TESTING N9MAN NC You: N9MAN (NC) QSY Open: 3 minutes Suffix 4 stns Full Script

10 / 13

Previous Change Setup Next

Preamble
Repeater Info
Short-Time
Mobile
Roll Call
A-H
I-Q
R-Z
Remaining
Announcements
Late Check-ins
Traffic
Close

This is N9MAN for the Marion County ARES Net.

I will now take announcements from stations that indicated that they had announcements. Stations with traffic will pass after announcements.

STATIONS WITH ANNOUNCEMENTS (1)

Enter a summary for each station (or leave as N/A) and click Log Announcement, or it will not appear in the net logs.

✓ W3AKL logged

I will now read this week's Marion County Ham Radio Announcements.

Log Start of Reading Announcements

Zoom in Open in new tab

Marion County ARES Announcements July 8, 2026
Wednesday 7:30PM 146.700 repeater

FOR A COPY OF THE ANNOUNCEMENTS READ ON THIS NET, GO TO
WWW.MCINARES.ORG and click PUBLIC SERVICE on the main page

Holding the ARES net on the 146.700 repeater is made possible through the courtesy of the Indianapolis Repeater Association.

Check-in Stations (4) Traffic/Ann. Log (\$)

+ Add to Log

Callsign *
W9ABC

First Name Last Name
Optional Optional

Location
Optional

☐ Has Traffic ☐ Has Announcement

Log Check-in

Tab selects the highlighted station and moves to the next field. Enter selects the highlighted station and logs the check-in right away.

☒ Enter logs the check-in immediately (fast submit)

Announcements: stations that flagged announcements get a card each, and the weekly PDF displays inline.


Every station that checked in with an announcement gets a card. Take their announcement, type a one line summary (or leave N/A), and press Log Announcement. The card turns green and stays green, including for anyone watching on another device. Pressing No announcement crosses the station out, with an Undo if you clicked the wrong one. A station flagged late in the net appears in this list automatically, and half typed summaries survive if you step to another section and come back.

Below the station cards, the Log Start of Reading Announcements button drops a timestamped entry when you begin reading the weekly bulletin, and the selected PDF displays inline with zoom and open in new tab options.

Late Check-ins

Works exactly like the other check-in sections, including the queue. Entries here are logged as LATE CHECK-IN so the final report distinguishes them.

Traffic

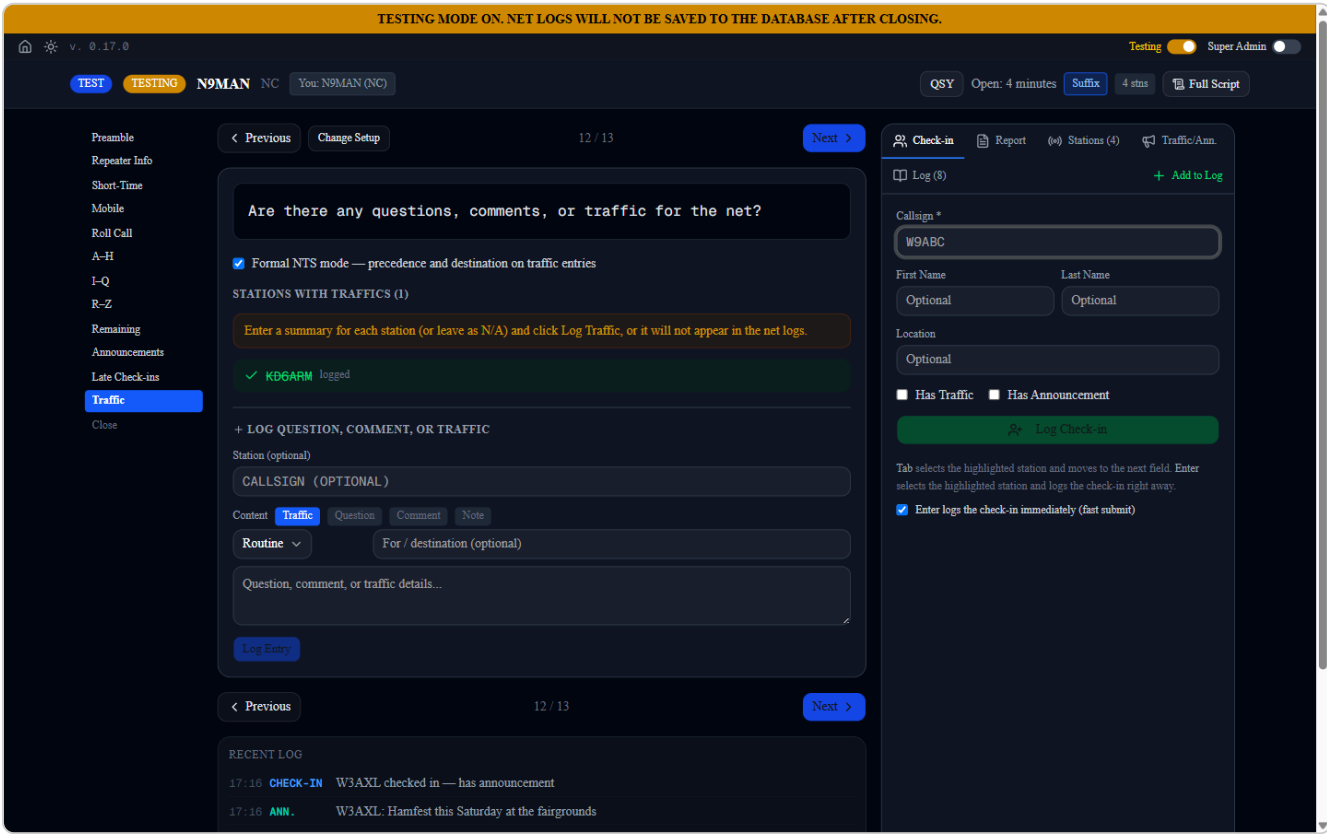

The traffic section with Formal NTS mode switched on, adding precedence and destination to each entry.


Stations that declared traffic each get a card, same pattern as announcements. Below them, a free form logger records questions, comments, or traffic from anyone, with the type selectable.

The net runs informal by default. Ticking Formal NTS mode adds a precedence dropdown (Routine, Welfare, Priority, Emergency) and a destination field to every traffic entry, and the precedence is stored with the log entry. The toggle sticks for the rest of the net.

EXAMPLE

KD6ARM checked in during Short-Time with one piece of formal traffic for the Indy EOC. In the Traffic section his card is already waiting with the summary you typed at check-in. Flip on Formal NTS mode, set precedence Priority, destination Indy EOC, and log it. The log reads: KD6ARM: [PRIORITY] for Indy EOC, followed by the summary.

Closing

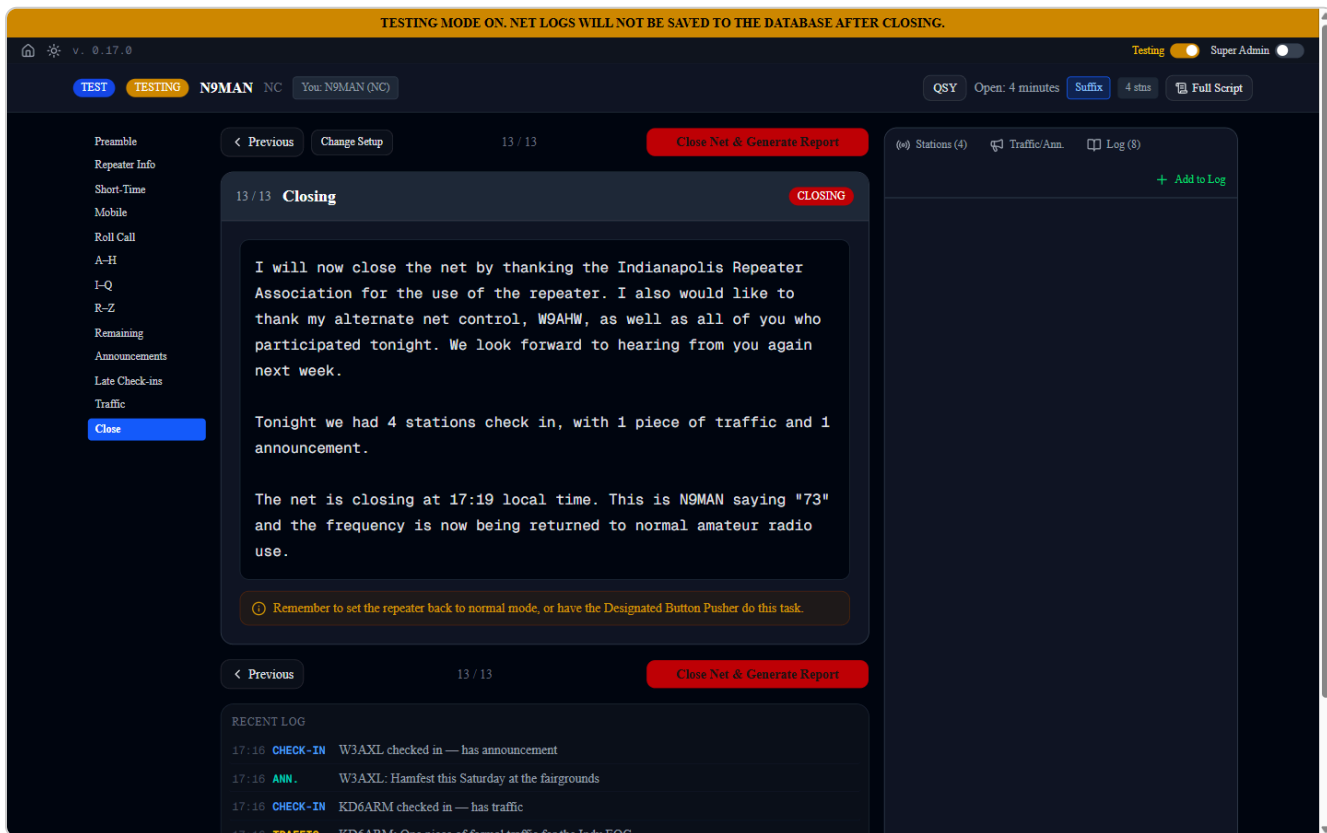

The closing script fills in tonight's totals and the current time by itself.

The closing script thanks the alternate NC and liaison by callsign when they were logged, and reads out tonight's real numbers: stations checked in, pieces of traffic, and announcements, plus the current clock time. Nothing to count, nothing to fill in. Press Close Net & Generate Report when you are done reading.

8. Running a Skywarn Net

Skywarn nets are the longest and most chaotic, and the app is built around that: everything important survives a refresh, a dead battery, or a change of operator.

Setup

The screenshot shows the Skywarn app interface during setup. At the top, a yellow banner reads "TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING." Below this is a dark blue header with navigation icons, version "v. 0.17.0", and a "Testing" toggle. The main content area has three sections: "Weather Status" with buttons for "Approaching", "Imminent", and "Clear"; "Your Quadrant" with four buttons for different directions (SW, NW, NE, SE); and "NWS Bulletin" with a text input field containing a sample warning and a "Go to the 443.250 Repeater to link with 146.760 via DTMF Codes" button. A "Start Net" button is at the bottom.

Skywarn setup: weather status, your quadrant, and the NWS bulletin.

Three questions before the script starts. Weather status (Approaching or Imminent) feeds the preamble wording. Your Quadrant places you, the net controller, in the right quadrant group on the station list. The NWS Bulletin box takes a paste of the current watch or warning text from weather.gov/ind/hazards, and whatever you paste is read into the preamble, the continuity script, and the closing automatically. All three are saved with the net itself, so they survive refreshes and show identically on every device.

The weather bar

On every section of a Skywarn net, a bar above the script shows the weather status buttons and the bulletin editor. When NWS upgrades a watch to a warning mid net, click Edit NWS Bulletin right where you are, paste the new text, and every script that references the bulletin updates immediately.

Initial Reports and Liaison

The net opens by taking urgent reports only, with the Report tab ready. Then the liaison section asks for a volunteer to monitor the Central Indiana Skywarn net. Saving the liaison callsign logs it and checks the volunteer in, with the same green Saved check as the ARES preamble.

Quadrant check-ins

SW, NW, NE, SE, in that order, each using the queue with the quadrant pre-filled. Stations report base or mobile at check-in, and the Type dropdown sits next to the callsign field for it. Location and a full weather report can also be taken at check-in when a station volunteers one.

Weather reports

The screenshot displays the Skywarn net interface in testing mode. At the top, a yellow banner reads "TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING." Below this, the interface is divided into several sections. On the left, a sidebar contains navigation links: Preamble, Initial Reports, Liaison, SW, NW, NE, SE, Circle Back (highlighted), Continue..., and Close. The main area is titled "8 / 10" and features a "Weather status" section with buttons for "Approaching" (selected), "Imminent", and "Edit NWS Bulletin". A message states "There are 3 stations with incomplete information." Below this, a "Circle Back" section contains a text box with instructions: "I will now go around to each station for their weather reports. When called upon, please provide your location and any observations that meet the criteria previously stated." and a "Circle back" button. A "Log Report" button is also visible. On the right, a "Check-in" form is shown, including fields for Station Callsign (KE9CGS), Location (Thompson & Meridian), Report Type (Hail), Hail Size (Quarter 1"), Details (Measured, covering the yard), and Time observed (17:05). A "Log Report" button is at the bottom of this form. At the bottom of the interface, a "RECENT LOG" section shows two entries: "17:22 CHECK-IN KC9SDK checked in [SW]" and "17:22 CHECK-IN KB7CHY checked in [SW]".

A hail report ready to log: type, size, location, details, and the time observed.

The Report tab builds properly formatted NWS style reports. Pick the report type and the form shows the right fields: hail sizes from pea to softball, the Beaufort scale for wind, source, depth, flow, and trend for flooding, and target for damage. The details box takes everything else. The time observed field matters for delayed reports: a station reporting hail that fell twenty minutes ago gets the real observation time on the record.

Each report is stored with its structured data, so the final report page can tabulate every weather report by time, callsign, and type.

Awaiting Report and Reports Made

TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING.

TEST TESTING N9MAN NC You: N9MAN (NC) Transfer NC QSY Open: 2 minutes Suffix 4 stns 1B 0M 1R Full Script

Preamble Initial Reports Liaison SW NW NE SE Circle Back Continue Close

< Previous Change Setup 8 / 10 Next >

Weather status: Approaching Imminent Edit NWS Bulletin Bulletin loaded

⚠ There are 3 stations with incomplete information.

8 / 10 Circle Back REPORTS

I will now go around to each station for their weather reports. When called upon, please provide your location and any observations that meet the criteria previously stated.

Circle back

Are there any additional stations wishing to check in, with or without a report?

Edit stations on the Stations tab on the right.

< Previous 8 / 10 Next >

RECENT LOG

17:24 REPORT KE9CGS: [Thompson & Meridian] - HAIL: Quarter 1". Measured, covering the yard (observed 17:05)

17:22 CHECK-IN KC9SDK checked in (SW)

Check-in Report Stations (4) Log (6) Add to Log

Station Callsign W9ABC

Location e.g. 38th & Meridian

Report Type Other

Details Location, additional details...

Time observed (optional — for delayed reports) e.g. 14:32 — blank = now

Log Report

AWAITING REPORT (3)

SW N9MAN N/A SW KB7CHY

SW KC9SDK

REPORTS MADE (1)

SW KE9CGS Thompson & Meridian

Tiles track who still owes a report. Click a tile and the form prefills.


Below the report form, every checked-in station appears as a tile, grouped in quadrant order. Click a tile and the callsign and location drop into the form. Once a station's report is logged, its tile moves to the green Reports Made list. During the circle back pass you simply work the Awaiting Report list top to bottom until it is empty.

Circle Back and incomplete stations

Stations missing base or mobile or a location are counted as incomplete. The Circle Back section shows the count, the Stations tab highlights each incomplete station in amber with a circle back

icon, and the closing section refuses to let you forget: a red warning with a Go to Circle Back button appears if incomplete stations remain when you reach the close.


Continue Running the Net

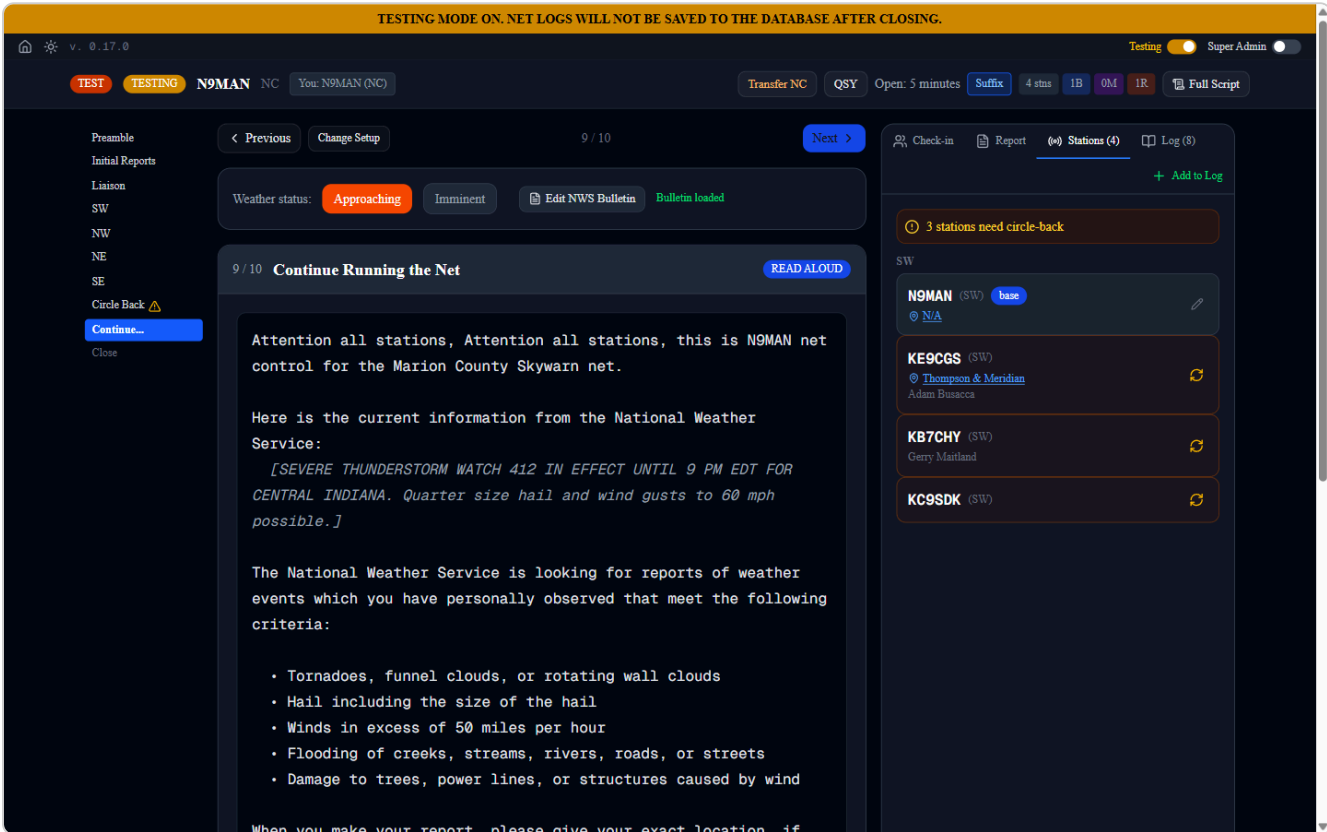


The continuity section. The timer reminds you to re-read the criteria every ten minutes.

Most of a long activation is spent in this section. The script re-reads the NWS criteria and current bulletin, and a countdown timer flashes a reminder roughly every ten minutes during quiet stretches. Clicking the reminder logs a continuity announcement and resets the timer. Check-ins, reports, and station edits all stay available from the tabs.

Handing off net control

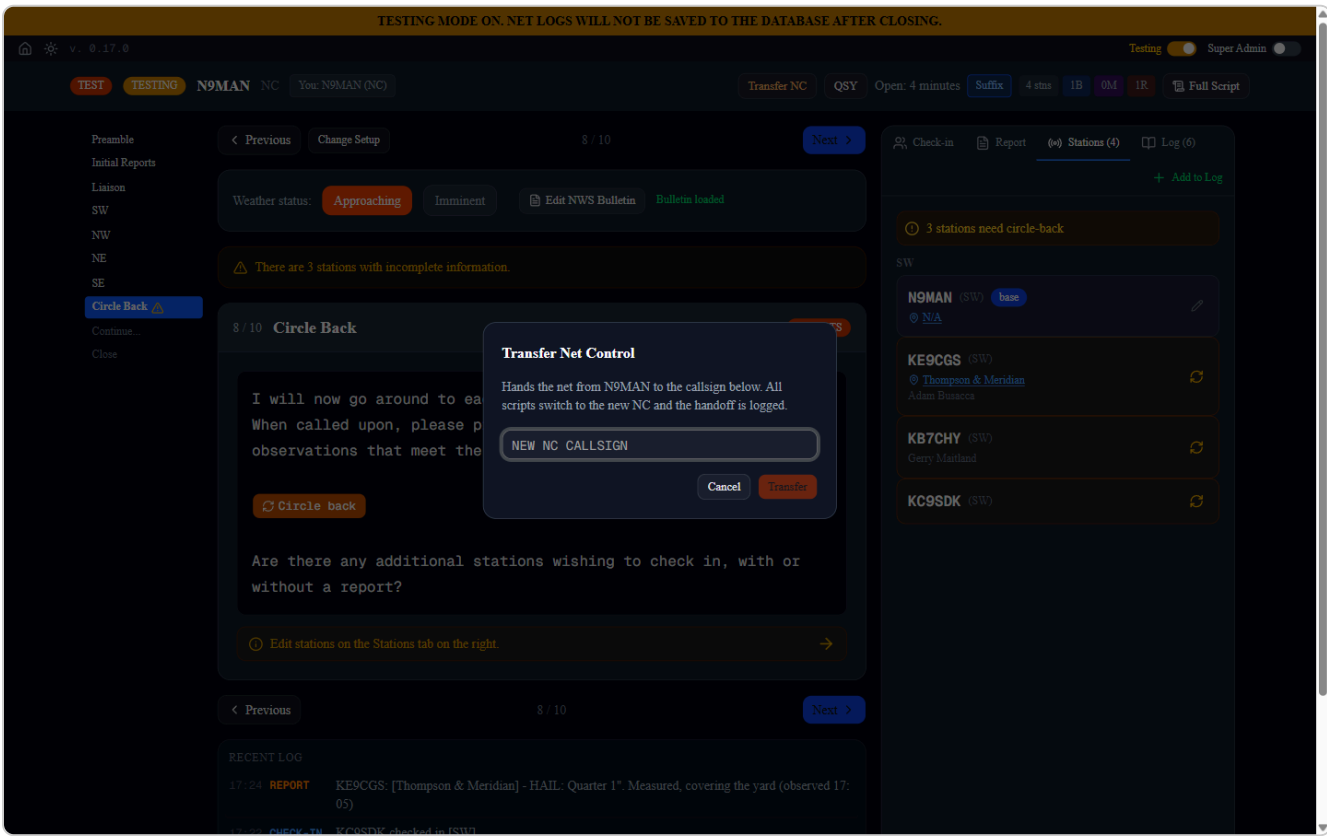

The outgoing NC can hand the net to any callsign.

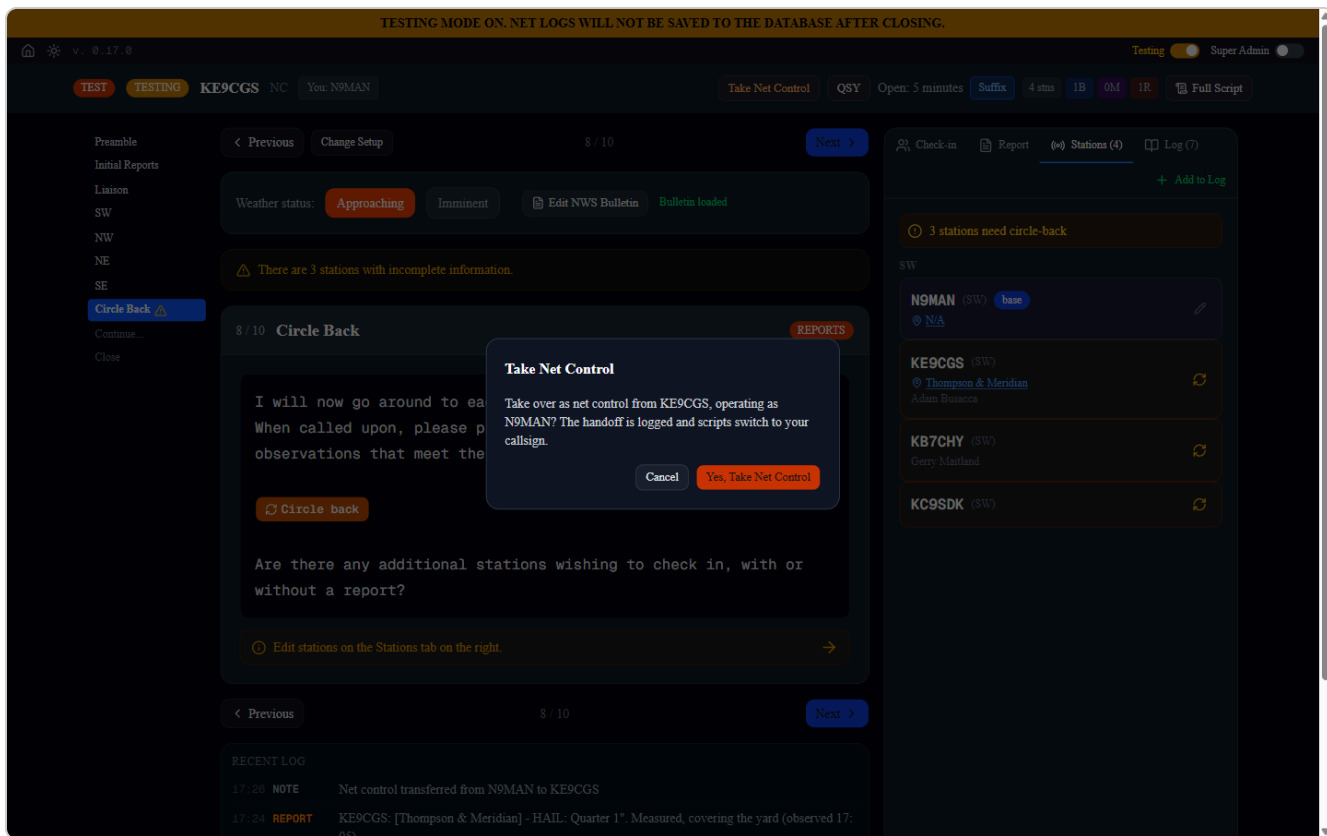


Or the incoming NC takes it from their own device with one confirmation.

Long activations outlast one operator. There are two ways to hand off, matching how it happens on the air. If you are the current NC, press Transfer NC in the header and enter the new callsign. If you are the incoming NC sitting at your own device, press Take Net Control and confirm. Either way the handoff is logged, the new NC is checked in if they were not already, every script switches to the new callsign instantly on all devices, and the summary report shows both operators as opener and final NC. The header button on each device updates to reflect whether that device now runs the net or watches it.

EXAMPLE

N9MAN has run the net for two hours and KE9CGS is taking over from home. KE9CGS opens the net on his own laptop, which asks who is operating the device. He enters KE9CGS, presses Take Net Control, and confirms. On the air: "KE9CGS now has net control." In the app: the handoff is already logged, and N9MAN's screen now shows KE9CGS as NC with a Take Net Control button in case he needs it back later.

Closing

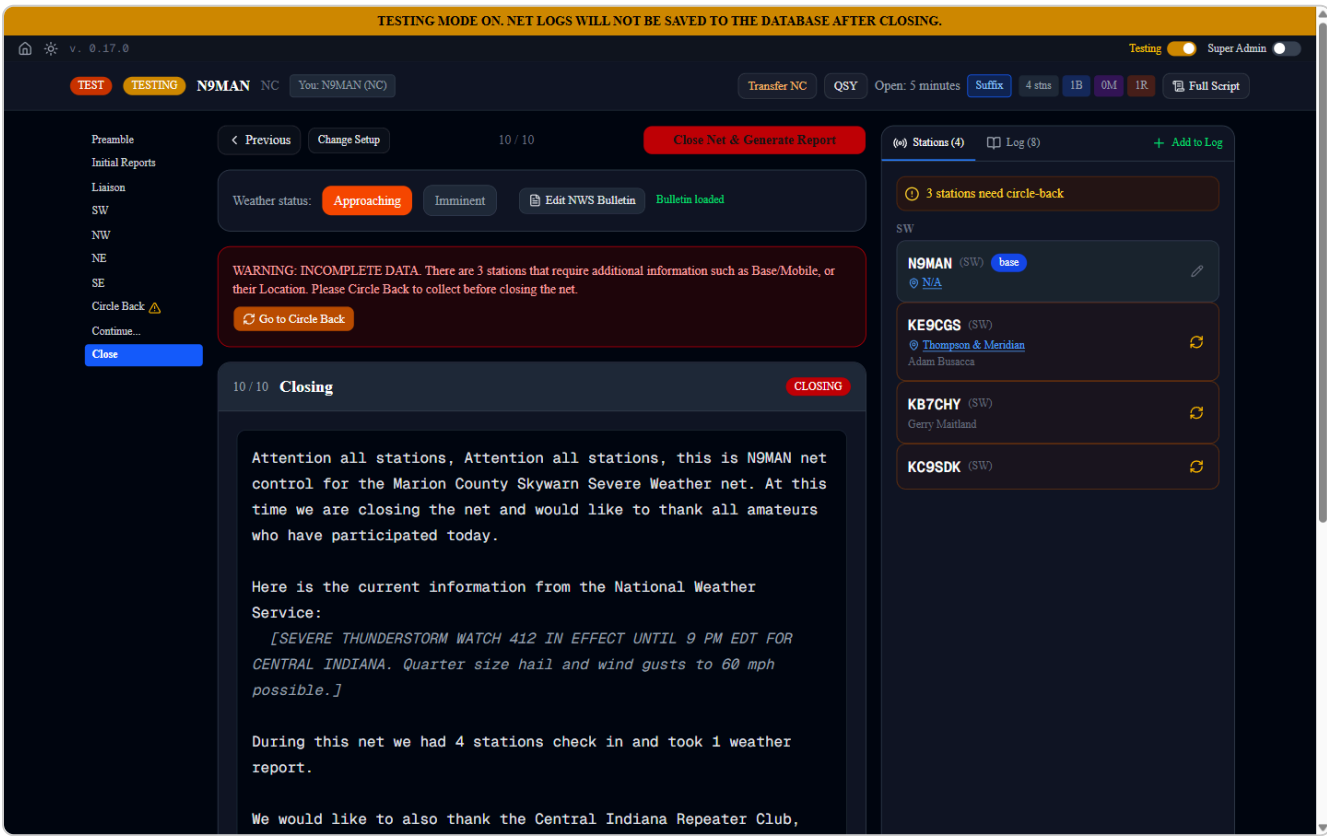


The Skywarn close reads the current bulletin, tonight's totals, and the actual time.

9. Running the Siren Check Net

The siren net is short and precise: early check-ins before 11:00, the county sounds the sirens, then stations report what each siren did. The app tracks every siren individually and keeps a permanent county wide history of every check.

Preamble, before 11:00

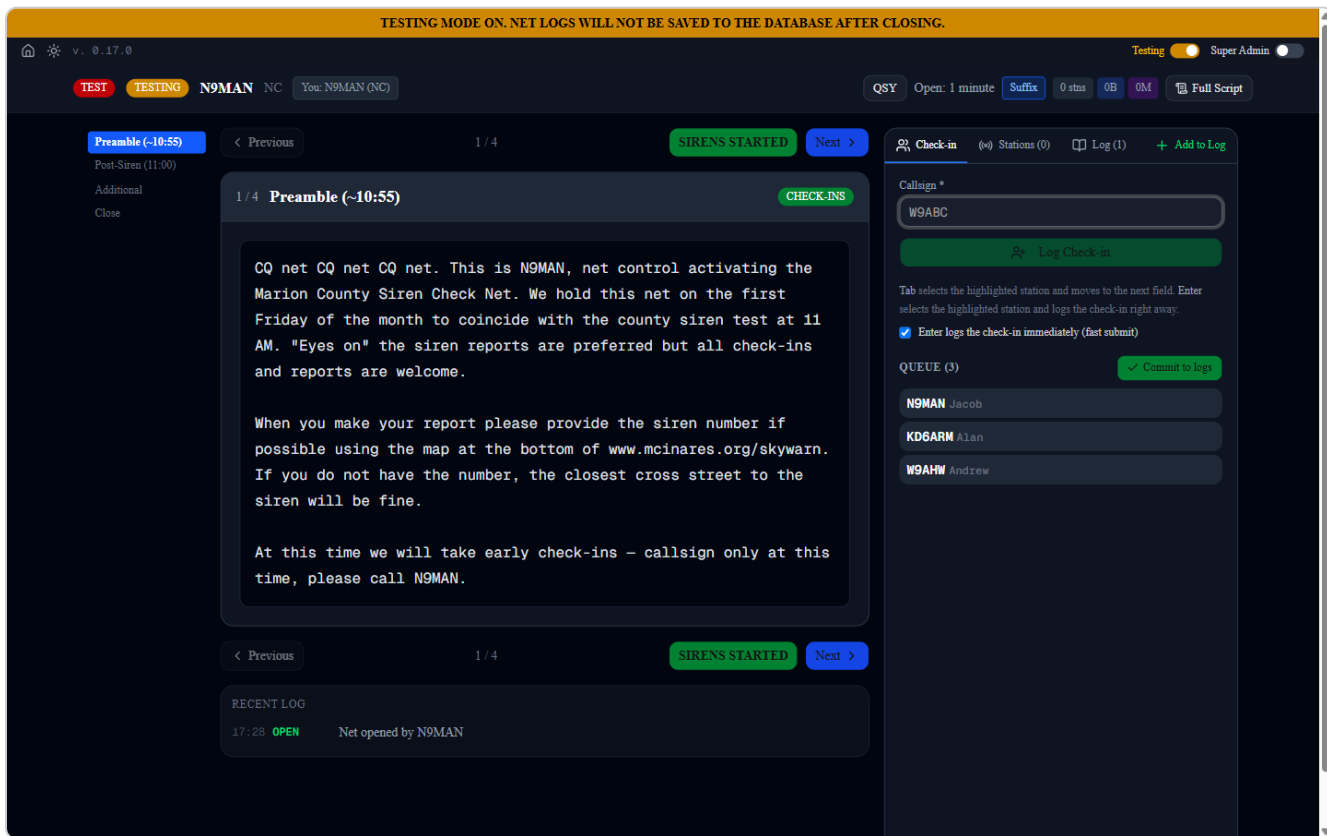

Early check-ins are callsign only. You are already in the queue as net control.

Early check-ins are callsign only, straight into the queue. The app seeds you, the net controller, into the queue automatically. Siren numbers and locations come later, with the reports.

SIRENS STARTED and STOPPED

A dedicated button in the section navigation logs the moment the sirens actually sound. Press SIRENS STARTED at 11:00, and the button becomes SIRENS STOPPED for when they wind down. Both drop timestamped entries into the log. After both are logged the button offers RESET SIREN STATUS in case they were pressed in error.


Post-Siren reports

The screenshot shows a web application interface for "Post-Siren reports" in "TESTING MODE". At the top, a yellow banner reads "TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING." The interface includes a top navigation bar with buttons for "TEST", "TESTING", "N9MAN", and "NC", along with a "You: N9MAN (NC)" indicator. On the right, there are status indicators for "QSY", "Open: 2 minutes", "Suffix", "3 stns", "1B", "0M", and a "Full Script" button. The main content area is divided into three sections. The left section has a "Preamble (-10:55)" and a "Post-Siren (11:00)" button. The middle section, titled "2 / 4 Post-Siren (11:00)", contains a text box with instructions: "I will take additional check-ins in a moment. First I will go through the current list: when called upon please report the siren number using the map at the bottom of www.mcinares.org/skywarn if possible, or the siren location to the best of your knowledge. Each station should report: • Siren number or nearest cross street • Whether it sounded with rotation • Any visual observations – damage or repair needed". Below this is a "Log reports using the Report tab." instruction and a "Circle back" button. The right section, titled "REPORTS", contains a "Station Callsign" field with "KD6ARM", a "Location" field with "e.g. 38th & Meridian", and a "Siren Number" field with "12". There are three toggle switches for "Sound" (Yes), "Rotation" (Yes), and "Visual" (No). Below these is a "Siren Report *" text area with the placeholder "Damage/repair notes, observations...". At the bottom right, there is a "Log Report" button and a section titled "AWAITING REPORT (3)" with three entries: "N9MAN N/A", "KD6ARM", and "W9AHW". A "RECENT LOG" section at the bottom left shows a list of events: "17:29 NOTE Sirens started — logged by N9MAN", "17:29 CHECK-IN W9AHW checked in", "17:28 CHECK-IN KD6ARM checked in", "17:28 CHECK-IN N9MAN checked in (base) @ N/A", and "17:28 OPEN Net opened by N9MAN".

A report for siren 12: sound yes, rotation yes, visual not checked. Location or siren number is required.

Each report needs the siren number (preferred) or the nearest cross street. The three toggles record what the station observed: Sound, Rotation, and Visual inspection, each independently yes, no, or left unset. The notes box takes damage and repair observations. A station covering multiple sirens files one report per siren.

If you enter a siren number the county database does not know, the app stops and asks before logging it under a UNK name, and registers it so the siren editor can resolve it later. When editing a station, the Find Sirens button geocodes their location and fills in the nearest siren numbers automatically.

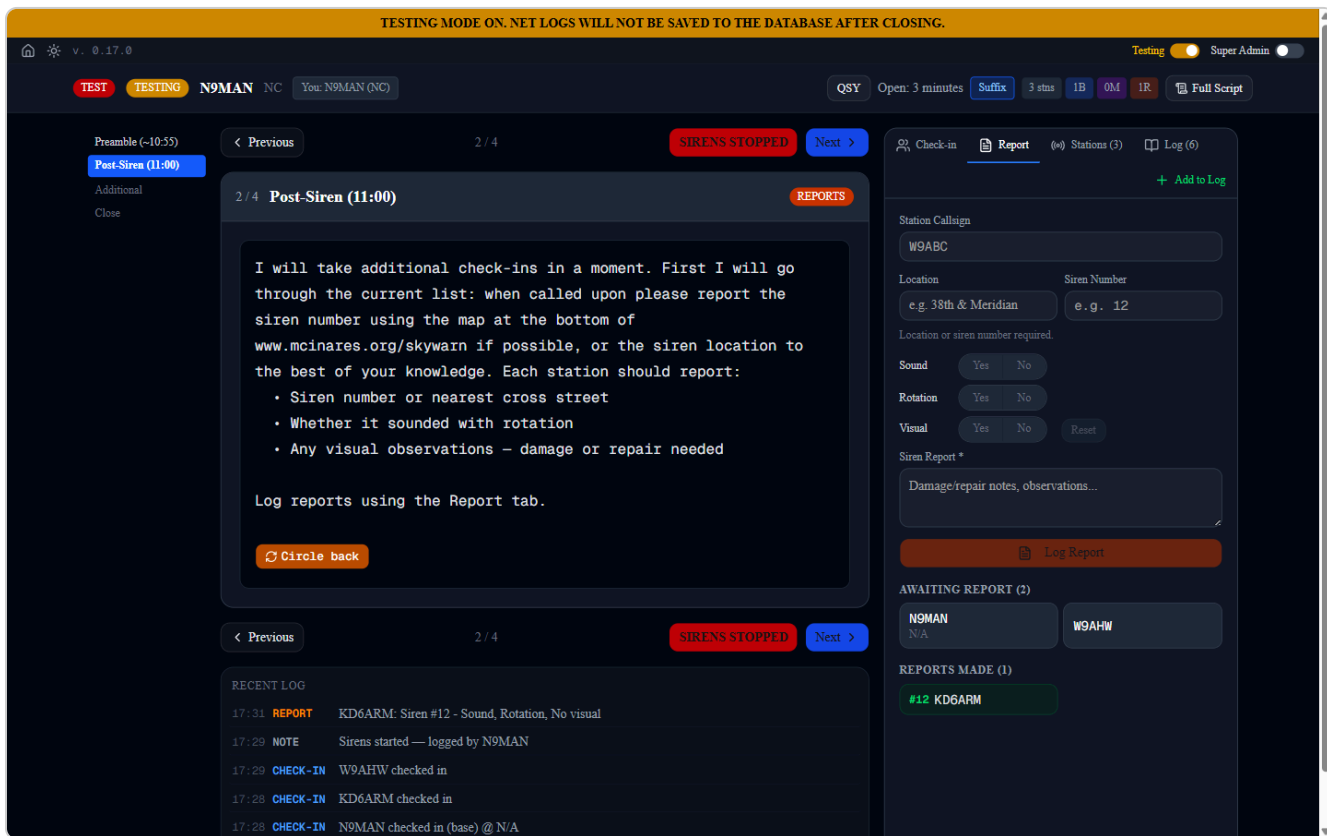

One tile per siren per station. KD6ARM has reported siren 12 and moved to Reports Made.

The tiles work per siren, not per station. A station that took sirens 12 and 14 shows two tiles, and reporting on 12 still leaves 14 in Awaiting Report. Reported tiles stay clickable, because a second report on the same siren simply adds to the record.

Station list

Each station's siren numbers appear on the Stations tab as links that open the county siren map at that siren's location.

Permanent siren history

Every siren report also writes a row into a permanent county history, independent of the net. That history powers the Siren Report page in section 11, which is how the county knows siren 47 has failed three checks in a row. Editing or deleting a report entry keeps the history in step automatically.

10. Closing a net and the summary report

Press Close Net & Generate Report on the closing section. The net locks, and the report page opens.

TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING.

⌂

☼

v. 0.17.0

Testing ☒ Super Admin ☐

Download CSV

Print / Save PDF

TESTING net data has been automatically deleted. This report is for review only.

Net Summary Report

Marion County Skywarn Severe Weather Net

Generated: July 7, 2026 17:27

NET SUMMARY

Net Type	Marion County Skywarn Severe Weather Net
Net Controller	N9MAN
Liaison	N/A
Net Opened	July 7, 2026 17:21
Net Closed	July 7, 2026 17:27
Duration	6 minutes
Total Unique Stations	4
Base Stations	0
Mobile Stations	0
Weather Reports	1

STATIONS CHECKED IN (4)

KE9CGS	KB7CHY	N9MAN	KC9SDK
--------	--------	-------	--------

WEATHER REPORTS (1)

Time	Callsign	Type	Report
17:24:18	KE9CGS	Hail	[Thompson & Meridian] - HAIL: Quarter 1". Measured, covering the yard (observed 17:05)

DETAILED LOG (9 ENTRIES)

Time	Type	Entry
17:21:28	NET OPEN	Net opened by N9MAN
17:21:29	CHECK-IN	N9MAN checked in (net control)
17:21:58	CHECK-IN	KE9CGS checked in [SW]
17:22:07	CHECK-IN	KB7CHY checked in [SW]
17:22:28	CHECK-IN	KC9SDK checked in [SW]
17:24:18	REPORT	KE9CGS: [Thompson & Meridian] - HAIL: Quarter 1". Measured, covering the yard (observed 17:05)
17:26:34	NOTE	Net control transferred from N9MAN to KE9CGS
17:27:00	NOTE	Net control transferred from KE9CGS to N9MAN
17:27:31	NET CLOSE	Net closed at 17:27 local

Marion County ARES Net Logger — mcinares.org

A Skywarn summary report: net facts, station list, the weather reports table, and the full log.

The report contains the net summary (type, controller, open and close times, duration, and totals), the station list in four columns sorted by suffix, and the complete timestamped log. Skywarn

reports add a weather reports table with time, callsign, type, and content. Siren reports add a siren results table with one row per siren and yes or no marks for sound, rotation, and visual.

TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING.

Testing

Super Admin

Download CSV

Print / Save PDF

TESTING net data has been automatically deleted. This report is for review only.

Net Summary Report

Marion County Siren Check Net

Generated: July 7, 2026 17:32

NET SUMMARY

Net Type	Marion County Siren Check Net
Net Controller	N9MAN
Net Opened	July 7, 2026 17:28
Net Closed	July 7, 2026 17:32
Duration	4 minutes
Total Unique Stations	3
Base Stations	1
Mobile Stations	0
Siren Reports	1

STATIONS CHECKED IN (3)

W9AHW

KD6ARM

N9MAN

SIREN REPORTS (1)

Siren	Sound	Rotation	Visual Insp.
012	✓	✓	✗

DETAILED LOG (7 ENTRIES)

Time	Type	Entry
17:28:09	NET OPEN	Net opened by N9MAN
17:28:10	CHECK-IN	N9MAN checked in (base) @ N/A
17:28:59	CHECK-IN	KD6ARM checked in
17:29:04	CHECK-IN	W9AHW checked in
17:29:55	NOTE	Sirens started — logged by N9MAN
17:31:12	REPORT	KD6ARM: Siren #12 - Sound, Rotation, No visual
17:32:38	NET CLOSE	Net closed at 17:32 local

Marion County ARES Net Logger — mcinares.org

A siren net report with the per siren results table.

Print / Save PDF produces a clean printout through the browser's print dialog. Download CSV exports the summary, station list, report tables, and detailed log in one file for records or email. Reports remain available forever from Previous Nets on the home page, and a super admin can still correct log entries afterward if a mistake surfaces later.

11. Siren tools

TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING.

⌂ ⚙ v. 0.17.0

Testing ☒ Super Admin ☐

Siren Report

Sort by: **Name** Proximity Last Reported Sound Rotation Both

SIREN	LOCATION	LAST REPORTED	SOUND	ROTATION	VISUAL	NOTES
001	1447 W Raymond St.	never	—	—	—	
002	New York St. / Senate	never	—	—	—	
005	2916 N Harding St, Riverside Plaza parking lot	never	—	—	—	
006	1902 Cottage, Pl RunPkway school	never	—	—	—	
007	2752 28th St.	never	—	—	—	
008	3517 Brookside Parkway South Dr	never	—	—	—	
009	814 E 24th St., Old Fire Station	never	—	—	—	
010	500 E Raymond St., IFD #29	never	—	—	—	
011	3710 E 38th St, behind Family Dollar Store	never	—	—	—	
012	955 Linwood Ave., by Hardee's	07/03/26 11:06	FAIL	FAIL	FAIL	
013	902 E 9th St., Wiles Center Day Nursery	never	—	—	—	
014	3849 E Raymond St., WW Ribs	never	—	—	—	
015	1001 S. Belmont, Rhodius Park, E on Wilkins	never	—	—	—	
016	Buchanan & Noble Sts.	never	—	—	—	
018	1445 Brookside Pkwy	never	—	—	—	
019	100 S Temple Ave, Tool Shed Rental	never	—	—	—	
020	1593 Everett St.	never	—	—	—	
021	4101 English Ave., Christian Park	never	—	—	—	
022	2300 Dr MLK, Watkins Park	never	—	—	—	
023	W 10th St and N Elmwood St	never	—	—	—	
024	5050 E 21st St.	never	—	—	—	

The Siren Report page: every siren's latest check status across all nets.

Siren Report (from the home page) is the county wide view: every registered siren with its most recent check results and history. It sorts by siren name, last reported date, pass or fail, or proximity to an address you type, which geocodes and orders sirens by distance. This is the page to review after each monthly net, and the one to hand to the county when they ask which sirens need service.

TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING.			
Siren Database (187)		Filter by name or location...	⌕ Merge
001	1447 W Raymond St.	⊙ 39.73643, -86.17959	✎
002	New York St. / Senate	⊙ 39.77149, -86.16276	✎
005	2916 N Harding St, Riverside Plaza parking lot	⊙ 39.80878, -86.18784	✎
006	1902 Cottage; Pl.RunPkway school	⊙ 39.74773, -86.12821	✎
007	2752 28th St.	⊙ 39.80703, -86.11865	✎
008	3517 Brookside Parkway South Dr	⊙ 39.78889, -86.10637	✎
009	814 E 24th St.; Old Fire Station	⊙ 39.80119, -86.14265	✎
010	500 E Raymond St.; IFD #29	⊙ 39.73694, -86.14859	✎
011	3710 E 38th St; behind Family Dollar Store	⊙ 39.82480, -86.10420	✎
012	955 Linwood Ave., by Hardee's	⊙ 39.78060, -86.09298	✎
013	902 E 9th St.; Wiles Center Day Nursery	⊙ 39.77938, -86.14843	✎
014	3849 E Raymond St.; WW Ribs	⊙ 39.73777, -86.10111	✎
015	1001 S. Belmont; Rhodius Park; E on Wilkins	⊙ 39.75420, -86.19200	✎
016	Buchanan & Noble Sts.	⊙ 39.75433, -86.14785	✎
018	1446 Brookside Parkway	⊙ 39.78633, -86.13731	✎

The Siren Database: 187 county sirens with names, locations, and coordinates.

Siren Database is the registry itself, seeded from the county's map. Each siren can be renamed or edited, and two entries can be merged when the same siren ended up under two names, such as a UNK entry created during a net. Merging rewrites the check history and old log references so nothing is lost.

12. The roster

TESTING MODE ON. NET LOGS WILL NOT BE SAVED TO THE DATABASE AFTER CLOSING.

v. 0.17.0

Testing ☒ Super Admin ☐

Roster — 1-95 of 95

All ▾

☒ First ☒ Last ☐ Address ☐ County ☐ License ☒ Last Check-In ☐ # of Check-Ins

CALL ^	FIRST	LAST	LAST CHECK-IN	LOOKUP
W9AHW edit	Andrew	Wickham	Jun 17, 2026	
KD9ARI edit	Ron	Beam		
KD6ARM edit	Alan	McDaniel	Jun 17, 2026	
K9ASK edit	Andy	Dodge	May 13, 2025	
KE9AUE edit	Anthony	Sherwood		
W3AXL edit	Patrick	McDonnell	Jun 17, 2025	
KE9BOI edit	Neil	McCracken	Nov 26, 2024	
KE9CGS edit	Adam	Busacca	Jun 17, 2026	
KB7CHY edit	Gerry	Maitland	Jun 17, 2026	
KE9CNJ edit	Ashley	Riner		
KD9CTN edit	Kyle	McClintock	Jun 17, 2026	
N9CXI edit	Thomas	O'Nan	Jun 17, 2026	
W9CXR edit	Calvin	Stauss	Jun 17, 2025	
NE9D edit	Matthew	Brown	Jun 24, 2025	
KE9DJN edit	James	Hollingsworth		
WB9DKL edit	Ronald	Cooper	Jun 17, 2026	
WG9DKL edit			Jun 16, 2026	Lookup
K9DRU edit	Andrew	Thomas		
KD9DVT edit				Lookup
KE9DVT edit	Timothy	Currie		
W9DWT edit	David	Sheean	Jun 17, 2026	

The full roster page with searchable, sortable columns.

The roster page lists every known operator with callsign, name, contact details, license class, and check-in history. Search, sort by any column, and toggle which columns show. Names edited here, or through any station editor during a net, update everywhere at once, past nets included, because logs reference the person rather than a copy of their name. Two roster entries for the same person can be merged by a super admin.

13. Practice runs and admin tools

Testing mode

Flip the Testing toggle in the top bar before opening a net and the net runs as a rehearsal: a yellow banner shows throughout, the net is marked TEST, and the moment you view its report the entire net and its data are deleted. Testing nets never touch the roster or the siren history. This is the way to learn the app or train a new net control operator, and every screenshot in this manual was taken this way.

Super Admin

The Super Admin toggle unlocks destructive actions: deleting previous nets, deleting roster entries, merging rosters and sirens, and force closing a stuck net from the home page. It requires typing a confirmation phrase, shows a red banner while active, and should stay off during normal operation.

Time Set

Available only in Super Admin mode. Time Set shifts the clock used for all logged timestamps, shown in a purple banner while active. Its purpose is entering a net after the fact: if the logger was down on Wednesday and you are reconstructing the net on Thursday from paper notes, set the clock to Wednesday 19:30 and log normally. Every entry lands with Wednesday timestamps.

14. Quick answers to common situations

Situation	What to do
Browser crashed mid net	Reopen the site and tap the RESUME banner on the home page. Everything is where you left it, including the un-committed queue.
Wrong callsign logged	Stations tab, pencil icon, fix the callsign. Every log entry for that station in this net updates. The app asks one confirmation because callsign changes ripple.
Station moved during the net	Edit the station and pick "Station has moved" instead of "Update inaccurate data." The move is logged as its own entry rather than silently rewriting history.
Wrong name autofilled	Fix the name in the station editor. Name fixes are permanent roster updates, so the app warns before saving.
Repeater fails	Press QSY in the header. The dialog is prefilled with the backup repeater for the net type. Logging it records the move for the report.
Station checked in twice	The form warns on duplicates. If it was two real check-ins (in and out, then back), force the manual entry. Otherwise cancel.
Missed a report's real time	Log it now, then click the entry in the log and correct the timestamp.
NC needs a break (Skywarn)	Incoming NC presses Take Net Control on their own device, or outgoing NC presses Transfer NC. One confirmation, fully logged.
Red save error appeared	Connection hiccup. Check the Recent Log for whether the entry made it, and re-enter it if not.

Bulletin updated mid net (Skywarn)	Edit NWS Bulletin in the weather bar on any section. All scripts pick it up immediately.
Unknown siren number reported	Confirm the UNK prompt to log it anyway, then merge it into the right siren in the Siren Database afterward.
Want to practice	Testing toggle on, run a full net, view the report. It cleans up after itself.

15. Log entry types reference

Type	Meaning
NET OPEN / NET CLOSE	The net's start and end, written automatically.
CHECK-IN / LATE CHECK-IN	A station joining the net. Late check-ins are those taken in the ARES late section.
REPORT	A weather or siren report, with structured details stored alongside the text.
TRAFFIC / ANNOUNCEMENT	Traffic passed or an announcement made, tied to the station.
ALT NC / LIAISON	The volunteers recorded from the preamble and liaison inputs.
CONTINUITY	A Skywarn continuity announcement, logged from the timer.
MOVED	A station changed location during the net.
NOTE	Everything else: QSY, siren start and stop, NC handoffs, and free form notes.

Marion County ARES Net Logger, manual generated July 2026 for version 0.17.0. Source:
github.com/themannoo/mcinares-net-logger