

Component identification

Slat control and monitoring system

SCO content — component identification

Object code	DMC-A350X-A-27-81-00-00A-A20A-A-T7BA	Issue	001-00 (new)
Issue date	2026-02-11	Language	en-GB
Responsible partner	AIRBUS S.A.S. (U8025)	Originator	AIRBUS S.A.S. — Training Centre Toulouse (U8025)
Security	01 — Unclassified	Quality assurance	Unverified
Applicability	A350X-900 and A350X-1000, all aircraft		

1 Component identification


This sharable content object teaches the location of the slat system components on the aircraft. It is used in the line maintenance familiarization course and takes about ten minutes to complete.

1.1 Belly fairing components

The power control unit is installed between frame C41 and frame C44, on the left hand side of the centre line, and is reached through access panel 196AB.

Wing components

SLAT CONTROL AND MONITORING SYSTEM — COMPONENT LOCATION (LH WING)

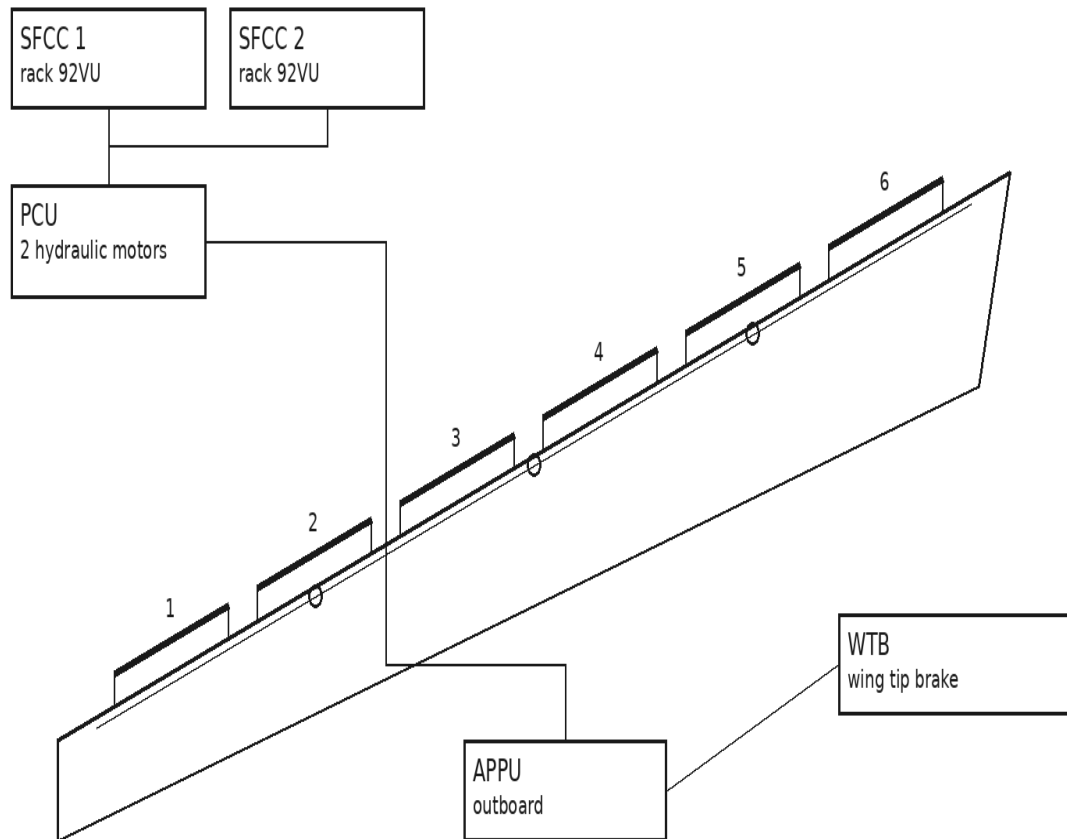

1 to 6 slat panels SFCC slat flap control computer PCU power control unit

Slat system — component location — Figure 1

LEARNING EVENT — A

On the illustration, select the power control unit. The learner has three attempts before the answer is shown.

1.2 Wing components

The asymmetry position pick-off unit is at the outboard end of the transmission, at rib 14. It is reached only with the slats fully retracted and both hydraulic systems depressurized.

LEARNING EVENT — B

Order the four steps required to gain access to the asymmetry position pick-off unit. The learner may not continue until the order is correct.