
PCM Wiring Chart for 1994 6.5TD OBD1
C217A - PINK 24 PIN

1994 6.5TD
C217A-PINK
24 PIN
LOOKING AT
END OF CONN

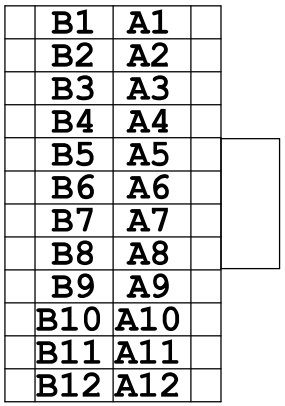

PIN	COLOR	CIRC	FUNCTION
A1	PNK	439	12v IGN (ECM1 FUSE)
A2	WHT	687	3-2 CONTROL SOL (4L60E ONLY)
A3	YEL	972	WASTEGATE SOLENOID CONTROL
A4	WHT	971	EGR VENT SOL - "S" ONLY
A5	YEL	960	SERVICE THROTTLE SOON LAMP
A6			NOT USED
A7	WHT	17	INPUT FROM BRK SW (NORM OPEN)
A8	RED/BLK	565	TIMING STEPPER COIL 1 HI A2
A9	TAN/BLK	564	TIMING STEPPER COIL 1 LO A1
A10	ORN/BLK	566	TIMING STEPPER COIL 2 LO B3
A11	YEL/BLK	567	TIMING STEPPER COIL 2 HI B4
A12	WHT/BLK	448	DIAGNOSTIC REQUEST
B1			NOT USED
B2			NOT USED
B3			NOT USED
B4	DK GRN/WHT	59	A/C ON SIGNAL
B5			NOT USED
B6			NOT USED
B7	TAN	996	APP 2 REF VOLTAGE
B8	DK BLU	507	GLOW PLUG "WAIT" LAMP SENSE
B9			NOT USED
B10	DK GRN	994	APP 3 SIGNAL
B11	YEL	1578	FUEL TEMP INPUT (OPTICAL SENSOR)
B12	TAN	472	INTAKE MANIFOLD AIR TEMP