
PCM Wiring Chart for 1994 6.5TD OBD1
C216 - PINK 32 PIN

1994 6.5TD
C216-PINK
32 PIN
LOOKING AT
END OF CONN

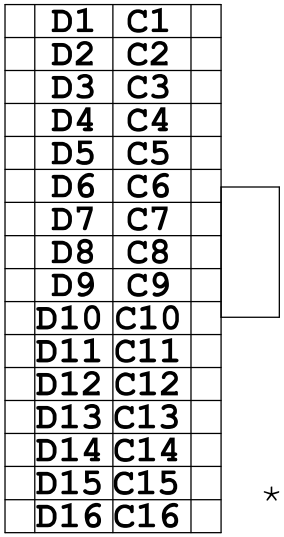

PIN	COLOR	CIRC	FUNCTION
C1	BLK/WHT	451	GROUND (G104 ENG) - G104>S103>"D6" C3
C2	RED	985	CLOSURE SIG./FUEL INJECT SIG.
C3	LT BLU	993	APP 2 SIGNAL
C4	DK BLU	992	APP 1 SIGNAL
C5	GRY/BLK	433	BARO. PRESS. SEN. SIG. - ALL ENGINES
C6	RED/BLK	1228	TRANS. PRESS. CONT. SOL. HI (FEED)
C7	LT GRN	432	BOOST PRES. SIGNAL (MAP)
C8	YEL	410	ENG. COOLANT TEMP SIG.
C9	YEL/BLK	1227	TRANS. TEMP. SEN. SIG.
C10	GRY	416	BOOST, CRANK, EGR, 5v. REF.
C11	LT BLU/WHT	1229	TRANS. PRESS. CONT. SOL. LO (RETURN)
C12	RED/BLK	1230	TRANS INPUT SPD SEN SIG RET LO (TWISTED PAIR)
C13	YEL	505	GLOW PLUG RELAY CONTROL
C14	TAN	800	SERIAL DATA CLASS 2
C15	BRN	437	"13" VSSB SIG 40 PPR 1:1 FOR TRANS CONTROL
C16			NOT USED
D1	TAN/WHT	551	GROUND (G104 ENG) - G104>P101>"D7" C3
D2	LT GRN	950	CLOSURE GRND (FSD/PMD) (95-BLK)
D3	PPL	999	APP 2 GROUND
D4	BRN	998	APP 1 GROUND
D5	GRY	961	APP 3 GROUND
D6	BLK	452	SEN GRND BOOST, EGR, ECT, IAT, TRANS TEMP, CPS
D7			NOT USED
D8 *	BRN/WHT	1586	2K PULSE VEH SPD (HAVE NOT FOUND ONE YET?)
D9	ORN	983	HI RES SIGNAL IP
D10	GRY	474	IP CAM, HI RES, 5v. REF
D11	YEL/BLK	995	APP 3 REF VOLTAGE
D12	DK BLU/WHT	1231	TRANS INPUT SPD SEN SIG HI (TWISTED PAIR)
D13	YEL	643	CRANK SENSOR SIGNAL
D14	PNK/BLK	987	IP CAM, HI RES, FUEL TEMP SEN GRNDS
D15	BRN/WHT	982	IP CAM POS SEN
D16			NOT USED

* 4L60E ONLY