
# TUBE BUSH NO.4

25 × 25mm (1" x 1") Tube x Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52290LF**

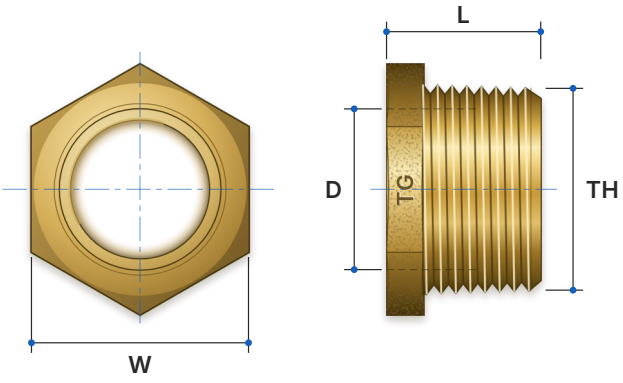




## SIZING CHART (MM)

| Part No. | L | W | D | TH |
|---|---|---|---|---|
| 52290LF | 24.5 | 34.5 | 25.45 - 25.56 | R 1" |

L = overall length. W = hex across flats. D = capillary socket bore for copper tube (min - max). TH = male thread. All dimensions in millimetres.

## SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **1" OD copper (capillary) x R 1" male** (BSPT taper)

## MATERIAL CHART

| Part | Material |
|---|---|
| Tube Bush | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

## FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Threads to AS ISO 7.1

Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.