
COMPRESSION ELBOW

15mm (1/2") Compression x Female 1/2", nylon olive

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **54058LF**

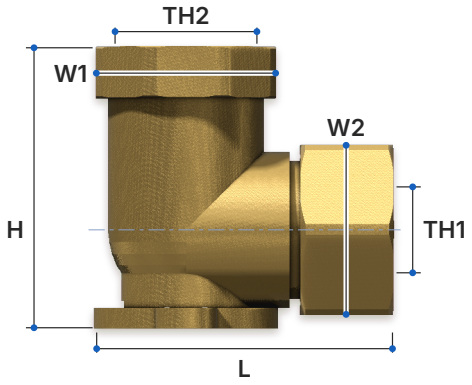



SIZING CHART (MM)

Part No.	L	H	W1	W2	TH1	TH2
54058LF		41.4	26.5	25.0	1/2" copper tube	1/2" BSP

L = back of body to compression nut face, assembled. H = back of body to thread face. W1 = body hex across flats. W2 = compression nut across flats. TH1 = tube end. TH2 = threaded end. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

SPECIFICATIONS

Connection **1/2" copper tube x 1/2" BSP female**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Nylon olive included

Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Body	DR Lead Free Brass (CW511L)
Compression nut	DR Lead Free Brass (CW511L)
Olive	Nylon

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.