
METER COUPLING

25mm Flanged x G 1" Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **C317LF**

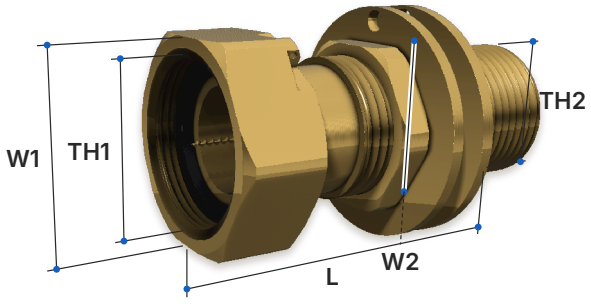



SIZING CHART (MM)

Part No.	L	W1	W2	TH1	TH2
C317LF	89.7	46.0	38.2	38.9mm/14 TPI	G 1"

L = overall length, meter nut face to outlet end, with the body flange seated on the nut lip. W1 = meter nut across flats. W2 = flange nut across flats. TH1 = meter nut thread. TH2 = outlet connection. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

SPECIFICATIONS

Connection **38.9mm/14 TPI meter nut (Whitworth) x G 1" male**

Working Temperature **1°C to 95°C**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Two flange nuts for panel or wall mounting
- Pressure tested to 1500 kPa
- Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Meter nut, body, flange nuts	DR Lead Free Brass (CW511L)
Meter seal	Nitrile rubber

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.