
BARREL UNION

40mm (1½") Male x Female Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **50518LF**

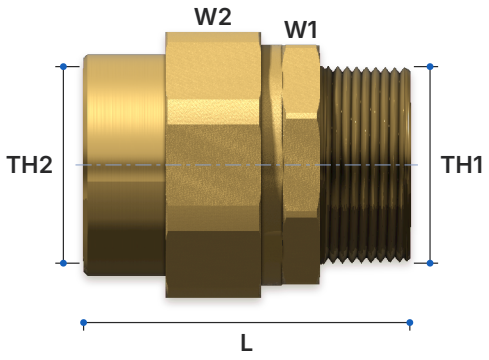



SIZING CHART (MM)

Part No.	L	W1	W2	TH1	TH2
50518LF		57.9	64.3	R 1-1/2"	Rp 1-1/2"

L = overall length assembled. W1 = body across flats (hex or octagon). W2 = union nut across flats. TH1 = body end. TH2 = tail end. All dimensions in millimetres.

SPECIFICATIONS

Connection **R 1-1/2" male x Rp 1-1/2" female**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

MATERIAL CHART

Part	Material
Body	DR Lead Free Brass (CW511L)
Union nut	DR Lead Free Brass (CW511L)
Tail	DR Lead Free Brass (CW511L)

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Metal to metal conical seat, no washer
- Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.