WEIGHT-ALTITUDE-TEMPERATURE ENHANCED OFFSHORE PROCEDURE

ROTOR SPEED 102%

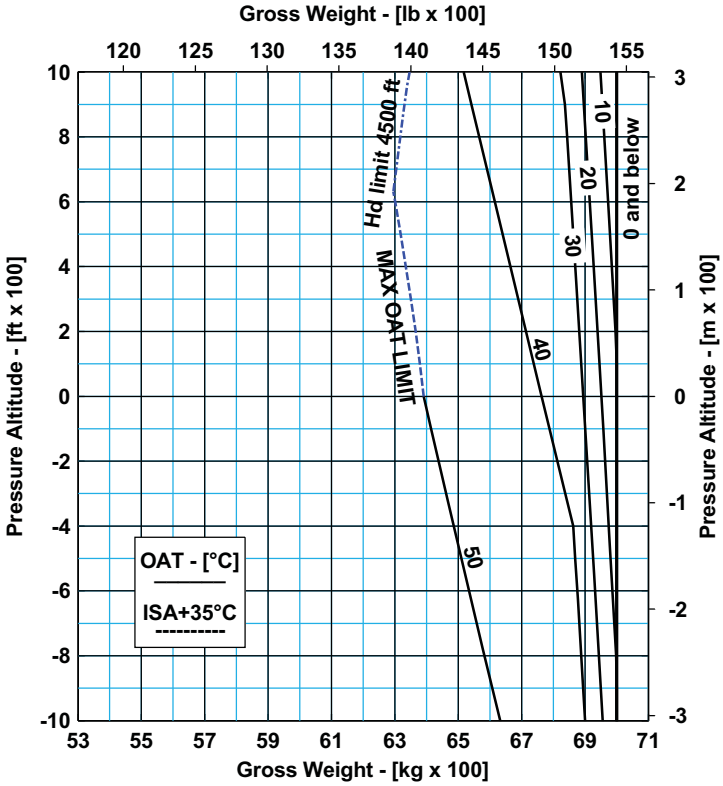

139G1580A025 Rev.B

ICN-39-A-155297-G-A0126-00001-A-02-1

Figure 4-1 Enhance Offshore Helideck Procedure Take-Off Weight Limitations

WAT for ENHANCED OFFSHORE TAKE OFF
Clean Air Intake

Hp [ft]	OAT [€C]									
	-40	-30	-20	-10	0	10	20	30	40	50
-1000	7000	7000	7000	7000	7000	7000	7000	6956	6901	6632
-500	7000	7000	7000	7000	7000	7000	6981	6926	6869	6510
0	7000	7000	7000	7000	7000	7000	6952	6895	6763	6392
500	7000	7000	7000	7000	7000	6979	6921	6863	6640	
1000	7000	7000	7000	7000	7000	6949	6890	6822		

139G1580A025 Rev.B

ICN-39-A-155297-G-A0126-00005-A-02-1

Figure 4-2 Enhance Offshore Helideck Procedure Take-Off Weight Limitations Table

WEIGHT-ALTITUDE-TEMPERATUR E
ENHANCED OFFSHORE PROCEDURE

EAPS OFF
ROTOR SPEED 102%

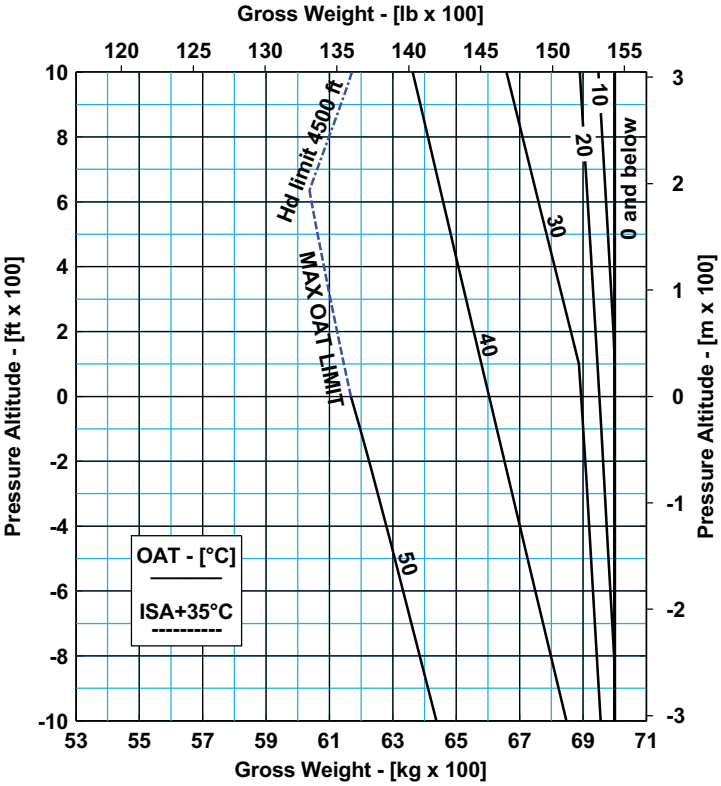

139G1580A025 Rev.B

ICN-39-A-155297-G-A0126-00002-A-02-1

Figure 4-3 Enhanced Offshore Helideck Take-Off Procedure Weight Limitations, EAPS OFF

WAT for ENHANCED OFFSHORE TAKE OFF
EAPS OFF

Hp [ft]	OAT [€C]									
	-40	-30	-20	-10	0	10	20	30	40	50
-1000	7000	7000	7000	7000	7000	7000	7000	6956	6848	6438
-500	7000	7000	7000	7000	7000	7000	6981	6926	6725	6306
0	7000	7000	7000	7000	7000	7000	6952	6895	6604	6167
500	7000	7000	7000	7000	7000	6979	6921	6785	6483	
1000	7000	7000	7000	7000	7000	6949	6890	6659		

139G1580A025 Rev.B

ICN-39-A-155297-G-A0126-00006-A-02-1

Figure 4-4 Enhanced Offshore Helideck Take-Off Procedure Weight Limitations Table, EAPS OFF

WEIGHT-ALTITUDE-TEMPERATURE ENHANCED OFFSHORE PROCEDURE

EAPS ON
ROTOR SPEED 102%

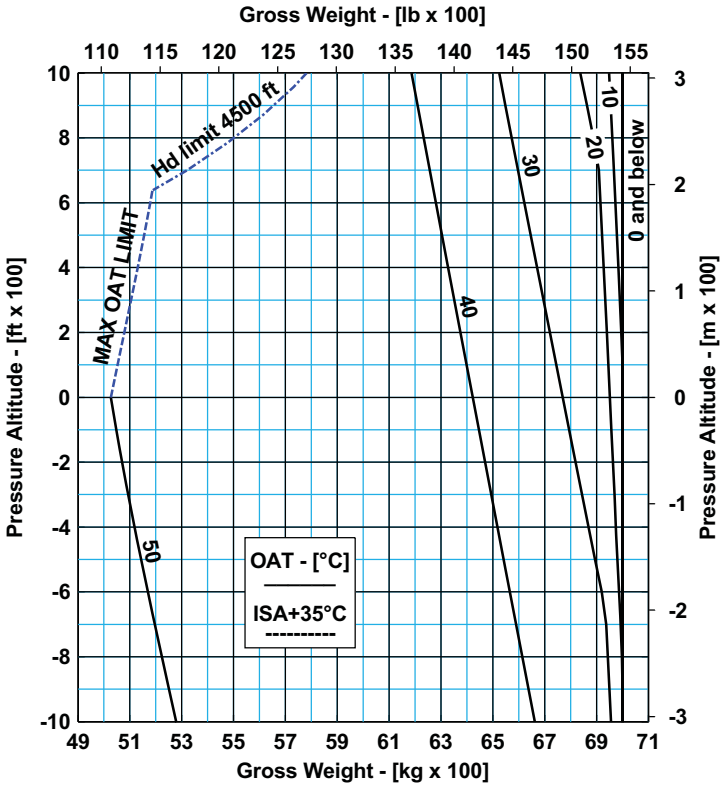

139G1580A025 Rev.B

ICN-39-A-155297-G-A0126-00003-A-02-1

Figure 4-5 Enhanced Offshore Helideck Take-Off Procedure Weight Limitations, EAPS ON

WAT for ENHANCED OFFSHORE TAKE OFF

EAPS ON

Hp [ft]	OAT [€C]									
	-40	-30	-20	-10	0	10	20	30	40	50
-1000	7000	7000	7000	7000	7000	7000	7000	6956	6662	5279
-500	7000	7000	7000	7000	7000	7000	6981	6895	6542	5143
0	7000	7000	7000	7000	7000	7000	6952	6769	6423	5027
500	7000	7000	7000	7000	7000	6979	6921	6646	6304	
1000	7000	7000	7000	7000	7000	6949	6838	6525		

139G1580A025 Rev.B

ICN-39-A-155297-G-A0126-00007-A-02-1

Figure 4-6 Enhanced Offshore Helideck Take-Off Procedure Weight Limitations Table, EAPS ON

WEIGHT-ALTITUDE-TEMPERATURE ENHANCED OFFSHORE PROCEDURE

IBF Installed
ROTOR SPEED 102%

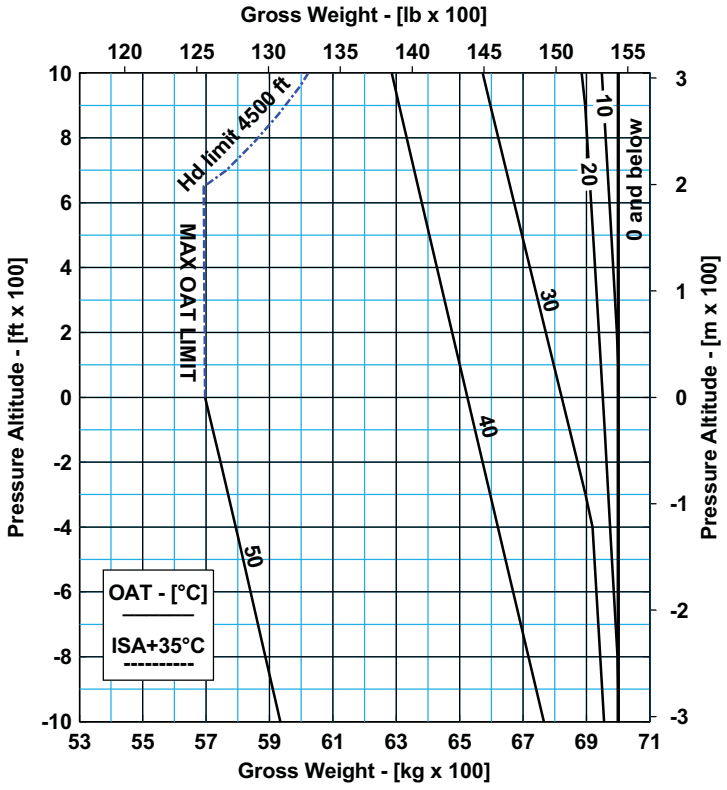

139G1580A025 Rev.B

ICN-39-A-155297-G-A0126-00004-A-02-1

Figure 4-7 Enhanced Offshore Helideck Take-Off Procedure Weight Limitations, IBF Installed

WAT for ENHANCED OFFSHORE TAKE OFF

IBF Installed

Hp [ft]	OAT [€C]									
	-40	-30	-20	-10	0	10	20	30	40	50
-1000	7000	7000	7000	7000	7000	7000	7000	6956	6766	5934
-500	7000	7000	7000	7000	7000	7000	6981	6926	6645	5817
0	7000	7000	7000	7000	7000	7000	6952	6822	6524	5696
500	7000	7000	7000	7000	7000	6979	6921	6697	6404	
1000	7000	7000	7000	7000	7000	6949	6885	6573		

139G1580A025 Rev.B

ICN-39-A-155297-G-A0126-00008-A-02-1

Figure 4-8 Enhanced Offshore Helideck Take-Off Procedure Weight Limitations Table, IBF Installed