

TECHNICAL ARCHITECTURE — CONFIDENTIAL


TokiStorage

Technical Architecture

No server. No subscription.


Three-layer distributed storage carrying voice and memory **a thousand years** forward.

INFRASTRUCTURE & SERVICE MAP

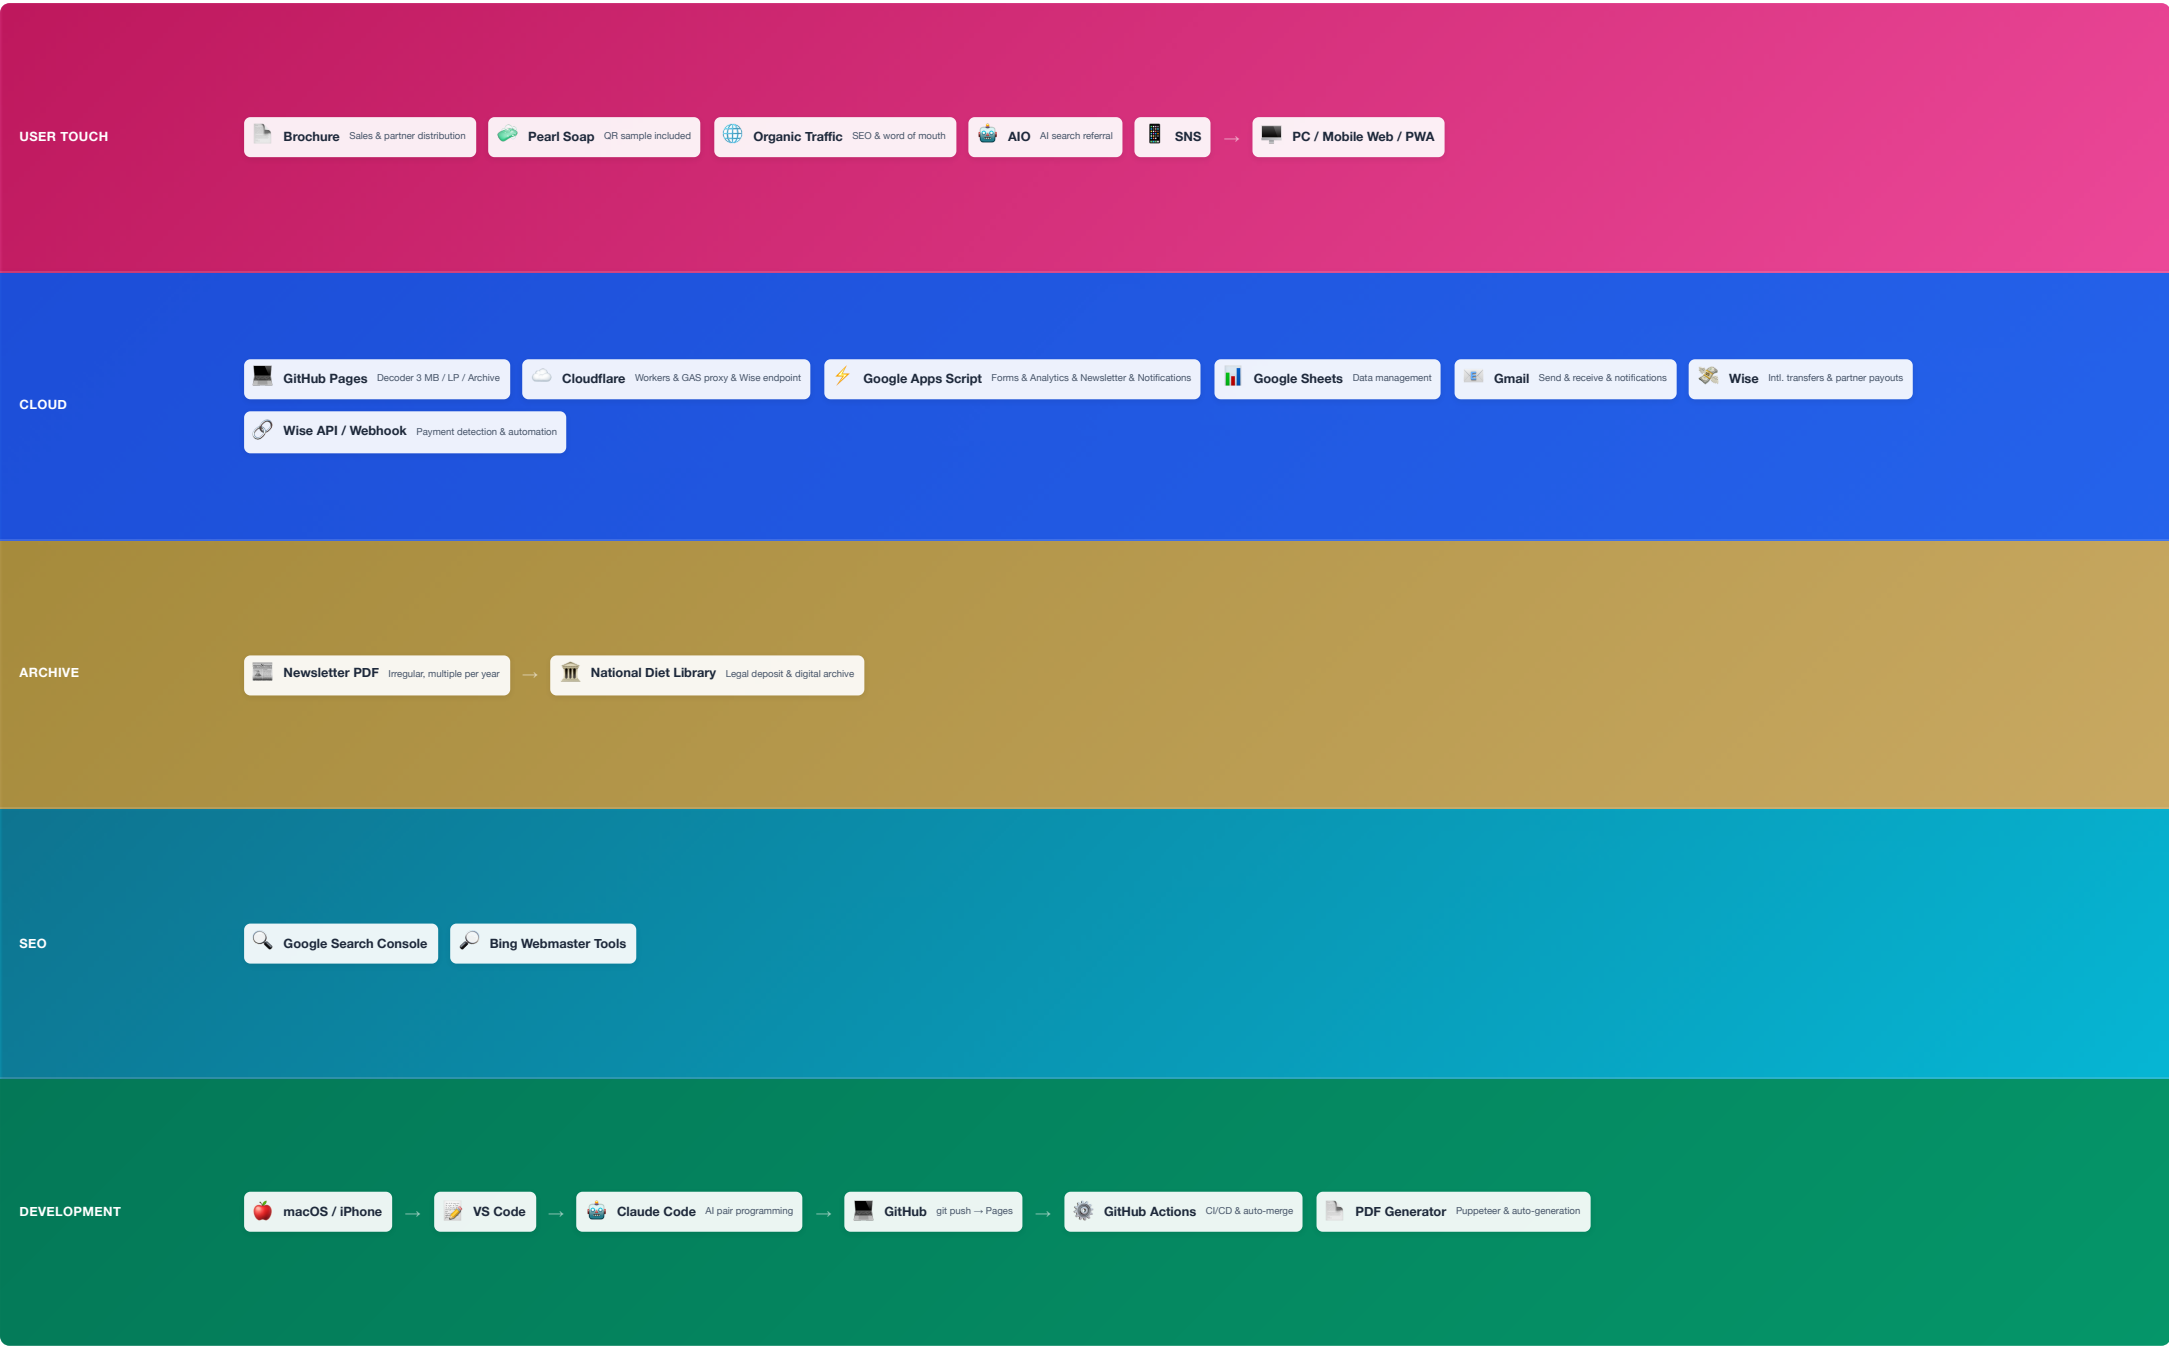

Zero fixed monthly costs. Zero proprietary servers — development, delivery, payments, and archiving all run on external services and public institutions. Frontend, GAS, and Cloudflare Workers run on JavaScript / HTML / CSS; generator scripts in Python.

ARCHITECTURE & DATA FLOW

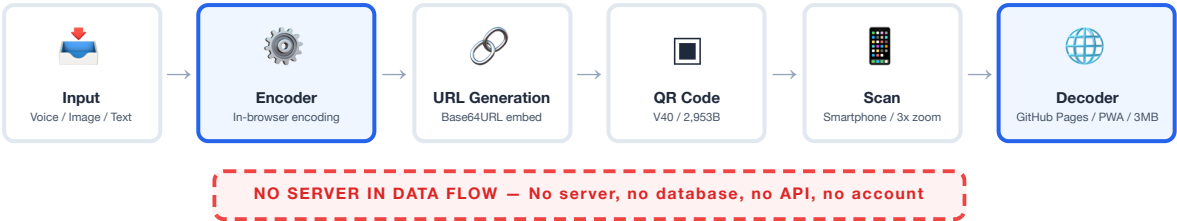


Data Type	Encoding	Max Capacity
Voice	Codec2 WASM (6 modes: 3200–450 bps)	~29 sec (450 bps)
Image	JPEG / WebP — in-browser resize + Base64URL	~2.2 KB
Text	UTF-8 — Base64URL	~2,900 chars

To eliminate service shutdown risk, servers are completely removed from the data flow. The QR code itself is the storage, and the decoder is just a 3 MB static site. With PWA, fully offline playback is possible. No customer data, personal information, or confidential data is held.

BULK MODE ARCHITECTURE

Supports long audio, high-res images, and long text beyond the single QR's 30-second limit

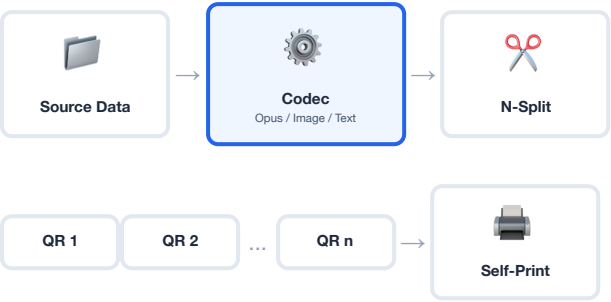

The server cannot see balances, revoke credits, or recover lost ones. This asymmetry is intentional by design.

 **Prepaid Credits**

- ¥150 / 1 code (\$1)
- IndexedDB (browser storage)
- No account required
- No personal info required
- No expiry
- Purchase via Wise transfer

MIGRATION ROADMAP

Component	Current	Migration Candidate	Trigger	Phase
Email Delivery	GAS + Gmail (100/day)	Amazon SES (62,000/mo)	Orders > 100/day	Phase 2
Production	Manual (print, laminate, pack, ship)	Domestic outsource (turnkey)	Orders > 50/day	Phase 2
Partner Payouts	Wise manual (monthly batch)	CSV batch → API automation	Volume increase	Phased
Voice Codec	Codec2 WASM (450 bps)	Next-gen low-bitrate codec	QR capacity up or quality demand	10-yr audit
QR Standard	Version 40, ECC-L (2,953B)	rMQR / JAB Code / next-gen 2D	ISO update & reader adoption	10-yr audit
Playback Stack	WebAudio API + WASM	Successor browser APIs	API deprecation notice	10-yr audit
Design seams in advance; act before crisis. Swapping a single sendEmail() migrates GAS to SES. Every component is independently replaceable — zero lock-in.				