


Segno LID 2.0mm x1 top plate + front lip + rear lap (= 143deg); rests on the base side walls; no top screws; legends on printed OVERLAY (see segno_overlay); FOLD with the DRAWN side as the OUTSIDE face (canonical mirror: encoder lands on the player's LEFT)

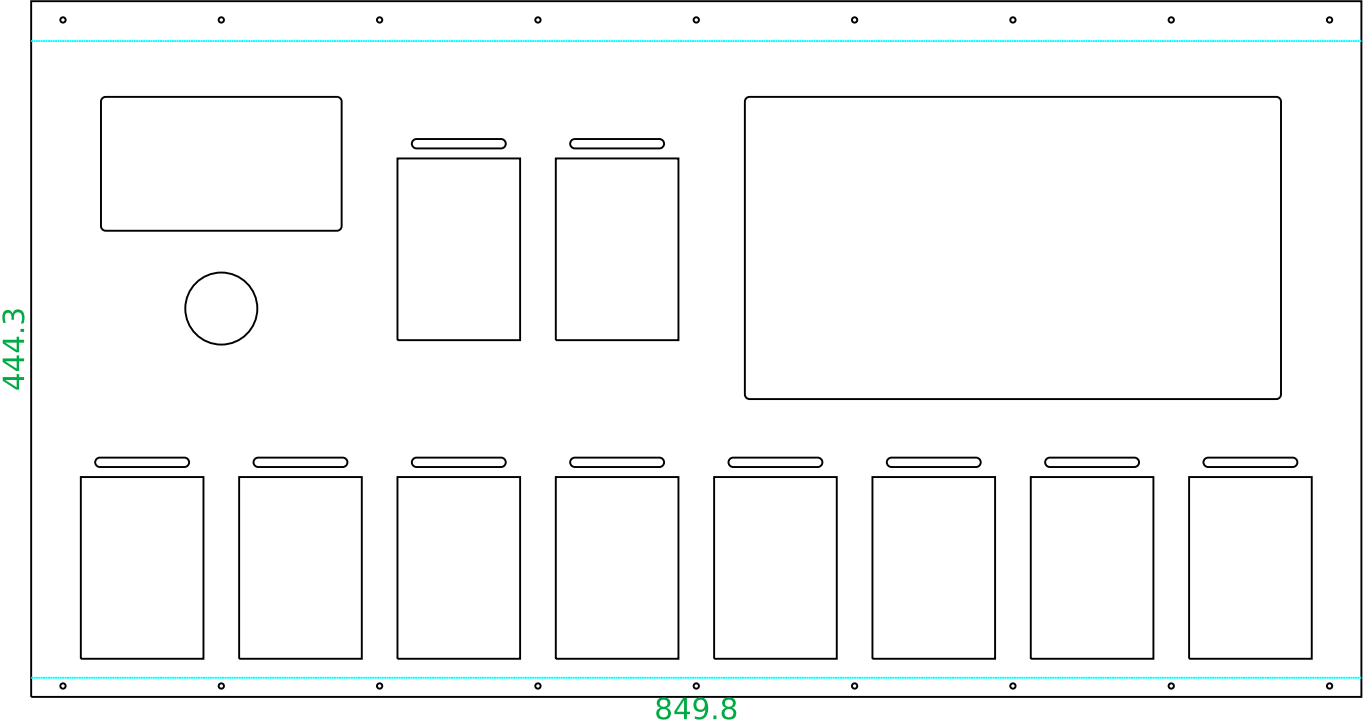

BEND TABLE (rotation = angle the flap turns THROUGH from flat; included = 180 - rotation)

#	FOLD LINE	POSITION	LENGTH	ROTATION	INCLUDED	DIRECTION	Ri	DEDUCTION
1	front lip	y = 12.19	849.8	77.502 deg	102.498 deg	DOWN, away from drawn face	2.0 mm	1.411 mm
2	rear lap	y = 418.83	849.8	36.942 deg	143.058 deg	DOWN, away from drawn face	2.0 mm	0.479 mm

K-factor 0.33 | bend allowance = rad(fold) x (Ri + K x T) | flat flap = outer length - deduction. The front-lip bend runs across the pedal apertures (12.1 mm of backing): V12 die, segmented punch, expect to straighten.

Segno loopstation enclosure

FACEPLATE | 2.0 mm 5052-H32 aluminium | QTY 1 | units mm | bend Ri 2.0 mm, K-factor 0.33

CUT + VENT = THROUGH-CUT (both, same operation) | BEND = FOLD LINE REFERENCE ONLY - do not cut, score, etch or mark | MASK = no-paint coating mask, DO NOT CUT | NOTE / ENGRAVE / SILK = lettering, not geometry