

FMUSER FUQ-4218B TS Re-Multiplexer 8 ASI & 512 IP Inputs 4 ASI & IP Outputs
UDP RTP RTSP Interfaces PID Re-Mapping EPG Insertion Digital TV Headend Product
 overview




The FUQ-4218A is an advanced TS re-multiplexer supporting up to 8 ASI and 512 IP inputs with dual ASI and IP outputs. It performs program multiplexing, PID re-mapping, and EPG insertion for signal processing. This device features LCD/keyboard and Web-based NMS for efficient control. Ideal for digital TV head-end systems and CATV broadcasting applications.

Key feature

Includes integrated management via LCD/keyboard and Web-based NMS for network control.

Principle Chart

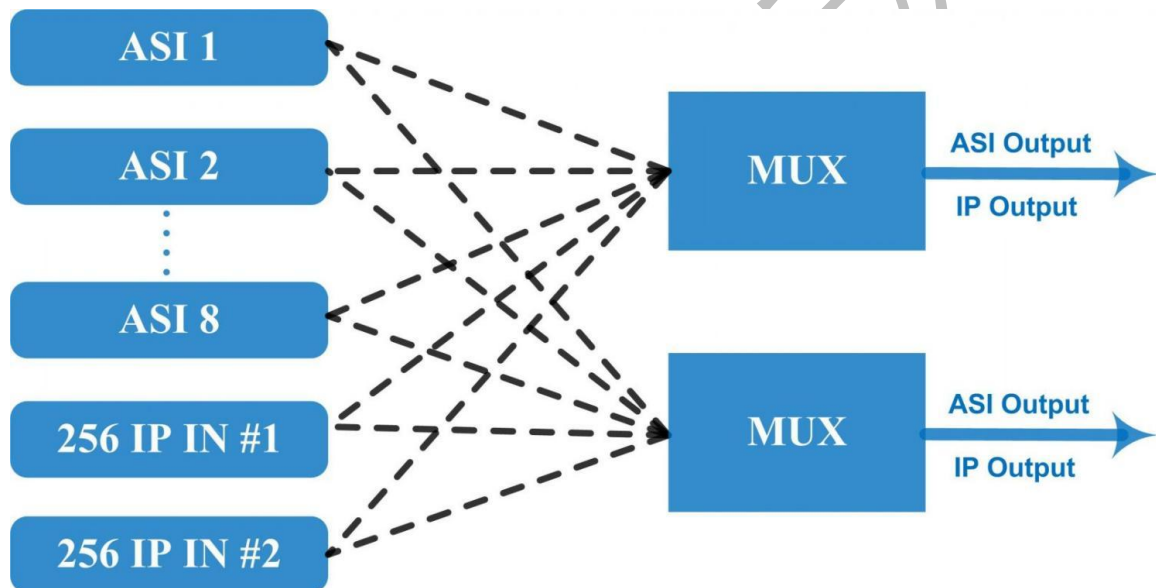

Specifications

Input	8 ASI input+512 IP input DATA 1 and DATA 2 over UDP protocol	8 ASI input+512 IP input DATA 1 and DATA 2 over UDP protocol
Re-multiplex	PID re-mapping	PID re-mapping
Re-multiplex	PCR accurate adjusting	PCR accurate adjusting
Re-multiplex	PSI/SI (PAT, PMT) tables auto generation and edition	PSI/SI (PAT, PMT) tables auto generation and edition
Output port	ASI	2 groups separate outputs (each group has 2 channels)
Output port	IP	MPTS over UDP, RTP/RTSP output (RJ45), 1000Mbps Ethernet, DATA 1 and DATA 2
PID	Output range	0x0000—0x1FFF
PID	PID transparent	Any PID transparent and mapping achievable
PID	Amount of output PID	180
NMS port	Ethernet port	10/100M/1000M self adaption
General	Dimensions	482mm×300mm×44mm (W×L×H)
General	Weight	3.5kg
General	Temperature	0~45■(operation), -20~80■(storage)
General	Power supply	AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)