

FUQ-4618SY 12-Channel IP to ASI Gateway with Dual Gigabit Inputs/DVB-ASI Outputs for Broadcast Transmission



Product overview

The FUQ-4618SY converts UDP/IP streams to DVB-ASI signals via 12 output channels, each with dual BNC interfaces. It processes MPTS/SPTS inputs through dual Gigabit Ethernet ports (RJ45/SFP), ensuring 840Mbps throughput with PCR restoration. This 1U rack-mount device supports SNMP/LCD control for broadcast centers and IPTV headends requiring stable TS stream conversion.


Key feature

Remote management via SNMP or local LCD control

Interface	Input	12 IP (MPTS/SPTS) over UDP, unicast and multicast, two 1000M input interfaces, RJ45/SFP
Interface	Output	12 ASI output, and each channel output with two BNC interfaces
Transmitting protocol	Input	TS over UDP
Transmitting protocol	Output	DVB-ASI
Bit-rate	Bit-rate	Max of each channel is 108Mbps, Max total bit-rate is 840Mbps
Miscellaneous	Dimension (W×L×H)	482mm×410mm×44mm
Miscellaneous	Weight	4kg
Miscellaneous	Temperature	0~45℃(operation) -20~80℃(storage)

Miscellaneous	Power	100~240VAC■50/60Hz
Miscellaneous	Consumption	22W

Principle chart

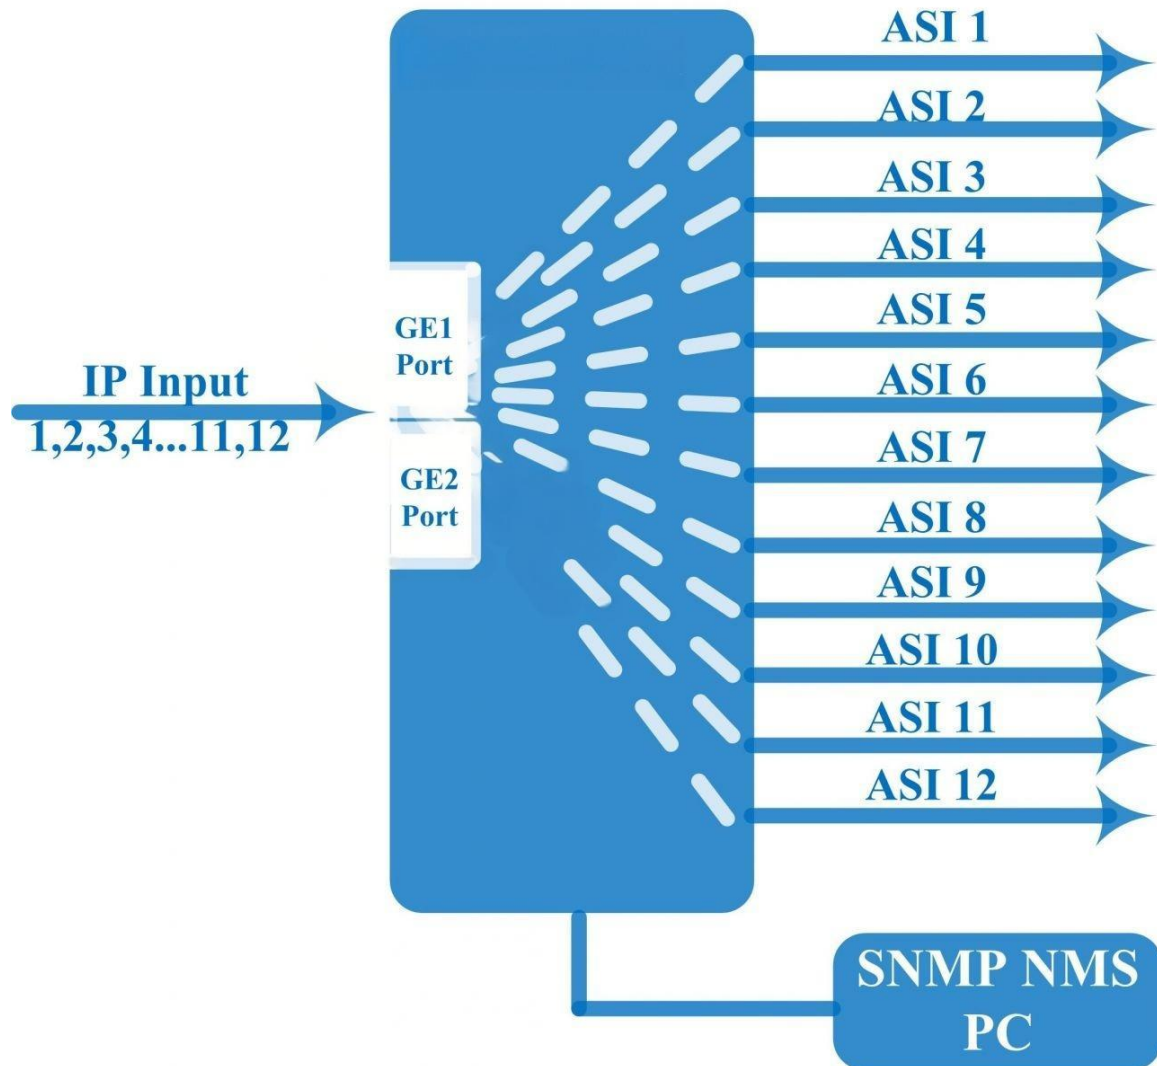

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227