

**FMUSER FUQ-4619T IPTV Gateway Server 7 IP Input Channels
SRT-HTTP-UDP-RTP-RTSP-HLS-TS to SRT-HTTP-UDP-HLS-RTMP Conversion Web
NMS Control for CATV Headends and Hospitality TV Systems**



SRT/HTTP/UDP/RTP/RTSP/HLS  SRT/HTTP/UDP/HLS/RTMP




Product overview

The FMUSER FUQ-4619T/FUQ-4619J is an IPTV Gateway Server combining IP Gateway and IPTV server functions. It converts IP streams (SRT/HTTP/UDP/RTP/RTSP/HLS/TS) to output protocols (SRT/HTTP/UDP/HLS/RTMP) with IP anti-jitter stabilization. Features web-based NMS control via DATA port and supports ~80 HD/SD programs (2Mbps). Ideal for compact CATV headends and hotel TV systems with live/VOD services.


Key feature

Customizable IPTV: Includes FMUSER IPTV APK for tailored hotel TV interfaces and ad insertion.

IP Protocol Conversion

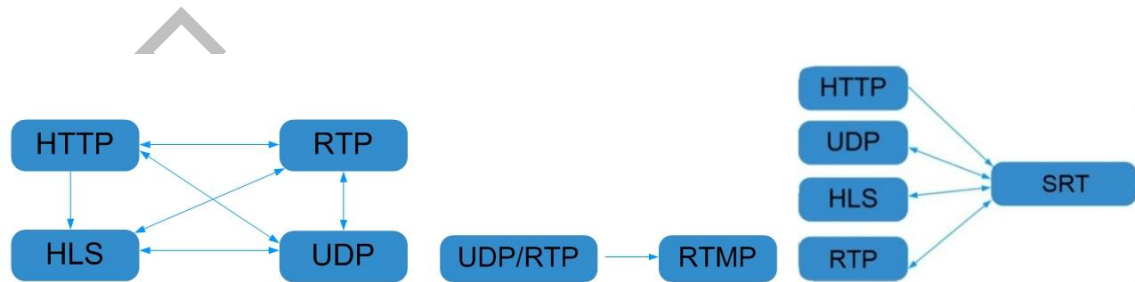

General Principle Chart

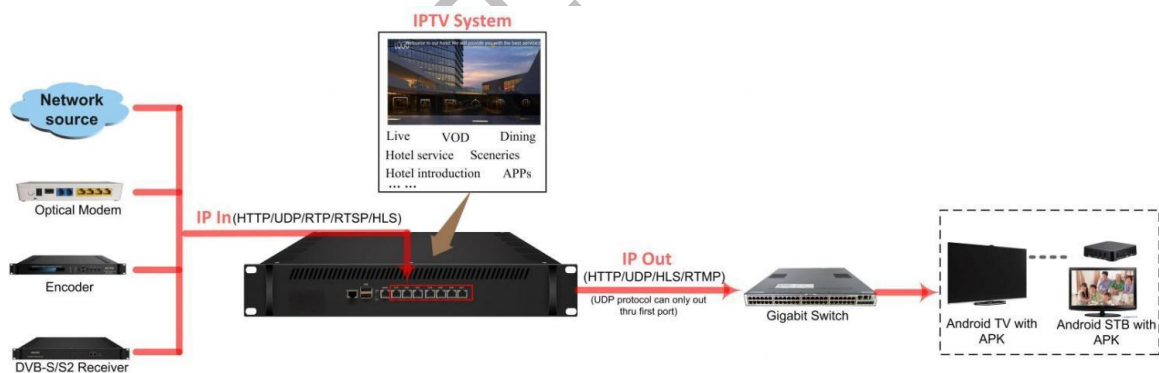

Specifications

IP Input	DATA CH 1-7 (1000M) ports: IP input over SRT, HTTP, UDP (SPTS), RTP (SPTS), RTSP (over UDP, payload: mpeg TS) and HLS	DATA CH 1-7 (1000M) ports: IP input over SRT, HTTP, UDP (SPTS), RTP (SPTS), RTSP (over UDP, payload: mpeg TS) and HLS
IP Input	TS files uploading through Web management	TS files uploading through Web management
IP output	First Data port (1000M): IP out over SRT, HTTP (Unicast), UDP (SPTS, Multicast) HLS and RTMP (Program source should be H.264 and AAC encoding)	First Data port (1000M): IP out over SRT, HTTP (Unicast), UDP (SPTS, Multicast) HLS and RTMP (Program source should be H.264 and AAC encoding)

IP output	DATA CH 1-7 (1000M) ports: IP out over HTTP/HLS/RTMP (Unicast) SFP+ output 10000M (for FU-4619S-I and FU-4619I)	DATA CH 1-7 (1000M) ports: IP out over HTTP/HLS/RTMP (Unicast) SFP+ output 10000M (for FU-4619S-I and FU-4619I)
System	Channel switching time with FMUSER' STB: HTTP (1-3s), HLS (0.4-0.7s)	Channel switching time with FMUSER' STB: HTTP (1-3s), HLS (0.4-0.7s)
System	Play programs with APK downloaded android STB and TV	Play programs with APK downloaded android STB and TV
System	About 80 HD/SD programs (Bitrate at 2Mbps) when HTTP/RTP/RTSP/HLS is converted into UDP (Multicast), the actual application shall prevail, and suggest maximum 80% CPU utilization	About 80 HD/SD programs (Bitrate at 2Mbps) when HTTP/RTP/RTSP/HLS is converted into UDP (Multicast), the actual application shall prevail, and suggest maximum 80% CPU utilization
System	IPTV system function	support Live channel, VOD, Hotel introduction, Dining, Hotel service, APPS, scenery introduction and so on (Please install FMUSER IPTV APK)
System	IPTV system main interface	support adding scrolling caption, welcome words, pictures, advertisement, video, music (Please install FMUSER IPTV APK)
System	web-based NMS management thru DATA port	web-based NMS management thru DATA port
General	Demission	482.6mm×328mm×88mm (W×L×H)
General	Temperature	0~45■(operation), -20~80■(storage)
General	Power Supply	AC100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz

Test data for reference:

Protocol Conversion	Programs	Bitrate	Terminals	Terminals	CPU Utilization
---------------------	----------	---------	-----------	-----------	-----------------

Protocol Conv ersion	Programs	Bitrate	FU-4619S-M	FU-4619I	CPU Utilization
HTTP/RTP/R TSP/HLS to UDP	80	2M	---	---	55%
HTTP to HTTP	30	2M	300	600	80%
HTTP to HTTP	50	2M	160	320	80%
HTTP to HLS	50	2M	400	800	46%
UDP to HLS	50	2M	400	800	50%
UDP to HLS	80	2M	300	600	72%
UDP to HTTP	50	2M	240	480	50%
UDP to SRT	50	2M	---	---	50%
UDP to SRT	50	2M	---	---	75%

Order Guide:

Model No.	Feature	SFP+	Memory	CPU	Solid-State Disk (SSD)	Mechanical Hard Disk
FU-4619F-M	Gateway+I PTV server	/	8G	i5/i7 (3rd G eneration)	120G/240G random	/
FU-4619S-M	Gateway+I PTV server	/	8G	i5/i7 (3rd G eneration)	120G/240G random	4T
FU-4619S-I	Gateway+I PTV server	1	8G	i3 (6th Gen eration)	120G/240G random	/
FU-4619I	Gateway+I PTV server	1	16G	i7 (6th Gen eration)	120G/240G random	4T

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227