

FMUSER FUQ-8323 DVB-T Transmitter 1-Channel 470-806MHz Input Output DVB-T MFN-SFN Support AGC Stabilization Rack-Mount Broadcast Transmission Product overview



The FMUSER FUQ-8323 is a DVB-T digital transmitter delivering scalable 1500W–3000W RF output via 470–806MHz with high-gain LDMOS amplifiers. It processes DVB-T signals with AGC stabilization and supports MFN/SFN networks in a compact rack-mountable chassis. Designed for 24/7 unmanned operation, it features digital front-panel control and multi-stage lightning protection. Ideal for terrestrial TV broadcasting, SFN network deployment, and emergency backup transmission in harsh environments.

Key feature


Robust Design: Rack-mountable chassis built for 24/7 unmanned operation

Technical Specifications

Input	System standard	DVB-(T)
Input	frequency	470MHz~806MHz
Input	Input Level	-20 dBm±3dB (87dbuv ±3dB)
Input	Input reflection loss	≥15dB
Input	Input Interface	‘N’
Output	RF output power	1500W/2000W/2500W/3000W optional
Output	Output frequency	470MHz~806MHz (For Single Channel: Every 8M available; For Broadband Channel: consecutive 60M available)
Output	Output impedance	50Ω

Output	frequency response	$\pm 0.5\text{dB}$
Output	Shoulder level	$\geq 36\text{dB}$ @central frequency $\text{IF} \pm 4.2\text{MHz}$
Output	MER	$\geq 33\text{dB}$
Output	output reflection loss	$\geq 20\text{dB}$
Output	variation of output power	$\pm 0.25\text{dB}$
Output	In-band stray	$\leq -60\text{dBc}$
Output	Out-of-band suppression	$\geq 65\text{dBc}$
Output	Output interface	1-5/8
General Parameters	Working temperature	$-20 \sim +50^\circ\text{C}$
General Parameters	Storage temperature	$-30 \sim +75^\circ\text{C}$
General Parameters	Relatively humidity	$\leq 95\%$ (25°C no condensation)
General Parameters	Cooling mode	inside cooling fan
General Parameters	atm press	86~106kPa
General Parameters	power supply	AC, $220\text{V} \pm 10\%/50\text{Hz}$
General Parameters	Machine room requirement	less dust, no shake
General Parameters	Dimension(L×W×H)	1050mm×600mm×1695mm

System Diagram

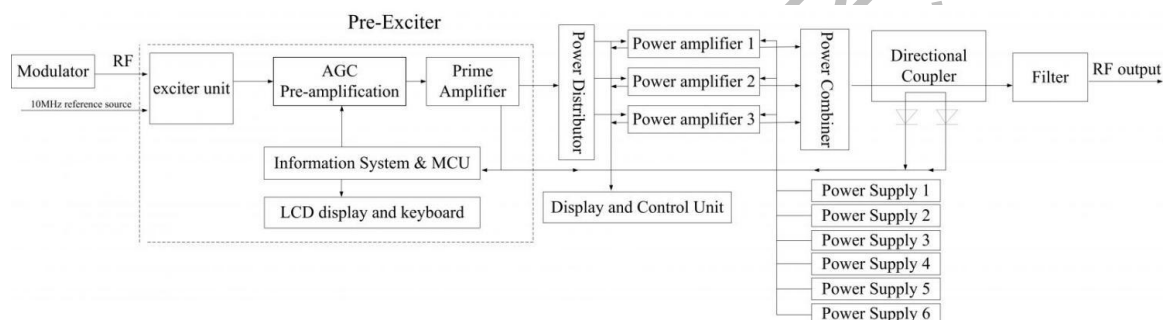

PS: This diagram is a reference for 1500W and 2000W transmitter. For 2500W and 3000W transmitter, there are 4 power amplifiers and 8 power supplier included.

Main Components List

S/N	Component Name	Specs	Qty	Remarks
-----	----------------	-------	-----	---------

	Final Power Amplifier	800W	3 pcs	For 2000W
	Final Power Amplifier	800W	4 pcs	For 3000W
	Final Power Amplifier	2000W and 3000W are standard power, 1500W and 2500W are customized version	2000W and 3000W are standard power, 1500W and 2500W are customized version	2000W and 3000W are standard power, 1500W and 2500W are customized version
	Pre-Exciter		1 pc	
	Monitor Unit		1 pc	With LCD monitor on front door
	Power Supply for Final Amplifier		6 pcs	For 1500W/2000W
	Power Supply for Final Amplifier		8 pcs	For 2500W/3000W
	Filter		1 pc	As per order. (In case multiple single-channel transmitters are involved, a power combiner is required.)
	Cabinet		1 pc	
	Cooling Fan		1 set	2 sets (with 1 set for backup) optional as order or needed
Accessories	Accessories	Accessories	Accessories	Accessories
	Hard Feeder	Φ40, 2 meter long	1	These parts are standard configuration. If there are special requirement, please indicate when place order.

	Elbow		3	These parts are standard configuration. If there are special requirement, please indicate when place order.
	Hoop		3	These parts are standard configuration. If there are special requirement, please indicate when place order.
	Hose Clamp		13	These parts are standard configuration. If there are special requirement, please indicate when place order.
	Central Pin		3	These parts are standard configuration. If there are special requirement, please indicate when place order.
	Flange	Φ40	1	These parts are standard configuration. If there are special requirement, please indicate when place order.
	antenna		1	As per order
	Feeder			As per order
	Combiner		1	As per order

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227