
A0 Research Poster: Layout Guide

Calbayog Cultural Convention Center thesis · A0 portrait (841 × 1189 mm) · two columns · map drawn at 1:6 (multiply any measurement on the map by 6)

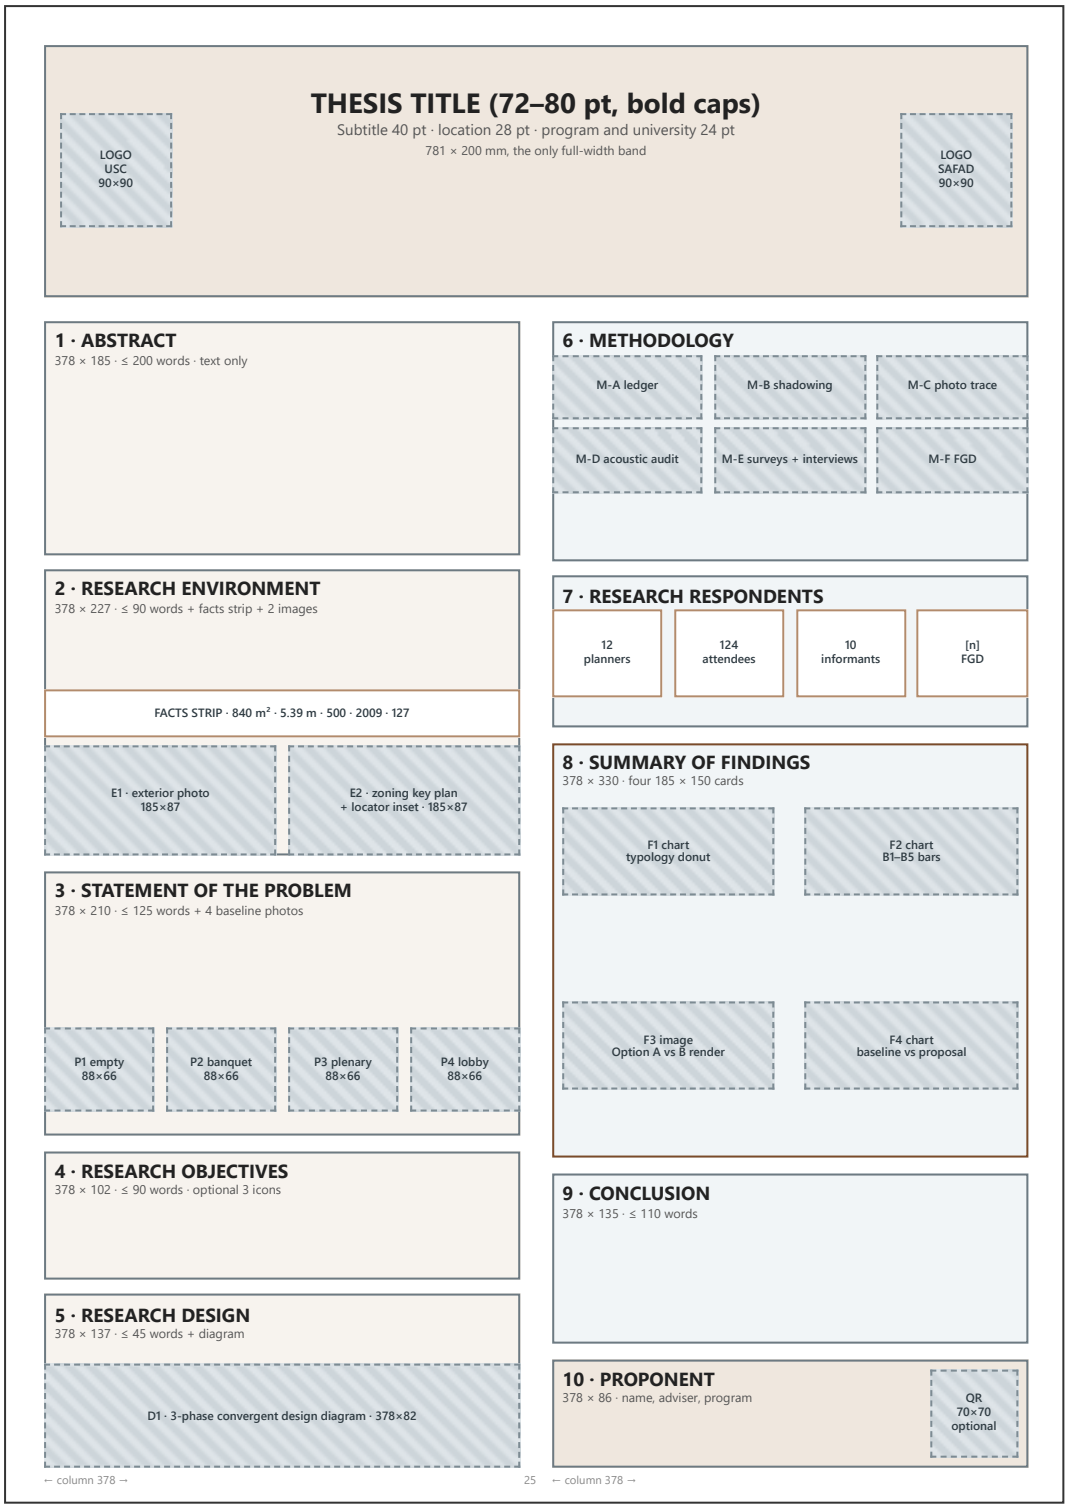

Grid

Sheet 841 × 1189 mm · margins 30 mm

2 columns × 378 mm · gutter 25 mm

Header 200 mm · 20 mm to columns · 12 mm between blocks

Key

Left: why, and how it was designed

Right: how data was gathered, results

Photo, diagram or chart slot

Big number, small label

Reading order

Title, then 1 → 5 down the left and 6 → 10 down the right. Design (5) leads into Methods (6) across the gutter. Findings (8), Conclusion (9) and Proponent (10) fill the lower right; Findings gets the heavy border.

Type sizes

Title 72–80 pt bold · subtitle 40 pt

Section heads 44 pt · body 24 pt

Finding cards 20 pt · big numbers 90–120 pt

Captions 18 pt minimum

Block specification

Positions are in A0 millimetres from the top-left corner of the sheet. Word budgets assume 24 pt body text (≈14 words per line, ≈125 words per 100 mm of text height in a 378 mm column).

#	Block	x, y	w × h	Text budget	Slots (w × h mm)	Source
H	Title band	30, 30	781 × 200	Title, subtitle, location, program	2 logos 90 × 90	00_title.md
1	Abstract	30, 250	378 × 185	≤ 200 words	none	New; real survey data
2	Research Environment	30, 447	378 × 227	≤ 90 words	Facts strip 378 × 38; E1 photo 185 × 87; E2 key plan 185 × 87	31_Research environment.md; Ch. 4 §4.1.1
3	Statement of the Problem	30, 686	378 × 210	≤ 125 words	P1–P4 photos 88 × 66, 18 pt captions	Ch. 1
4	Research Objectives	30, 908	378 × 102	≤ 90 words	Optional icons 20 × 20	Ch. 1
5	Research Design	30, 1022	378 × 137	≤ 45 words	D1 diagram 378 × 82	30_Research Design.md
6	Methodology	433, 250	378 × 190	6 tiles × ≤ 14 words + ≤ 55 words	6 tiles 120 × 52 (icon + label)	Ch. 3; Ch. 4
7	Research Respondents	433, 452	378 × 120	4 tiles + 1 line	4 number tiles 88 × 70	32_Respondents.md; survey exports
8	Summary of Findings	433, 584	378 × 330	4 cards × ≤ 30 words at 20 pt	4 cards 185 × 150, each with a 169 × 70 chart or image	Appendix A; Ch. 4; survey exports
9	Conclusion	433, 926	378 × 135	≤ 110 words	none	Ch. 5 §5.2
10	Proponent	433, 1073	378 × 86	3–4 lines	Optional QR 70 × 70	Consent forms

Image and diagram checklist

Slot	What to place	Minimum pixels (150 dpi)
E1	Exterior or entrance photo of the convention center	1,100 × 520
E2	Floor plan with Zones 1–4 shaded (Lobby, Main Hall, Stage, back-of-house hatched as "context only"), north arrow, small Samar → Calbayog locator inset in one corner	vector preferred
P1–P4	Your baseline photos: empty hall, banquet, plenary, lobby exhibition	520 × 390 each
D1	Research design flow (sketch on page 4)	vector
M-A…F	One simple line icon per protocol (book, eye, camera, sound wave, clipboard, people)	vector
F1	Donut: Plenary 62, Classroom 32, Banquet 17, Exhibition 16 (N = 127)	vector
F2	Horizontal bars, attendee ratings B1–B5 (data on page 5), with a reference line at 3.0 (neutral)	vector
F3	Option A vs Option B render pair of the same scenario, or a plan pair	1,000 × 410
F4	Paired bars: attendee baseline 2.54 vs proposal endorsement 4.42 (same 1–5 scale)	vector
QR	Optional link to the walkthrough video or digital thesis	print ≥ 60 mm

At A0 a 185 mm-wide photo needs about 1,100 px at 150 dpi; 300 dpi (≈2,200 px) is safer for renders.

Copy: header and left column

H · Title band

SPATIAL UTILIZATION ANALYSIS AND EVIDENCE-BASED INTERIOR DESIGN INTERVENTIONS FOR THE CALBAYOG CULTURAL CONVENTION CENTER

Optimizing Spatial Adaptability and Samar Heritage Integration for Flexible Event Environments

Hinay-la St., Brgy. Capoocan, Calbayog City, Samar

Bachelor of Science in Interior Design · Department of Fine Arts & Design, SAFAD · University of San Carlos

1 · Abstract (≈195 words)

The Calbayog Cultural Convention Center is the city's primary air-conditioned civic hall, yet its 840 m^2 interior (711 m^2 Main Hall and 129 m^2 Lobby) is unzoned and acoustically live, and changing between setups takes 4 to 12 or more hours. This Applied Design Research study analyzed how the venue is used and developed non-structural, evidence-based interior design interventions for it. A convergent parallel mixed-methods design combined a 127-event archival ledger (2014–2026), live shadowing of five events, acoustic and envelope audits, surveys of 12 event planners and 124 attendees, and interviews with 10 key informants. Four layout typologies emerged: Plenary (48.8%), Classroom (25.2%), Banquet (13.4%) and Exhibition (12.6%). Attendees rated the existing hall deficient ($\bar{x}$ = 2.54 of 5), with thermal comfort lowest ($\bar{x}$ = 2.17), and the empty hall measured a reverberation time of 2.53 s against a 0.80–1.10 s target for speech. The resulting framework pairs twelve scaled layout templates with a demountable modular stage, an overhead rigging track, mobile furniture, and acoustic finishes abstracted from Basey *banig*, *tikog*, Calbayog's waterfalls and the Hadang Festival. Attendees endorsed the proposals ($\bar{x}$ = 4.42), and [FGD validation result] .

2 · Research Environment (≈90 words)

Converted from a municipal bus station and inaugurated on December 14, 2009, the Calbayog Cultural Convention Center in Brgy. Capoocan is the city's only affordable, fully air-conditioned, mid-sized civic hall. The Sports Center serves arena-scale crowds and the Handumanan Museum holds permanent collections; the convention center hosts the assemblies, trainings, banquets and cultural showcases in between. The study covers its 840 m^2 interior: the Lobby (Zone 1, 129 m^2), the column-free Main Hall (Zone 2, 711 m^2) and the fixed concrete stage (Zone 3, 52.5 m^2). Back-of-house (Zone 4) is context only.

Facts strip (big number 90 pt, label 20 pt):

840 m^2	**5.39 m**	**500**	**2009**	**127**
interior floor area 711 hall + 129 lobby	ceiling height 6.20 m to truss chord	max occupants plenary, code limit	opened as convention center former bus station	recorded events 2014–2026

3 · Statement of the Problem (≈120 words)

This study identified the venue's event typologies, analyzed their spatial patterns, and developed evidence-based interior interventions to improve spatial versatility, setup turnaround and cultural identity. It asked:

1. What are the baseline operating conditions and indoor environmental quality (IEQ) of the Main Hall and Lobby, in terms of (1.1) attendee satisfaction with lighting, acoustics and thermal comfort, and (1.2) the setup bottlenecks planners and staff face?
2. What spatial typologies emerge from the venue's event history and live observation, and which layout interventions best improve their furniture setup, circulation and turnaround?
3. How can the interior balance multi-event adaptability with Samar-Calbayog identity, through (3.1) ceiling tracks, acoustic assemblies and materials, and (3.2) surface treatments drawn from *banig*, *tikog*, Calbayog's waterfalls and the Hadang Festival?

Photo captions (18 pt, one line each): P1 Empty hall: hard surfaces, fixed stage, 2.53 s echo

P2 Banquet: caterers crowd the walls, no pantry

P3 Plenary: loose rows, one aisle, uneven sound

P4 Lobby exhibition: no aircon, one 1.0 m door leaf

4 · Research Objectives (≈85 words)

1. Evaluate the baseline IEQ and spatial conditions of the Main Hall and Lobby: (1.1) attendee satisfaction with lighting, speech clarity and thermal comfort; (1.2) layout bottlenecks and turnaround delays.
2. Identify the venue's spatial typologies and formulate layouts that improve furniture mobility, circulation clearance and turnaround speed.
3. Propose interventions that balance adaptability with local identity: (3.1) materials, acoustic assemblies and a non-structural rigging track; (3.2) surface treatments abstracting *banig*, *tikog*, waterfalls and Hadang.


Keep the numbering identical to the Statement of the Problem so a reader can match question 2 to objective 2 at a glance.

Copy: research design and right column

5 · Research Design (≈45 words + diagram D1)

> Applied Design Research using a convergent parallel mixed-methods design. Quantitative and qualitative data were collected at the same time, merged, and translated into design. Because an unbuilt proposal cannot undergo post-occupancy evaluation, a stakeholder focus group discussion (FGD) tested the design instead.

D1 sketch (draw left to right, 378 × 82 mm):

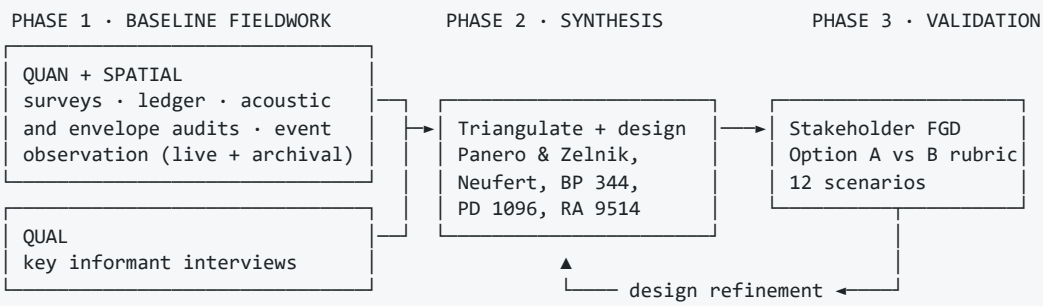

6 · Methodology

Six tiles (bold label 22 pt, line 18 pt):

Tile	Label	Line
M-A	Archival ledger	127 events, 2014–2026 → typologies and capacity tiers
M-B	Live event shadowing	5 events, Oct 2026 → setup, in-session, teardown
M-C	Archival photo trace	Furniture arrays, floor cables, blocked doors
M-D	Envelope and acoustic audit	Sound level meter, pink-noise decay (ISO 3382-2)
M-E	Surveys and interviews	Form A planners, Form B attendees (5-point scale); 10 interviews
M-F	Evaluative FGD	Design rubric, Option A vs B, 12 scenarios

> **Analysis.** Survey items were summarized as weighted means and standard deviations; interviews were coded with Braun and Clarke's (2006) thematic analysis; ledger records were classified and cross-tabulated by typology and capacity tier. All strands were checked against anthropometric standards (Panero & Zelnik; Neufert) and building, fire and accessibility codes (PD 1096, RA 9514, BP 344).

7 · Research Respondents

12	124	10	[n]
event planners and operators Form A · purposive expert sampling	event attendees Form B · purposive quota sampling	key informants 5 planners/operators, 5 attendees/performers	FGD panelists planners, venue staff, attendees, cultural officer

> All respondents were 18 or older and had organized or attended at least one event at the venue in the past five years.

8 · Summary of Findings **(four cards: heading 24 pt, big number 90 pt, text 20 pt)**

1 · How the hall is used (SOP 2)

127 events

Plenary 48.8% · Classroom 25.2% · Banquet 13.4% · Exhibition 12.6%. Bookings cluster at both ends: 400–500 pax (37.8%) and 50–120 pax (28.3%).

F1: typology donut; tier split as a thin bar beneath.

2 · What isn't working (SOP 1)

2.54 / 5 attendee rating of the existing hall

Thermal comfort lowest (2.17). Empty-hall echo 2.53 s vs a 0.80–1.10 s target. 10 of 12 planners need 4+ hours to set up.

F2: B1–B5 bars with a line at 3.0.

3 · The design response (SOP 2–3)

12 layouts

4 typologies × 3 scales. A demountable stage frees 52.5 m^2 for flat-floor events; overhead rigging replaces floor trusses; heritage acoustic finishes cut modeled echo to 0.92 s.

F3: Option A vs B render pair.

4 · How stakeholders responded (SOP 3)

4.42 / 5 attendee endorsement

Planners 4.25. Highest-rated item: a modern, culturally rooted interior (4.65). FGD: Option B $\bar{x}$ vs Option A $\bar{x}$.

F4: paired bars, 2.54 vs 4.42.

9 · Conclusion **(≈105 words)**

1. **The bottlenecks are spatial, not staff failures.** Hard finishes, heavy loose furniture, missing storage and rigging, and a fixed stage drive the 4- to 12-hour turnarounds.
2. **The hall does not need structural work.** A non-structural overlay of layout templates, a demountable stage, mobile furniture and an overhead rigging track can bring turnaround under 90 minutes (projected), clear blocked exits and end wall damage.
3. **Cultural identity and event flexibility can coexist.** Heritage motifs abstracted into fire-rated acoustic finishes absorb sound and build civic pride at the same time.

10 · Proponent

Trina Jane Misagal · Proponent

IDr. Kirah Angeline Lampinez · Thesis Adviser

BS Interior Design · Department of Fine Arts & Design · SAFAD · University of San Carlos, Talamban Campus · 2026

Leave out phone numbers and email. Add a middle initial if you use one formally.

Chart data

F1 · Event typologies (Appendix A, N = 127)

Typology	f	%
Plenary / Theatrical	62	48.8
Classroom / Training	32	25.2
Banquet / Social	17	13.4
Exhibition / Trade	16	12.6

F1 · Capacity tiers (Table 4.1b)

Tier	f	%
1 · 50–120 pax	36	28.3
2 · 150–250 pax	19	15.0
3 · 250–350 pax	24	18.9
4 · 400–500 pax	48	37.8

Acoustics (Table 4.8b; Ch. 4 Option B)

Condition	RT60
Existing empty hall (measured)	2.53 s
Speech target	0.80–1.10 s
Option B (modeled)	0.92 s

F2 · Attendee baseline ratings (Form B export, N = 124)

Item	Mean
B1 Acoustics / speech clarity	2.69
B2 Lighting	2.77
B3 Thermal comfort	2.17
B4 Stage and screen view	2.54
B5 Layout, aisles, legroom	2.51
Baseline composite (SD 0.99)	**2.54**

F4 · Endorsement of proposals (1–5 scale)

Cluster	Attendees (124)	Planners (12)
C Spatial modularity	4.37	4.12
D Samar heritage	4.42	4.10
E Technical integration	4.40	4.43
F Inclusivity, longevity	4.51	4.33
Composite C–F	**4.42**	**4.25**

Planner setup time (Form A export, n = 12)

< 4 h	4–8 h	8–12 h	> 12 h
2	4	3	3

Planner B items ask whether a problem exists (high = worse); attendee B items ask about satisfaction (high = better). Don't plot the two baselines on the same chart.

Before you print

1 · Attendee survey numbers differ from the manuscript. This guide uses your Google Forms export (*SURVEY/Event Attendees Survey Questionnaire (Responses).xlsx*, 124 responses). Ch. 3–5 report N = 100 and means (2.44, 2.08, 4.50 …) that match *form_b_survey_responses_n100.csv* exactly, which is a generated dataset (see *form_b_survey_simulation_guidelines_and_prompt.md*). The poster and the manuscript must agree before the defense, so Ch. 3–5 need to be updated to the real export.

2 · FGD results are left blank on purpose. The FGD transcript and Google Form results in *Transcript/* were generated in an earlier AI session, so the Option A vs B means (4.62 vs 3.06) and panel size are not printed. Fill the pink slots from the real FGD rubric responses. If the FGD has not happened yet, write "FGD validation in progress" or drop that clause.

3 · Planner survey. The export has 12 responses, and the 83% (10 of 12 at 4+ hours) and rigging item (4.42) match Ch. 4. Four of the 12 were submitted from your own email accounts; be ready to explain how they were collected (for example, paper forms you encoded).

Check	Detail
Measured vs modeled	2.53 s is measured; 0.92 s is modeled; "under 90 minutes" is projected. Keep those words on the poster.
Opening year	2009 follows Ch. 4 §4.1.1. *FGD participants.md* still says 2014.
Pink slots	Abstract last clause; respondents tile 4; finding card 4.
Export	A0 at 100%, fonts embedded, photos ≥ 150 dpi at final size, 3 mm bleed only if the background runs to the edge.
Distance test	Print one block at full size and read it from 2 m before printing the whole sheet.