
G0 / Real SAM 2.1 initialization and Cutie propagation on CPU


Authored test selection box / not inferred



Actual SAM seed mask / 0.853 s

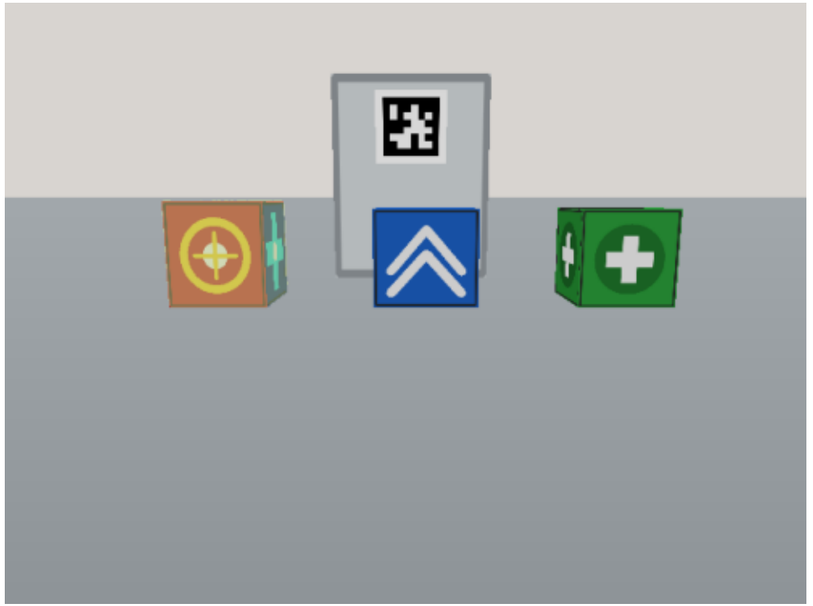


Actual Cutie output / frame 12

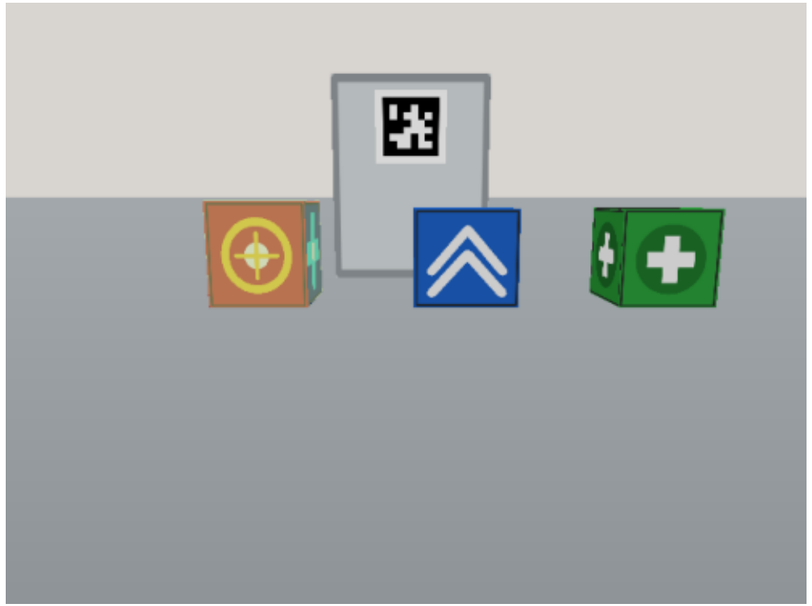


Synthetic pinhole-renderer inputs; manually authored test box. Green is actual model mask output. No evaluator truth enters inference. The SAM score selects the initial mask, not physical identity. This is a component replay, not a phone interaction, live camera or robot demo.

G0 / Every recorded output from the 12-frame CPU probe


Frame 1 / Cutie step 202 ms

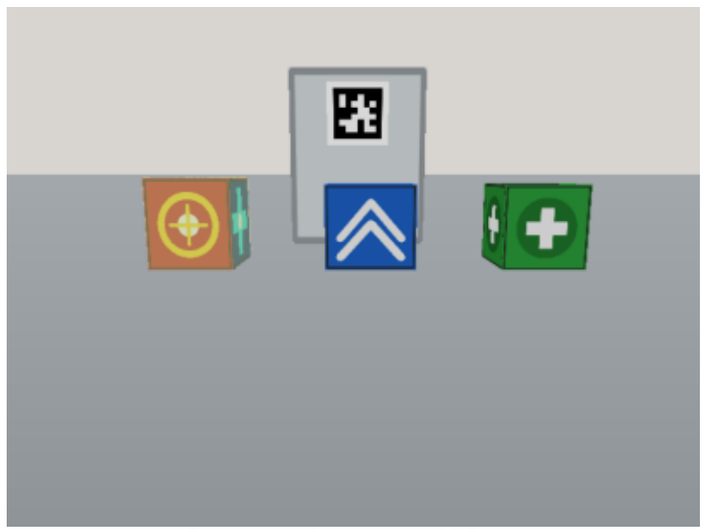


Frame 2 / Cutie step 224 ms

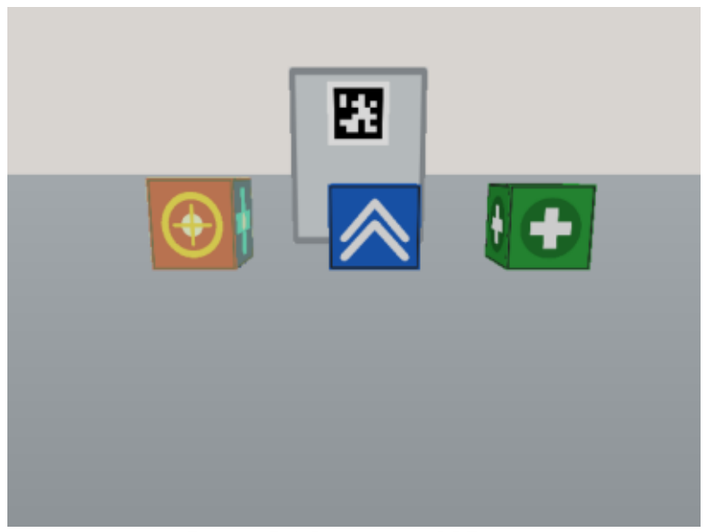


Frame 3 / Cutie step 267 ms

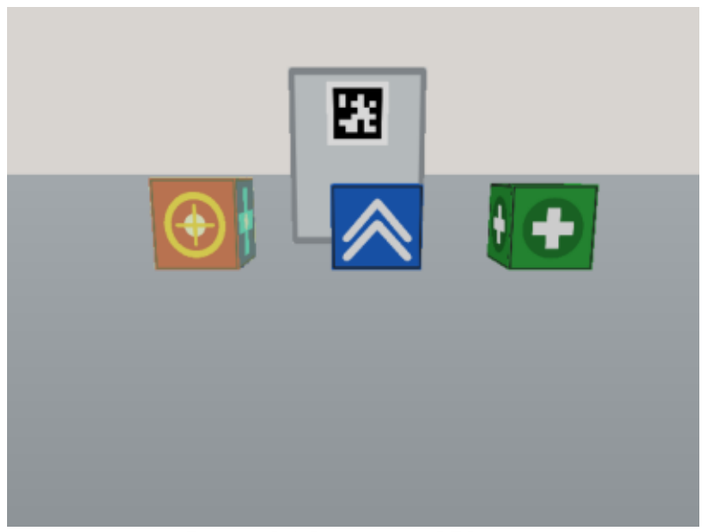


Frame 4 / Cutie step 227 ms

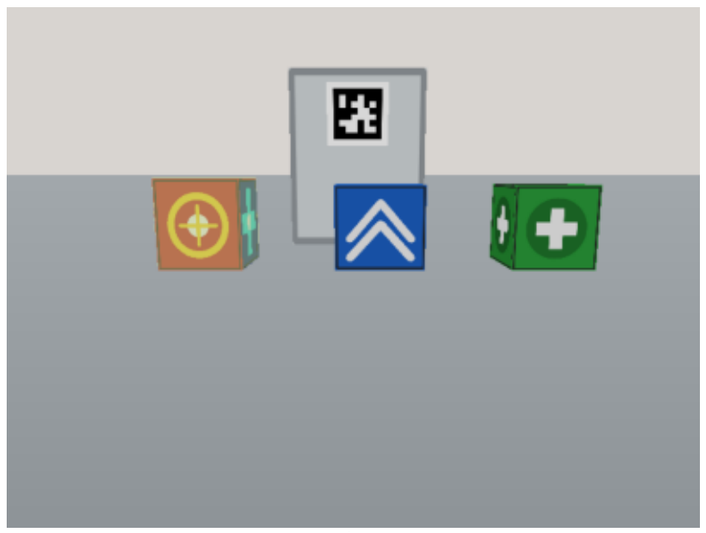


Frame 5 / Cutie step 237 ms

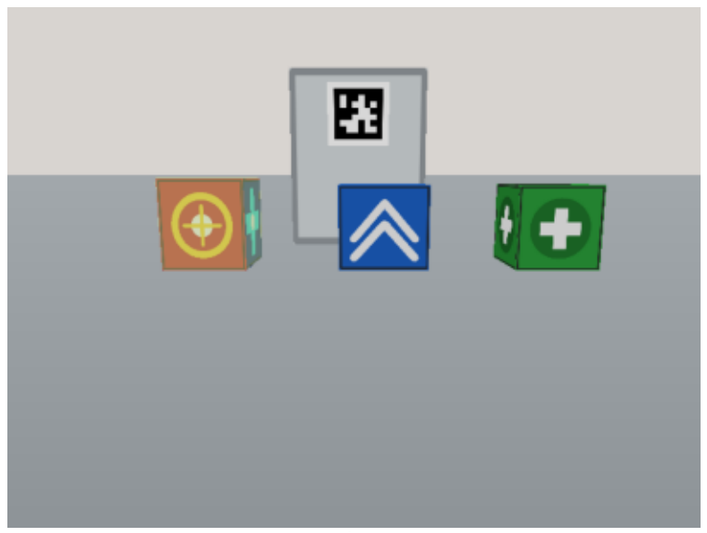

Frame 6 / Cutie step 272 ms

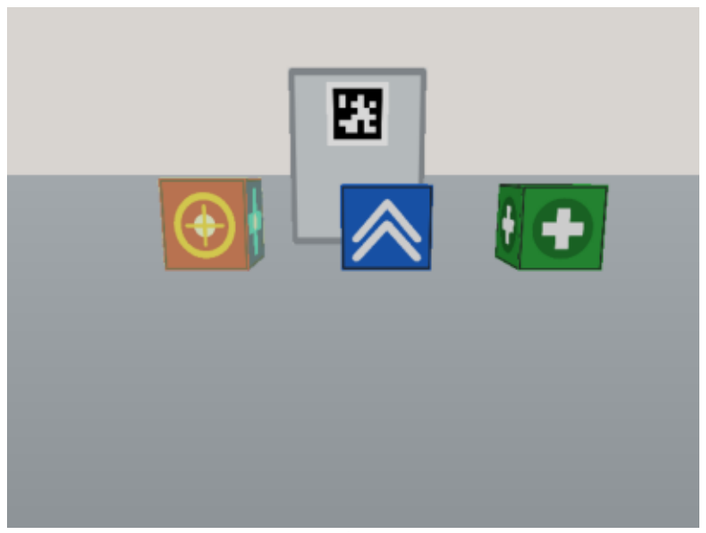


Frame 7 / Cutie step 212 ms

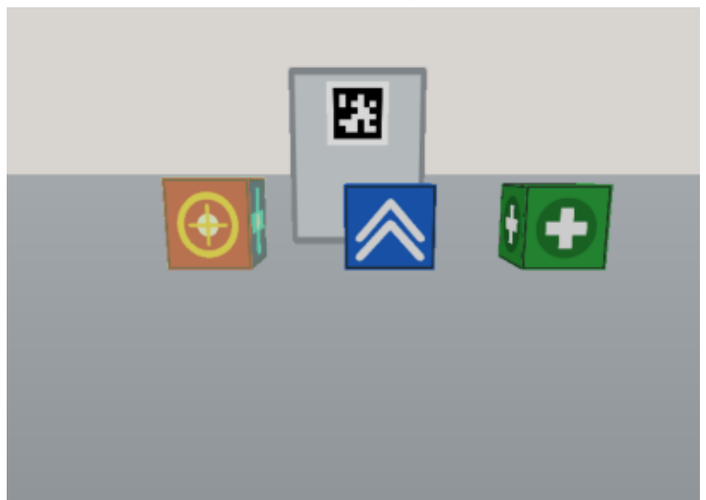


Frame 8 / Cutie step 259 ms




Frame 9 / Cutie step 289 ms

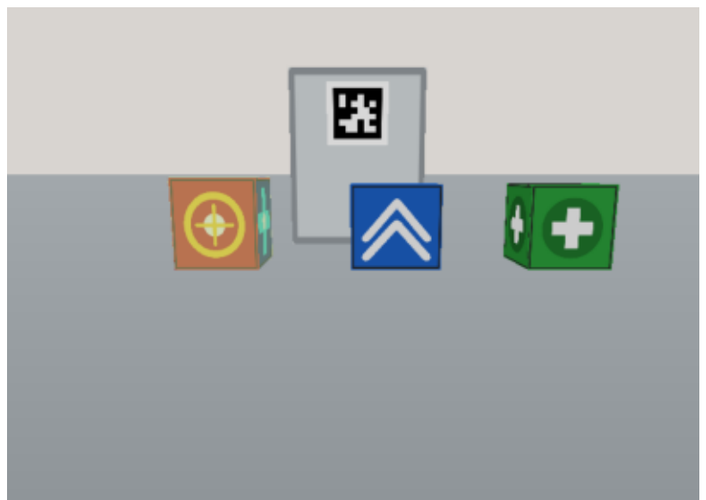


Frame 10 / Cutie step 228 ms

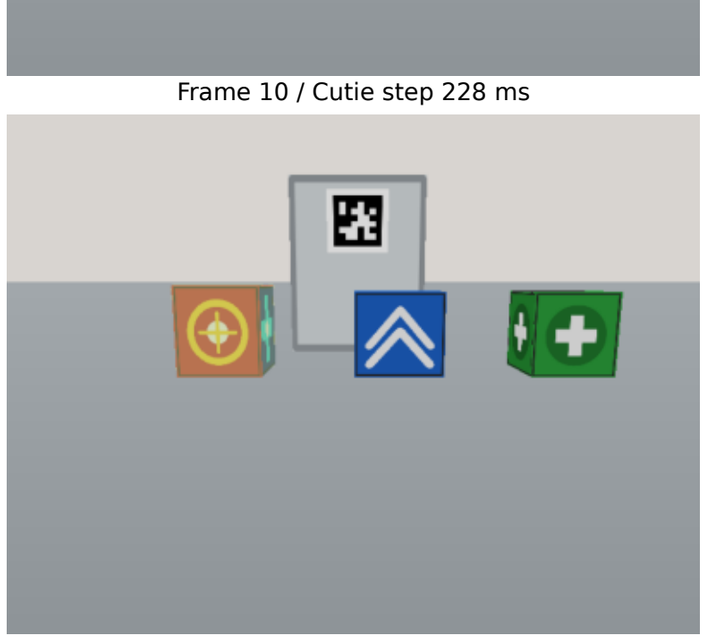

Frame 11 / Cutie step 302 ms

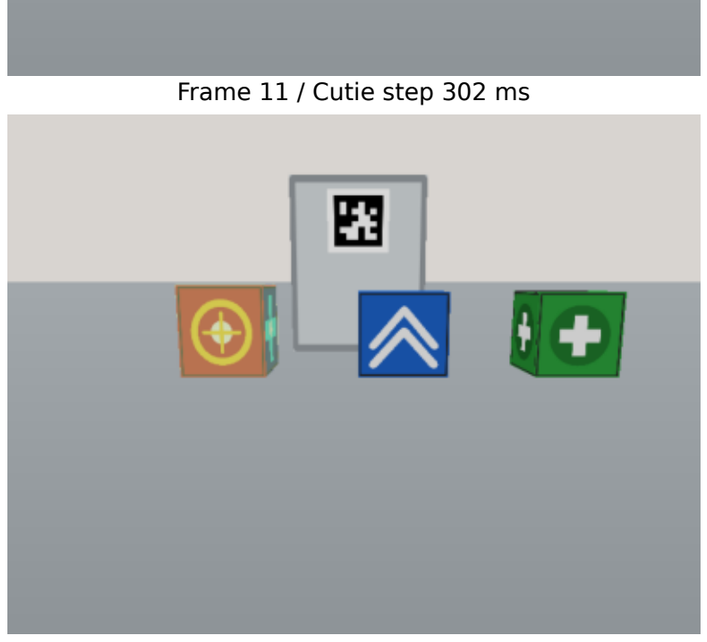



Frame 12 / Cutie step 241 ms

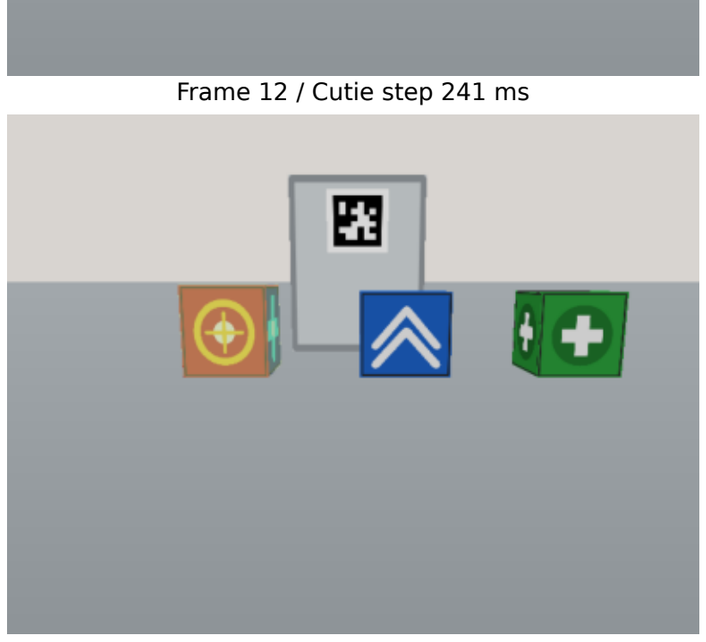

All frames in order, not a best-frame selection. Synthetic source; actual original Cutie raster masks, initialized only from the first SAM prediction. Overlay color is a display operation, not an identity label. No interpolation or manual mask correction. This small development replay does not establish long-term or real-room quality.

G0 / CPU step throughput 4.05 FPS, not end-to-end live FPS

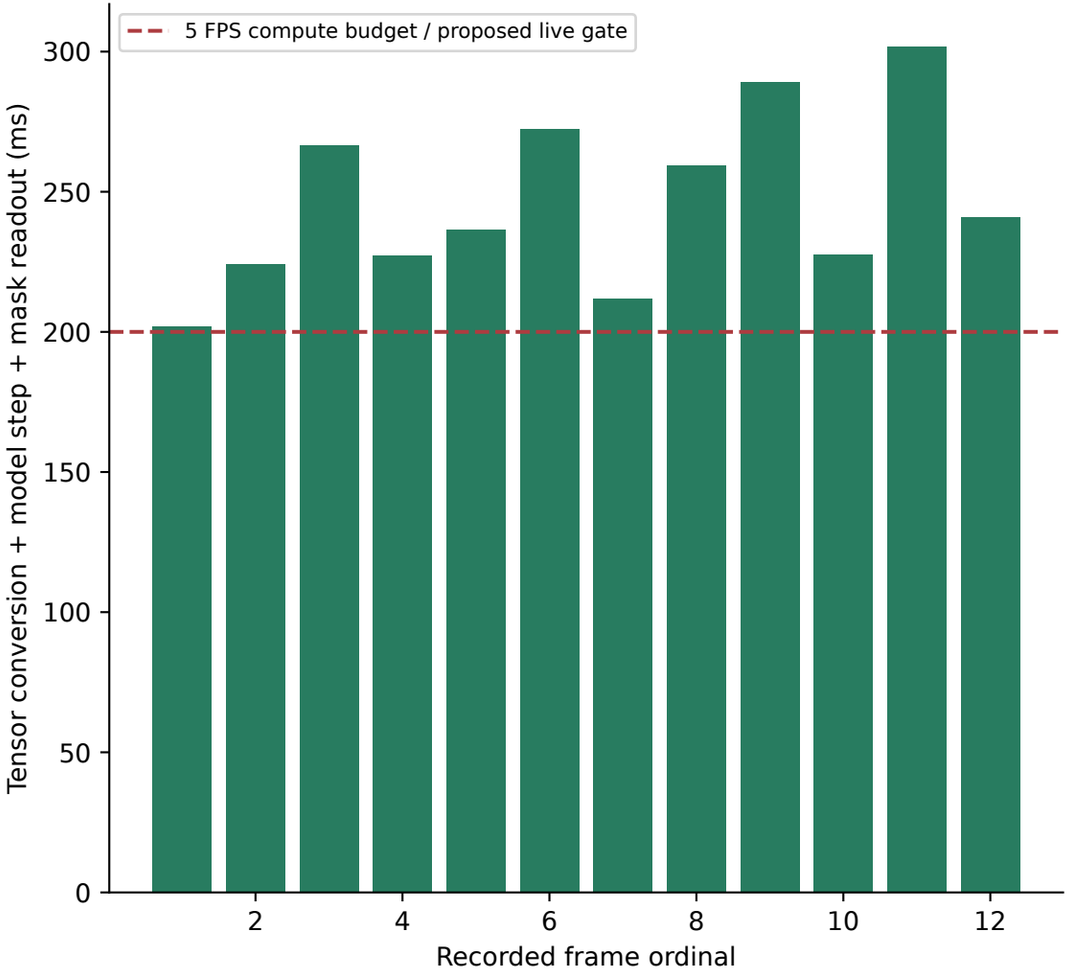

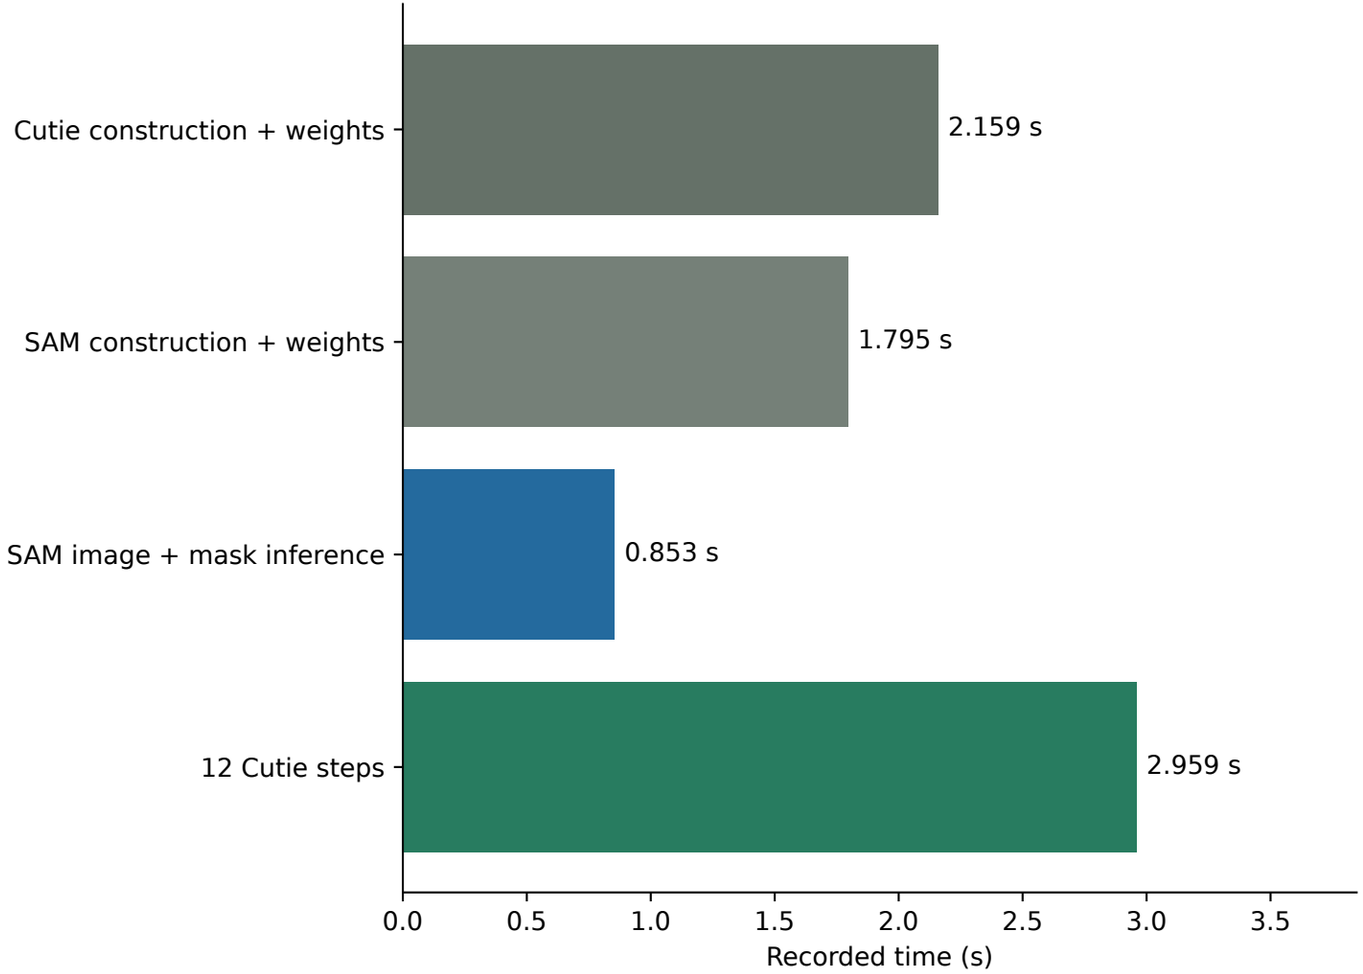

One 640x480 target, 8 CPU threads, FP32; peak process RSS 1334 MiB. Cutie mean step 0.247 s, P95 0.295 s. Source reads, output writes and browser transport/rendering are outside the step timer. The proposed 5 FPS live gate is not passed. CUDA trial failed from insufficient free VRAM; no GPU throughput is invented.