

GROUND FLOOR PLAN


SCALE 1:50

FIRST FLOOR PLAN

SCALE 1:50


DETAIL 1

TYPICAL FOOTING & PLINTH — SCALE 1:15

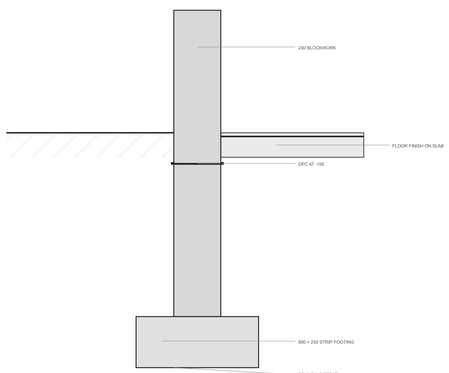


FRONT ELEVATION

SCALE 1:50

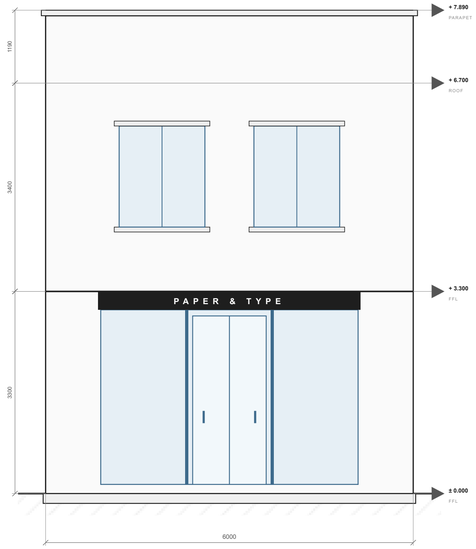

SECTION A-A

SCALE 1:50

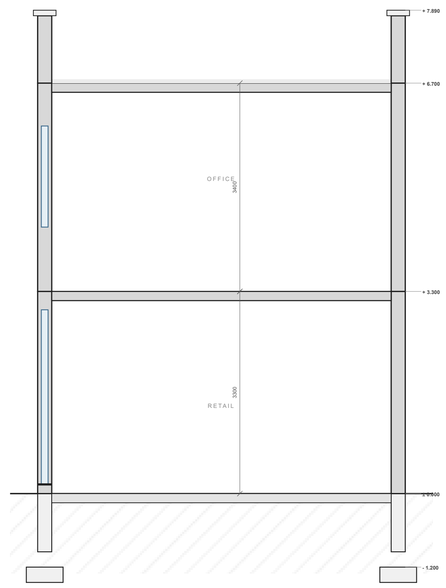

SECTION B-B

SCALE 1:75



GENERAL NOTES

1. All dimensions in millimetres. Verify on site before fabrication. Do not scale this drawing.
2. 230 mm external blockwork, 115 mm internal partitions, plastered both faces.
3. Floor-to-floor 3300. Slab 150 thick. Clear height 3150 GF / 3250 FF.
4. Strip footings 600 × 250 at 1200 below FFL, bearing capacity 150 kN/m² minimum.
5. Shopfront: 10 mm toughened glazing in powder-coated aluminium frames.
6. Roof: 150 slab, 1.80 fall, insulated, two-layer membrane, 1100 parapet.
7. Stair: straight flight 1100 wide, 15 risers at 223, goings 280, handrail both sides.

SHOP + OFFICE · G+1 — **A-101**

PROJECT: TWO-STOREY SHOP WITH OFFICE ABOVE	CLIENT: PRIVATE DEVELOPER
PLOT: 6.00 × 12.00 m · 72.00 m² PER FLOOR	LOCATION: PLOT No. —, CITY
SHEET TITLE: PLANS, ELEVATIONS & SECTIONS	STATUS: FOR CONSTRUCTION

DRAWN	CHECKED	SCALE	DATE	SHEET
AR	—	1:50 · 1:75 · 1:15	26-10-2026	1 / 1

REV A · ISSUED FOR CONSTRUCTION · ALL DIMENSIONS IN mm