# ETSI TS 152 402 V11.0.0 (2012-11)



Digital cellular telecommunications system (Phase 2+);
Telecommunication management;
Performance Management (PM);
Performance measurements - GSM
(3GPP TS 52.402 version 11.0.0 Release 11)



Reference
RTS/TSGS-0552402vb00

Keywords
GSM

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<a href="http://portal.etsi.org/tb/status/status.asp">http://portal.etsi.org/tb/status/status.asp</a></a>

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI\_support.asp

#### Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2012. All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup>, **UMTS**<sup>TM</sup> and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP**<sup>TM</sup> and **LTE**<sup>TM</sup> are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**GSM**® and the GSM logo are Trade Marks registered and owned by the GSM Association.

# Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://ipr.etsi.org).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## **Foreword**

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <a href="http://webapp.etsi.org/key/queryform.asp">http://webapp.etsi.org/key/queryform.asp</a>.

# Contents

Intelle	ectual Property Rights	2
Forew	/ord	2
Forew	/ord	17
Introd	luction	17
1	Scope	18
2	References	18
3	Abbreviations	20
4	Detailed description of the measurement system for a GSM PLMN	22
4.1	Introduction	
4.1.1	Basic measurement system functions	
4.1.2	Measurement Object Administration	
4.2	Modelling of measurement jobs	
4.2.1	Measurement job characteristics	
4.2.1.1	· ·	
4.2.1.2		
4.2.1.3		
4.2.1.4	7 1	
4.2.2	Scanner state and status attributes	
4.2.3	Scanner administration	
4.3	Modelling of measurement results	
4.3.1	Characteristics of the result report	
4.3.2	Result report transfer control	
4.4	Conformance requirements	
4.4.1	Simple scanner	
4.4.2	Scan report record	
4.4.3	Scan report notification	
4.4.4	Activate scan report action	
4.5	Application Context	
Anne	x A (informative): Graphical examples	31
Anne	x B (normative): Performance Measurement Requirements Summary	
	Measurements Related to the BSC	
B.1.1		
	1 Unsuccessful requests for service	
B.1.1.2		
B.1.1.3		
B.1.1.4	· /	
B.1.1.5		
B.1.1.6		35
B.1.1.7		
B.1.1.8	/ <b>1</b>	
B.1.1.9		
B.1.1.3		
B.1.1.1	±	
в.1.1.1 В.1.1.1	ı	
B.1.1.1		
в.1.1.1 В.1.1.1	* <b>1</b>	
в.1.1.1 В.1.1.1	4	
в.1.1.1 В.1.1.1		
в.1.1.1 В.1.1.1		
в.1.1.1 В.1.1.1		
	TO ENGLIDAD OF OUR OF WORTHING DANCE FLOOR	

B.2	Measurements related to the BTS	40
B.2.1	CELL Measurement Function	40
B.2.1.1		40
B.2.1.2	Attempted Transmission of Paging Messages (the PCH)	40
B.2.1.3		
B.2.1.4		
B.2.1.5	•	
B.2.1.6		
B.2.1.7	<u>.</u>	
B.2.1.8	•	
B.2.1.9		
B.2.1.1		
B.2.1.1	· · · · · · · · · · · · · · · · · · ·	
B.2.1.1	· · · · · · · · · · · · · · · · · · ·	
B.2.1.1	· · · · · · · · · · · · · · · · · · ·	
B.2.1.1	· · · · · · · · · · · · · · · · · · ·	
B.2.1.1		
B.2.1.1	- I	
B.2.1.1		
B.2.1.1		
B.2.1.1		
B.2.1.2	$m{eta}$	
B.2.1.2		
B.2.1.2	=	
B.2.1.2		
B.2.1.2	r	
B.2.1.2		49
B.2.1.2	T I	
B.2.1.3	Successful Internal Handovers, intra-CELL	49
B.2.1.3	Unsuccessful Internal Handovers, intra-CELL	50
B.2.1.3	2 Attempted incoming Internal inter CELL Handovers	50
B.2.1.3	Successful incoming Internal inter CELL Handovers	50
B.2.1.3		
B.2.1.4	<u>.</u>	
B.2.1.4 B.2.1.4		
B.2.1.4		
B.2.1.4	· · · · · · · · · · · · · · · · · · ·	
B.2.1.4		
B.2.1.5		58
B.2.1.5		
B.2.1.5		
B.2.1.5	•	
B.2.1.5	Number of transmitted octets of EGPRS block on RLC layer acknowledged by mobile	59
B.2.2	Internal HDO Measurement Function	60

B.2.2.1	Attempted incoming Internal inter CELL Handovers per originating CELL	
B.2.2.2	Successful incoming Internal inter CELL Handovers per originating CELL	
B.2.2.3	Attempted outgoing Internal inter CELL Handovers per target CELL	
B.2.2.4	Successful outgoing Internal inter CELL Handovers per target CELL	61
B.3 M	easurements Related to the MSC	62
B.3.1	MSC Measurement Function.	
B.3.1.1	Number of class mark updates.	
B.3.1.2	Attempted mobile originating calls	
B.3.1.3	Successful mobile originating calls	
B.3.1.4	Answered mobile originating calls	
B.3.1.5	Attempted mobile terminating calls	
B.3.1.6	Successful mobile terminating calls	
B.3.1.7	Answered mobile terminating calls	64
B.3.1.8	Attempted Mobile Emergency calls	
B.3.1.9	Successful Mobile Emergency calls	
B.3.1.10	Answered Mobile Emergency calls	
B.3.1.11	Attempted ciphering mode control procedures	
B.3.1.12	Successful ciphering mode control procedures	
B.3.1.13	Attempted interrogations of HLRs for routing	
B.3.1.14	Successful interrogations of HLR (MSRN obtained)	
B.3.1.15	Successful interrogations of HLR (call Forwarding)	
B.3.1.16	Attempted operations for mobile originating point to point SMs	
B.3.1.17	Successful operations for mobile originating point to point SMs	
B.3.1.18	Attempted operations for mobile terminating point to point SMs	
B.3.1.19	Successful operations for mobile terminating point to point SMs	
B.3.1.20	Number of transmitted check IMEI request	68
B.3.1.21	Number of white answers in MSC	
B.3.1.22	Number of grey answers in MSC	
B.3.1.23	Number of black answers in MSC	69
B.3.1.24	Number of unknown IMEI answers	
B.3.1.25	Mean time to provide the CALL SETUP service	
B.3.1.26	Mean time to provide the LOCATION UPDATING service	
B.3.1.27	Transactions on the MM-layer where subscriber was identified with TMSI	
B.3.1.28	Transactions on the MM-layer where subscriber was identified with IMSI	
B.3.1.29	Attempted TMSI re-allocations	
B.3.1.30	Successful TMSI re-allocations	
B.3.1.31	IMSI detach procedures	
B.3.1.32	IMSI attach procedures	
B.3.1.33	Attempted incoming External intra-MSC Handovers	
B.3.1.34	Successful incoming External intra-MSC Handovers	
B.3.1.35	Attempted outgoing External intra-MSC Handovers	
B.3.1.36	Successful outgoing External intra-MSC Handovers	
B.3.1.37	Attempted incoming inter-MSC Handovers	
B.3.1.38	Successful incoming inter-MSC Handovers	
B.3.1.39	Attempted outgoing inter-MSC Handovers	
B.3.1.40	Successful outgoing inter-MSC Handovers	
B.3.1.41	Attempted subsequent inter-MSC Handovers (back to MSCa)	
B.3.1.42	Successful subsequent inter-MSC Handovers (back to MSCa)	
B.3.1.43	Attempted subsequent inter-MSC Handovers (to MSCc)	
B.3.1.44 B.3.1.45	Successful subsequent inter-MSC Handovers (to MSCc)	
B.3.1.45 B.3.1.46	External Handovers External Handovers per cause	
B.3.1.40	Unsuccessful External Handovers with reconnection to old channels, per MSC	
B.3.1.47	Unsuccessful External Handovers with loss of connection, per MSC	
B.3.1.48	External HDO Measurement Function	
B.3.2.1	Attempted incoming External intra-MSC Handovers per originating CELL	
B.3.2.1	Successful incoming External intra-MSC Handovers per originating CELL	
B.3.2.2 B.3.2.3	Attempted outgoing External intra-MSC Handovers per target CELL	
B.3.2.4	Successful outgoing External intra-MSC Handovers per target CELL	
B.3.2.5	Attempted incoming inter-MSC Handovers per originating CELL	
B.3.2.6	Successful incoming inter-MSC Handovers per originating CELL	
	Secressian meeting meet made named tong per originalling CDDD	

B.3.2.7	Attempted outgoing inter-MSC Handovers per target CELL	
B.3.2.8	Successful outgoing inter-MSC Handovers per target CELL	
	Seasurements Related to the HLR	
B.4.1	HLR Measurement Function	
B.4.1.1	Number of current MS's Roaming outside HPLMN	
B.4.1.2	Attempted requests for Authentication sets received by HLR	
B.4.1.3	Successful returned Authentication sets from HLR	
B.4.1.4	Empty responses to request for Authentication sets from HLR	
B.4.1.5 B.4.1.6	Attempted insert subscriber data service	
В.4.1.7	Attempted Location Updates	
B.4.1.7 B.4.1.8	Successful Location Updates	
B.4.1.9	Attempted SS related operations in HLR	
B.4.1.10		
B.4.1.11	Attempted request for SM routing information	
B.4.1.12	Successful request for SM routing information	
B.4.1.13	Attempted SM delivery status report procedures	
B.4.1.14	Successful SM delivery status report procedures	
B.4.1.15	Attempted number of send alerts	
B.4.1.16		
B.4.1.17	Attempted request for MSRN	
B.4.1.18	Successful request for MSRN	
D 5 1	•	
	Measurements Related to the VLR	
B.5.1	VLR Measurement Function	
B.5.1.1	Attempted MS memory available notifications	
B.5.1.2	Successful MS memory available notifications	
B.5.1.3	Attempted Identification requests to PVLRs	
B.5.1.4	Successful Identification requests to PVLRs	
B.5.1.5 B.5.1.6	Attempted page requests	
В.5.1.0	Successful page requests.	
B.5.1.8	Attempted page requests per Location Area	
B.5.1.9	Attempted requests for Authentication sets sent to HLR by VLRs	
B.5.1.10		
B.5.1.10	Empty responses to request for Authentication sets from HLR to VLRs	
B.5.1.12	Attempted authentication procedures in VLR	
B.5.1.12	Successful authentication procedures in the VLR	
B.5.1.14	Attempted intra-VLR Location Updates	
B.5.1.15	Successful intra-VLR Location Updates	
B.5.1.16	Attempted inter-VLR Location Updates	
B.5.1.17	Successful inter-VLR Location Updates	
B.5.1.18	Arrivals of Visitors from other PLMNs	
D ( )		
	leasurements Related to the EIR	
B.6.1	EIR Measurement Function	
B.6.1.1	Number of received IMEI check requests	
B.6.1.2	Number of white answers in EIR.	
B.6.1.3	Number of grey answers in EIR.	
B.6.1.4	Number of black answers in EIR	
B.6.1.5	Number of unknown IMEI answers	
B.7 M	leasurements Related to the SMS IWMSC/GMSC	95
B.7.1	SMS Measurement Function	
B.7.1.1	Attempted mobile originating SM Forwarding	
B.7.1.2	Successful mobile originating SM Forwarding	
B.7.1.3	Attempted Mobile Terminating SM Forwarding	
B.7.1.4	Successful Mobile Terminating SM Forwarding	
DO N	leasurements Related to the SGSN	
B.8.1	SGSN Measurement Function	
B.8.1.1	LLC Measurements	
B.8.1.1.1	Number of LLC frames sent	97

B.8.1.1.2	Number of LLC frames Received	97
B.8.1.1.3	Erroneously received LLC frames detected by SGSN	97
B.8.1.1.4	Number of Retransmitted LLC frames in Acknowledge Mode	98
B.8.1.2	SNDCP Measurements	98
B.8.1.2.1	Number of received SNDCP N-PDUs	98
B.8.1.2.2	Number of received SNDCP N-PDU octets	98
B.8.1.2.3	Number of sent SNDCP N-PDUs	
B.8.1.2.4	Number of sent SNDCP N-PDU octets	
B.8.1.3	BSSGP Measurements.	
B.8.1.4	MM Measurements	
B.8.1.4.1	Attempted GPRS attach procedures	
B.8.1.4.2	Successful GPRS attach procedures	
B.8.1.4.3	Attempt of combined GPRS/IMSI attach procedures	
B.8.1.4.4	Successfully combined GPRS/IMSI attach procedures	
B.8.1.4.5	Attempted GPRS attach procedures with IMSI already attached	
B.8.1.4.6	Successful GPRS attach procedures with IMSI already attached	
B.8.1.4.7	Number of attached subscriber	
B.8.1.4.8	Mean number of attached subscriber	
B.8.1.4.9	Maximum number of attached subscriber	
B.8.1.4.10	Attempted GPRS detach procedures initiated by MS	
B.8.1.4.11	Attempt of Combined GPRS/IMSI detach procedures initiated by MS	
B.8.1.4.12	Attempt of IMSI detach procedures initiated by MS	
B.8.1.4.13	Attempted GPRS detach procedures initiated by SGSN	
B.8.1.4.14	Successful GPRS detach procedures initiated by SGSN	
B.8.1.4.15	Attempted intra-SGSN Routing Area Update procedures initiated in this SGSN	
B.8.1.4.16	Successful intra-SGSN Routing Area Update procedures initiated in this SGSN	
B.8.1.4.17	Attempted inter-SGSN Routing Area Update procedures initiated in this SGSN	
B.8.1.4.18	Successful inter-SGSN Routing Area Update procedures initiated in this SGSN	
B.8.1.5	Security	
B.8.1.5.1 B.8.1.5.2	Attempted P-TMSI reallocation procedures	
B.8.1.5.3	Successful P-TMSI reallocation procedures	
B.8.1.5.4	Successful requests for authentication sets to HLR	
B.8.1.5.5	Empty responses to the request for authentication sets to the HLR	
B.8.1.5.6	Attempt of authentication procedures started by SGSN	
B.8.1.5.7	Successful authentication procedures started by the SGSN	
B.8.1.5.8	Attempted Identity Request procedures	
B.8.1.5.9	Successful Identity Request procedures	
B.8.1.6	State	
B.8.1.6.1	Number of subscribers in the SGSN in STANDBY state.	
B.8.1.6.2	Mean number of subscribers in the SGSN in STANDBY state	
B.8.1.6.3	Maximum number of subscribers in the SGSN in STANDBY state	
B.8.1.6.4	Number of subscribers in the SGSN in READY state	
B.8.1.6.5	Mean number of subscribers in the SGSN in READY state	110
B.8.1.6.6	Maximum number of subscribers in the SGSN in READY state	110
B.8.1.7	Equipment	111
B.8.1.7.1	Number of transmitted check IMEI requests	111
B.8.1.7.2	Number of white answers in SGSN	
B.8.1.7.3	Number of grey answers in SGSN	111
B.8.1.7.4	Number of black answers in SGSN	
B.8.1.7.5	Number of unknown IMEI answers	112
B.8.1.8	RRM Measurements	
B.8.1.8.1	Attempt of packet switched paging procedures	
B.8.1.8.2	Unsuccessful packet switched paging procedures	
B.8.1.8.3	Attempt of packet switched paging procedures per Routing Area	
B.8.1.8.4	Unsuccessful packet switched paging procedures per Routing Area	
B.8.1.9	SM Measurements	
B.8.1.9.1	Attempted PDP context activation procedures initiated by MS	
B.8.1.9.2	Successful PDP context activation procedures initiated by MS	
B.8.1.9.3	Attempted dynamic PDP context activation procedures initiated by MS	
B.8.1.9.4	Successful dynamic PDP context activation procedures initiated by MS	
B.8.1.9.5	Attempted PDP context deactivation procedures initiated by the MS	113

B.8.1.9.6	Successful PDP context deactivation procedures initiated by the MS	115
B.8.1.9.7	Attempted PDP context deactivation procedures initiated by the GGSN	116
B.8.1.9.8	Successful PDP context deactivation procedures initiated by the GGSN	116
B.8.1.9.9	Number of subscribers with activated PDP context in SGSN	116
B.8.1.9.10	Mean number of subscribers with activated PDP context in SGSN	117
B.8.1.9.11	Maximum number of subscribers with activated PDP context in SGSN	117
D 0 17		
	easurements Related to the GGSN	
B.9.1	GGSN Measurement Function	
B.9.1.1	Number of PDP context activation procedures initiated by the MS Per APN	
B.9.1.2	Successful PDP context activation procedures initiated by the MS Per APN	
B.9.1.3	Number of dynamic PDP context activation procedures initiated by the MS Per APN	
B.9.1.4	Successful +dynamic PDP context activation procedures initiated by the MS Per APN	
B.9.1.5	Number of PDP context deactivation procedures initiated by the MS Per APN	
B.9.1.6	Successful PDP context deactivation procedures initiated by the MS Per APN	
B.9.1.7	Number of PDP context deactivation procedures initiated by the GGSN Per APN	
B.9.1.8	Successful PDP context deactivation procedures initiated by the GGSN Per APN	
B.9.1.9	Number of active PDP context in GGSN Per APN	
B.9.1.10	Mean number of active PDP context in GGSN Per APN	
B.9.1.11	Maximum number of PDP context in GGSN Per APN	121
Annex C	C (normative): Performance Measurement Object Model	122
C.1 M	easurement Managed Object Classes	123
C.1.1	object class from ITU-T ISO	123
C.1.1	bscMeasurementFunction	
C.1.2 C.1.3	cellMeasurementFunction	
C.1.3	internalHdoMeasurementFunction	
C.1.4 C.1.5	mscMeasurementFunction	
C.1.5 C.1.6	externalHdoMeasurementFunction	
C.1.6 C.1.7	hlrMeasurementFunction	
C.1.7	vlrMeasurementFunction	
C.1.8 C.1.9	eirMeasurementFunction eirMeasurementFunction	
C.1.9 C.1.10		
C.1.10 C.1.11	smsMeasurementFunction sgsnMeasurementFunction sgsnMea	
C.1.11 C.1.12	ggsnMeasurementFunction	
C.1.12	ggsinvieasurementrunction	130
C.2 M	easurement Package Definitions	131
C.2.1	General Measurement Function Packages	
C.2.1.1	basicMeasurementFunctionPackage	
C.2.2		131
C.2.2.1	requestForServicePackage	
C.2.2.2	requestForServicePerCausePackage	
C.2.2.3	interArrivalTimePackage	
C.2.2.4	pagingMessagePerBSCPackage	
C.2.2.5	immediateAssignmentProceduresPerBSCPackage	
C.2.2.6	internalHandoversIntraCellPerBSCPackage	
C.2.2.7	internalHandoversPerBSCPackage	
C.2.2.8	internalHandoversPerCausePackage	
C.2.2.9	internalHandoverFailuresPerBSCPackage	
C.2.2.10	gprsPDUFlushReqPackage	
C.2.2.11	gprsPagingRequestPackage	
C.2.2.12	gprsInterArrivalPackage	
C.2.3	CELL Measurement Function Related Packages	
C.2.3.1	pchagchQueuePackage	
C.2.3.2	pagingMessagePackage	
C.2.3.3	immediateAssignmentProceduresPackage	
C.2.3.4	immediateAssignmentProceduresPerCausePackage	
C.2.3.5	pageDiscardPackage	
C.2.3.6	durationOfPagingProceduresPackage	
C.2.3.7	tchAvailablePackage	
C.2.3.8	tchBusyPackage	
C.2.3.9	idleTCHsPerInterferenceBandPackage	135

C.2.3.10	tchSeizuresPackage	
C.2.3.11	tchAllocatedTimePackage	
C.2.3.12	tchBusyTimePackage	135
C.2.3.13	tchQueuePackage	135
C.2.3.14	lostRadioLinksPerTCHPackage	136
C.2.3.15	sdcchAvailablePackage	136
C.2.3.16	sdcchBusyPackage	
C.2.3.17	sdcchSeizuresPackage	136
C.2.3.18	sdcchAllocatedTimePackage	
C.2.3.19	sdcchQueuePackage	136
C.2.3.20	lostRadioLinksPerSDCCHPackage	
C.2.3.21	downlinkPowerControlPackage	
C.2.3.22	uplinkPowerControlPackage	
C.2.3.23	internalHandoversIntraCellPackage	
C.2.3.24	incomingInternalInterCellHandoversPackage	
C.2.3.25	outgoingInternalInterCellHandoversPackage	
C.2.3.26	internalHandoverFailurePackage	
C.2.3.27	gprsPDCHAvailablePackage	
C.2.3.28	gprsPDCHOccupiedPackage	
C.2.3.29	gprsPDCHAllocatedPackage	
C.2.3.30	gprsPCCCHPagingPackage	
C.2.3.31	gprsPPCHQueueOnPCCCHPackage	
C.2.3.31 C.2.3.32	gprsPDTCHAssignmentPackage	
C.2.3.32 C.2.3.33	gprsPDTCHAssignmentrackage gprsPDTCHQueuePackage	
C.2.3.34	gprsCSChangePackage gprsCSChangePackage	
C.2.3.34 C.2.4		
	internal HDO Measurement Function Related Packages	
C.2.4.1	incomingInternalInterCellPerCellHandoversPackage	
C.2.4.2	outgoingInternalInterCellPerCellHandoversPackage	
C.2.5	MSC Measurement Function Related Packages	
C.2.5.1	classMarkPackage	
C.2.5.2	mobileOriginatingCallsPackage	
C.2.5.3	mobileTerminatingCallsPackage	
C.2.5.4	mobileEmergencyCallsPackage	
C.2.5.5	cipheringModePackage	
C.2.5.6	interrogating HLRPackage	
C.2.5.7	mobileOriginatingPointToPointSMPackage	
C.2.5.8	mobileTerminatingPointToPointSMPackage	
C.2.5.9	imeiRequestPackage	
C.2.5.10	whiteAnswersInMSCPackage	
C.2.5.11	greyAnswersInMSCPackage	
C.2.5.12	blackAnswersInMSCPackage	
C.2.5.13	unknownIMEIAnswersInMSCPackage	
C.2.5.14	callSetupServicePackage	142
C.2.5.15	locationUpdatingServicePackage	
C.2.5.16	subscriberIdentifiedWithTMSIPackage	143
C.2.5.17	subscriberIdentifiedWithIMSIPackage	143
C.2.5.18	tmsiReallocationsPackage	143
C.2.5.19	imsiDetachProceduresPackage	143
C.2.5.20	incomingExternalIntraMSCHandoversPackage	
C.2.5.21	outgoingExternalIntraMSCHandoversPackage	
C.2.5.22	incomingInterMSCHandoversPackage	
C.2.5.23	outgoingInterMSCHandoversPackage	
C.2.5.24	subsequentInterMSCHandoversToMACaPackage	
C.2.5.25	subsequentInterMSCHandoversToMACcPackage	
C.2.5.26	externalHandoversPackage	
C.2.5.27	externalHandoversPerCausePackage	
C.2.5.28	externalHandoverFailurePerMSCPackage	
C.2.5.26 C.2.6	external HDO Measurement Function Related Packages	
C.2.6.1	incomingExternalIntraMSCHandoversPerCellPackage	
C.2.6.2	outgoingExternalIntraMSCHandoversPerCellPackage	
C.2.6.2 C.2.6.3	incomingExternalInterMSCHandoversPerCellPackage	
C.2.6.3 C.2.6.4	outgoingExternalInterMSCHandoversPerCellPackageoutgoingExternalInterMSCHandoversPerCellPackage	
C.4.U.4	OULZOINZEAROINAINIKUIVISCITAIRUUVEISE EICEHE ACKAZE	1 4(

C.2.7	HLR Measurement Function Related Packages	
C.2.7.1	msRoamingOutsideHPLMNPackage	
C.2.7.2	authenticationSetsHLRToVLRPackage	
C.2.7.3	insertSubscriberDataServicePackage	146
C.2.7.4	locationUpdatePackage	147
C.2.7.5	ssRelatedOperationsInHLRPackage	147
C.2.7.6	requestForSMRoutingPackage	147
C.2.7.7	smDeliveryStatusReportProceduresPackage	147
C.2.7.8	sendAlertsPackage	
C.2.7.9	requestForMSRNPackage	
C.2.8	VLR Measurement Function Related Packages	
C.2.8.1	msMemoryAvailableNotificationsPackage	
C.2.8.2	identificationRequestToPVLRPackage	
C.2.8.3	pageRequestPackage	
C.2.8.4	pageRequestPerLocationAreaPackage	
C.2.8.5	authenticationSetsVLRToHLRPackage	
C.2.8.6	authenticationInVLRPackage	
C.2.8.7	intraVLRLocationUpdatePackage	
C.2.8.8	interVLRLocationUpdatePackage	
C.2.8.9	visitorsFromOtherPLMNPackage	
C.2.9	EIR Measurement Function Related Packages	
C.2.9.1	receivedIMEIcheckRequestPackage	
C.2.9.2	whiteAnswersInEIRPackage	
C.2.9.3	greyAnswersInEIRPackage	
C.2.9.4	blackAnswersInEIRPackage	
C.2.9.4 C.2.9.5	unknownIMEIAnswersInEIRPackage	
C.2.9.3 C.2.10		
C.2.10 C.2.10.1	SMS Measurement Function Related Packages	
C.2.10.1 C.2.10.2	mobileOriginatingSMForwardingPackage	
	mobileTerminatingSMForwardingPackage	
C.2.11	SGSN Measurement Function Related Packages	
C.2.11.1	sgsnLLCPackage	
C.2.11.2	sgsnSNDCPPackage	
C.2.11.3	gprsAttachPackage	
C.2.11.4	gprsIMSIAttachPackage	
C.2.11.5	gprsIMSIAlreadyAttachedPackage	
C.2.11.6	gprsAttachedSubscribersPackage	
C.2.11.7	gprsMSDetachPackage	
C.2.11.8	gprsSGSNDetachPackage	
C.2.11.9	gprsRouting AreaUpdatePackage	
C.2.11.10	pTMSIReallocationPackage	
C.2.11.11	sgsnHLRAuthenticationPackage	
C.2.11.12	sgsnAuthenticationProcPackage	
C.2.11.13	sgsnIdentityRequestPackage	153
C.2.11.14	sgsnCipheringModePackage	154
C.2.11.15	gprsSubsStandbyStatePackage	154
C.2.11.16	gprsSubsReadyStatePackage	154
C.2.11.17	sgsnIMEICheckRequestsPackage	154
C.2.11.18	whiteAnswersInSGSNPackage	154
C.2.11.19	greyAnswersInSGSNPackage	154
C.2.11.20	blackAnswersInSGSNPackage	155
C.2.11.21	unknownIMEIAnswersInSGSNPackage	
C.2.11.22	sgsnPacketSwitched PagingPackage	
C.2.11.23	sgsnPacketSwitched PagingPerRAPackage	
C.2.11.24	sgsnPDPContextActivationByMSPackage	
C.2.11.25	sgsnDynamicPDPContextActivationByMSPackage	
C.2.11.26	sgsnPDPContextDeactivationByMSPackage	
C.2.11.27	sgsnPDPContextDeactivationByGGSNPackage	
C.2.11.27 C.2.11.28	subscriberPDPContextsAtSGSNPackage	
C.2.11.26 C.2.12	GGSN Measurement Function Related Packages	
C.2.12.1	ggsnPDPContextActivationByMSPackage	
C.2.12.1 C.2.12.2	• •	
C.2.12.2 C.2.12.3	ggsnDynamicPDPContextActivationByMSPackage	
C.2.12.5	ggsnPDPContextDeactivationByMSPackage	15/

C.2.12.4	ggsnPDPContextDeactivationByGGSNPackage	157
C.2.12.5		
	<u> </u>	
	leasurement Attribute Definitions	
C.3.1	General Measurement Function Related Attributes	
C.3.1.1	measurementFunctionId	
C.3.1.2	observedCell	
C.3.1.3	adjacentCell	
C.3.2	BSC Measurement Function Related Attributes	
C.3.2.1	unsuccReqsForService	
C.3.2.2	unsuccReqsForServicePerCause	
C.3.2.3	meanInterArrivalTime	
C.3.2.4	attTransOfPagingMessagesPerBSC	
C.3.2.5	unsuccTransOfPagingMessagesPerBSC	
C.3.2.6	attImmediateAssingProcsPerBSC	
C.3.2.7	succImmediateAssingProcsPerBSC	
C.3.2.8	succInternalHDOsIntraCellPerBSC	
C.3.2.9	unsuccInternalHDOsIntraCellPerBSC	
C.3.2.10	succInternalHDOsPerBSC	160
C.3.2.11	succInternalHDOsPerCause	
C.3.2.12		
C.3.2.13	unsuccInternalHDOsWithLossOfConnectionPerBSC	161
C.3.2.14	flushRequestReceived	161
C.3.2.15	pagingReqReceivedfromSgsn	161
C.3.2.16	meanPSInterArrivalTime	161
C.3.3	CELL Measurement Function Related Attributes	161
C.3.3.1	meanPCHAGCHQueueLength	161
C.3.3.2	attTransOfPagingMessagesThePCH	161
C.3.3.3	unsuccTransOfPagingMessagesThePCH	162
C.3.3.4	attImmediateAssingProcs	162
C.3.3.5	succImmediateAssingProcs	162
C.3.3.6	attImmediateAssingProcsPerCause	162
C.3.3.7	succImmediateAssingProcsPerCause	162
C.3.3.8	nbrOfPagesDiscardedFromPCHQueue	162
C.3.3.9	meanDurationOfSuccPagingProcs	163
C.3.3.10	nbrOfAvailableTCHs	163
C.3.3.11	meanNbrOfBusyTCHs	163
C.3.3.12	maxNbrOfBusyTCHs	163
C.3.3.13	meanNbrOfIdleTCHsPerInterferenceBand	163
C.3.3.14	attTCHSeizures	163
C.3.3.15	succTCHSeizures	164
C.3.3.16	attTCHSeizuresMeetingTCHBlockedState	164
C.3.3.17	allAvailableTCHAllocatedTime	164
C.3.3.18	meanTCHBusyTime	164
C.3.3.19	meanTCHQueueLength	164
C.3.3.20	nbrOfLostRadioLinksTCH	165
C.3.3.21	nbrOfAvailableSDCCHs	165
C.3.3.22	meanNbrOfBusySDCCHs	165
C.3.3.23	maxNbrOfBusySDCCHs	165
C.3.3.24	attSDCCHSeizuresMeetingSDCCHBlockedState	165
C.3.3.25	allAvailableSDCCHAllocatedTime	165
C.3.3.26		
C.3.3.27		
C.3.3.28		
C.3.3.29		
C.3.3.30		
C.3.3.31	unsuccInternalHDOsIntraCell	
C.3.3.32		
C.3.3.33		
C.3.3.34		
C.3.3.35		
C.3.3.36		4.5

C.3.3.37	unsuccHDOsWithLossOfConnection	167
C.3.3.38	availablePDCH	168
C.3.3.39	meanNbrAvailablePDCH	168
C.3.3.40	maxNbrAvailablePDCH	168
C.3.3.41	minNbrAvailablePDCH	168
C.3.3.42	meanNbrOfOccPDCH	168
C.3.3.43	maxNbrOfOccPDCH	169
C.3.3.44	minNbrOfOccPDCH	
C.3.3.45	availablePDCHAllocatedTime	
C.3.3.46	nbrPacketPagingMessagesPCHOnPCCCH	
C.3.3.47	meanPPCHPAGCHQueueLengthOnPCCCH	169
C.3.3.48	nbrOfPSPagesDiscardedFromPPCHQueueOnPCCCH	
C.3.3.49	attPCReqAssPerCause	
C.3.3.50	succPDTCHAssProcsPerCause	
C.3.3.51	succPDTCHSeizures	
C.3.3.52	meanPacketQueueLength	
C.3.3.53	nbrOfServiceChanges	
C.3.4	internal HDO Measurement Function Related Attributes	
C.3.4.1	attIncomingInternalInterCellHDOsPerOriginatingCell	
C.3.4.2	succIncomingInternalInterCellHDOsPerOriginatingCell	
C.3.4.3	attOutgoingInternalInterCellHDOsPerTargetCellsuccOutgoingInternalInterCellHDOsPerTargetCell	
C.3.4.4 C.3.5	MSC Measurement Function Related Attributes	
C.3.5.1	nbrOfClassMarkUpdates	
C.3.5.1	attMobileOriginatingCalls	
C.3.5.2 C.3.5.3	succMobileOriginatingCalls	
C.3.5.4	ansMobileOriginatingCalls	
C.3.5.5	attMobileTerminatingCalls	
C.3.5.6	succMobileTerminatingCalls	
C.3.5.7	ansMobileTerminatingCalls	
C.3.5.8	attMobileEmergencyCalls	
C.3.5.9	succMobileEmergencyCalls	
C.3.5.10	ansMobileEmergencyCalls	
C.3.5.11	attCipheringModeControlProcs	
C.3.5.12	succCipheringModeControlProcs	
C.3.5.13	attInterrogationOfHLRsForRouting	
C.3.5.14	succInterrogationOfHLRsMSRNObtained	
C.3.5.15	succInterrogationOfHLRsCallForwarding	174
C.3.5.16	attOpForMobileOriginatingPointToPointSMs	174
C.3.5.17	succOpForMobileOriginatingPointToPointSMs	174
C.3.5.18	attOpForMobileTerminatingPointToPointSMs	174
C.3.5.19	succOpForMobileTerminatingPointToPointSMs	174
C.3.5.20	nbrOfTransCheckIMEIRequests	
C.3.5.21	nbrOfWhiteAnsInMSC	175
C.3.5.22	nbrOfGreyAnsInMSC	175
C.3.5.23	nbrOfBlackAnsInMSC	
C.3.5.24	nbrOfUnknownIMEIAnsInMSC	
C.3.5.25	meanTimeToCallSetupService	
C.3.5.26	meanTimeToLocationUpdateService	
C.3.5.27	transSubIdentifiedWithTMSI	
C.3.5.28	transSubIdentifiedWithIMSI	
C.3.5.29	attTMSIReallocations	
C.3.5.30	succTMSIReallocations	
C.3.5.31	imsiDetachProcs	
C.3.5.32	imsiAttachProcs	
C.3.5.33	attIncomingExternalIntraMSCHDOs	
C.3.5.34	succIncomingExternalIntraMSCHDOs	
C.3.5.35	attOutgoingExternalIntraMSCHDOs.	
C.3.5.36	succOutgoingExternalIntraMSCHDOs.	
C.3.5.37	attIncomingInterMSCHDOs	
C.3.5.38	succIncomingInterMSCHDOs	1/8 178

C.3.5.40	succOutgoingInterMSCHDOs	
C.3.5.41	attSubsequentInterMSCHDOsMSCa	
C.3.5.42	succSubsequentInterMSCHDOsMSCa	
C.3.5.43	attSubsequentInterMSCHDOsMSCc	
C.3.5.44	succSubsequentInterMSCHDOsMSCc	
C.3.5.45	external HDOs	
C.3.5.46	externalHDOsPerCause	
C.3.5.47	unsuccExternHDOsWithReconnectionPerMSC	
C.3.5.48	unsuccExternHDOsWithLossOfConnectionPerMSC	
C.3.6	external HDO Measurement Function Related Attributes	
C.3.6.1	attIncomingExternalIntraMSCHDOsPerOriginatingCell	
C.3.6.2	succIncomingExternalIntraMSCHDOsPerOriginatingCell	
C.3.6.3	attOutgoingExternalIntraMSCHDOsPerTargetCell	
C.3.6.4	succOutgoingExternalIntraMSCHDOsPerTargetCell	
C.3.6.5	attIncomingInterMSCHDOsPerOriginatingCell	
C.3.6.6	succIncomingInterMSCHDOsPerOriginatingCell	
C.3.6.7	attOutgoingInterMSCHDOsPerTargetCell	
C.3.6.8	succOutgoingInterMSCHDOsPerTargetCell	
C.3.7	HLR Measurement Function Related Attributes	
C.3.7.1	nbrOfCurrentMSsRoamingOutsideHPLMN	
C.3.7.2 C.3.7.3	attReqForAuthSetsReceivedByHLRFromVLRssuccReturnedAuthSetsFromHLRToVLRs	
C.3.7.4 C.3.7.5	emptyResponsesForAuthSetsFromHLRToVLRs	
C.3.7.6	succInsertSubDataService succInsertSubDataService	
C.3.7.7	attLocationUpdate	
C.3.7.7	succLocationUpdate	
C.3.7.8 C.3.7.9	attSSRelatedOperationsInHLR	
C.3.7.10	succSSRelatedOperationsInHLR.	
C.3.7.10	attReqForSMRoutingInfo	
C.3.7.11	succReqForSMRoutingInfo	
C.3.7.13	attSMDeliveryStatusReportProcs	
C.3.7.14	succSMDeliveryStatusReportProcs	
C.3.7.15	attNbrOfSendAlerts	
C.3.7.16	succNbrOfSendAlerts	
C.3.7.17	attReqForMSRN	
C.3.7.18	succRegForMSRN	
C.3.8	VLR Measurement Function Related Attributes	
C.3.8.1	attMSMemoryAvailableNotifications	.184
C.3.8.2	succMSMemoryAvailableNotifications	.184
C.3.8.3	attIdentificationReqToPVLRs	.185
C.3.8.4	succIdentificationReqToPVLRs	.185
C.3.8.5	attPageReqs	.185
C.3.8.6	succPageReqs	
C.3.8.7	attPageReqsPerLocationArea	.185
C.3.8.8	succPageReqsPerLocationArea	
C.3.8.9	attReqForAuthSetsSentToHLR	
C.3.8.10	succReceivedAuthSetsFromHLR	
C.3.8.11	emptyResponsesForAuthFromHLR	
C.3.8.12	attAuthProcsInVLR	
C.3.8.13	succ AuthProcsInVLR	
C.3.8.14	attIntraVLRLocationUpdates	
C.3.8.15	succIntraVLRLocationUpdates	
C.3.8.16	attInterVLRLocationUpdates	
C.3.8.17	succInterVLRLocationUpdates	
C.3.8.18	arrivalOfVisitorsFromOtherPLMNs.	
C.3.9	EIR Measurement Function Related Attributes	
C.3.9.1	nbrOfReceivedIMEICheckReqs	
C.3.9.2	nbrOfCroyAngInEIR	
C.3.9.3 C.3.9.4	nbrOfGreyAnsInEIR	
C.3.9.4 C.3.9.5	nbrOfBlackAnsInEIRnbrOfUnknownIMEIAnsInEIR	
U.J.7.J	HOLOTOHMIUWIHIVIETAHMIIETA	.100

C.3.10	SMS Measurement Function Related Attributes	188
C.3.10.1	attMobileOriginatingSMForwardings	188
C.3.10.2	succMobileOriginatingSMForwardings	
C.3.10.3	attMobileTerminatingSMForwardings	
C.3.10.4	succMobileTerminatingSMForwardings	
C.3.10.5	attMobileTerminatingSMForwardingsSgsn	
C.3.10.6	succMobileTerminatingSMForwardingsSgsn	189
C.3.11	SGSN Measurement Function Related Attributes	189
C.3.11.1	nbrLlcFramesSent	
C.3.11.1	nbrllcFramesReceived	
C.3.11.2	errLlcFramesDetectedBySgsn	
C.3.11.3	retransmittedLlcFramestoMs	
C.3.11.5	uplinkSndcpNpduReceived	
C.3.11.6	uplinkSndcpOctetReceivedMode	
C.3.11.0 C.3.11.7	downlinkSndcpNpdusent	
C.3.11.7	downlinkSndcpOctetSent.	
C.3.11.8 C.3.11.9	attGprsAttach	
C.3.11.9 C.3.11.10	succGprsAttach	
C.3.11.10 C.3.11.11	attCombiAttach	
C.3.11.11 C.3.11.12	succCombiAttach	
C.3.11.12 C.3.11.13		
C.3.11.13 C.3.11.14	attImsiAttach	
C.3.11.14 C.3.11.15	succImsiAttach	
	nbrOfAttachedSubmeanNbrOfAttachedSub	
C.3.11.16		
C.3.11.17	maxNbrOfAttachedSub	
C.3.11.18	attGprsDetachMs	
C.3.11.19	attCombiDetachMs	
C.3.11.20	attImsiDetachMs	
C.3.11.21	attGprsdetachSgsn	
C.3.11.22	succGprsdetachSgsn	
C.3.11.23	attItraSgsnRaUpdate	
C.3.11.24	succIntraSgsnRaUpdate	
C.3.11.25	attInterSgsnRaUpdate	
C.3.11.26	succInterSgsnRaUpdate	
C.3.11.27	attPTMSIRealloc	
C.3.11.28	succPTMSIrealloc	
C.3.11.29	attreqAuthSetsSentToHlrBySgsn	
C.3.11.30	succReqAuthSetsHlr	
C.3.11.31	emptyResponsesForAuthSetsFromHlr	
C.3.11.32	attAuthInSgsn	
C.3.11.33	succAuthInSgsn	
C.3.11.34	attIdentityReq	
C.3.11.35	succIdentityReq	
C.3.11.36		
C.3.11.37	succCipheringModeControlPerSgsn	
C.3.11.38	nbrOfSubStandby	
C.3.11.39	meanNbrOfSubStandby	
C.3.11.40	maxNbrOfSubStandby	
C.3.11.41	nbrOfSubReady	
C.3.11.42	meanNbrOfSubReady	
C.3.11.43	maxNbrOfSubReady	
C.3.11.44	nbrOfCheckIMEIRequests	
C.3.11.45	nbrOfWhiteAnswerInSgsn	
C.3.11.46	nbrOfGreyAnswerInSgsn	
C.3.11.47	nbrOfBlackAnswerInSgsn	
C.3.11.48	nbrOfUnknownAnswerInSgsn	
C.3.11.49	attPacketSwitchedPaging	
C.3.11.50		
C.3.11.51	attPsPagingPerRoutingArea	
C.3.11.52	unsuccPsPagingPerRoutingArea	
C.3.11.53	attActPdpContextMSPerSgsn	
C 3 11 5/	succ ActPdnContextMSPerSgsn	100

C.3.11.55	attActPdpContextDynMSPerSgsn	199
C.3.11.56	succActPdpContextDynMSPerSgsn	
C.3.11.57	attDeactPdpContextMsPerSgsn	
C.3.11.58	succDeactPdpContextMsPerSgsn	
C.3.11.59	attDeactPdpContextGgsnPerSgsn	
C.3.11.60	succDeactPdpContextGgsnPerSgsn	
C.3.11.61	nbrSubsWithActivePdpInSgsn	
C.3.11.62	meanSubsWithActivePdpInSgsn	
C.3.11.63	nmaxSubsWithActivePdpInSgsn	
C.3.12	GGSN Measurement Function Related Attributes	
C.3.12.1	attActPdpContextPerApnOfGgsn	
C.3.12.2	succActPdpContextPerApnOfGgsn	
C.3.12.3	attActPdpContextDnyPerApnOfGgsn	
C.3.12.4	succActPdpContextDnyPerApnOfGgsn	
C.3.12.5	attDeactPdpContextMsPerApnOfGgsn	
C.3.12.6	succDeactPdpContextMsPerApnOfGgsn	
C.3.12.7	attDeactPdpContextByGgsnPerApn	
C.3.12.8	succDeactPdpContextByGgsnMsPerApn	
C.3.12.9	nbrOfActivePdpContextsPerApnAtGgsn	
C.3.12.10	meanNbrOfActivePdpContextsPerApnAtGgsn	
C.3.12.11	maxNbrOfActivePdpContextsPerApnAtGgsn	202
C.4 Na	me Bindings	203
	BSS Name Binding	
C.4.1 C.4.1.1	simpleScanner-bssFunction	
	<u>*</u>	
C.4.2.1	BSC Name BindingbscMeasurementFunction-bsc	
C.4.3 C.4.3.1	BTS Name Binding	
	cellMeasurementFunction-bts	
C.4.3.2	internalHdoMeasurementFunction-bts	
C.4.4 C.4.4.1	MSC Name Binding	
C.4.4.1 C.4.4.2	mscMeasurementFunction-mscFunction	
	externalHdoMeasurementFunction-mscFunction	
C.4.4.3	simpleScanner-mscFunction	
	HLR Name Binding	
C.4.5.1	hlrMeasurementFunction-hlrFunction	
C.4.5.2	simpleScanner-hlrFunction	
	VLR Name Binding	
C.4.6.1	vlrMeasurementFunction-vlrFunction	
C.4.6.2	simpleScanner-vlrFunction	
	EIR Name Binding	
C.4.7.1	eirMeasurementFunction-eirFunction	
C.4.7.2	simpleScanner-eirFunction	
	SMS Name Binding	
C.4.8.1	smsMeasurementFunction-smsGIWFunction	
C.4.8.2	simpleScanner-smsGIWFunction	
	SGSN Name Binding	
C.4.9.1	sgsnMeasurementFunction-sgsnFunction	
C.4.9.2	simpleScanner-sgsnFunction	
	GGSN Name Binding	
C.4.10.1	ggsnMeasurementFunction-vlrFunction	
C.4.10.2	simpleScanner-ggsnFunction	207
C.5 Bel	naviour Definitions	208
	simple scanner behaviour	
	general measurement function behaviour	
	general measurement package behaviour	
	general measurement attribute behaviour	
	stract syntax definitions	
	(normative): Data Transfer Requirements	
	· •	

	Data Transfer Requirements	
D.1.1	General	
D.2	Object Model	
D.2.1		
D.2.1.	· · · · · · · · · · · · · · · · · · ·	
D.2.1.1 D.2.2	1	
D.2.2 D.2.2.	E	
D.2.2. D.2.2.		
D.2.2.	2 Scanceporticeord-log	212
Anne	ex E (informative): Non Standardised Measurements of Interest to PLMN N	Ianagement214
E.1	Measurement Related to the BSC	214
E.1.1	BSC Measurement Function	214
E.2	Measurement Related to the BTS	2.14
E.2.1	BTS Measurement Function	
E.2.2	CELL Measurement Function	
E.2.3	Internal HDO Measurement Function	
E.3	Measurement Related to the MSC	215
E.3.1	MSC Measurement Function	
E.3.1.1		
E.3.1.2		
E.3.1.3	3 Answered Mobile to Mobile Calls	215
E.3.1.4	1	
E.3.1.5		
E.3.1.6		
E.3.1.7	1	
E.3.1.8		
E.3.1.9 E.3.1.1		
E.3.1.1 E.3.2	10 Mean Holding Time of Calls	
E.4 E.4.1	Measurements related to the HLR	
E.4.1 E.4.1.1	HLR Measurement Function  1 Instantaneous number of HLR subscribers	
E.4.1.2		
E.4.1.3		
E.4.1.4		
E.4.1.5	•	
E.4.1.6		
E.5	Measurements related to the VLR	217
E.5.1	VLR Measurement Function	
E.5.1.1	Subscribers from other PLMNs registered in the VLR	217
E.5.1.2	Number of roamers in the VLR	217
E.6	Measurements related to the EIR	217
E.7	Measurements related to the SMS-IWMSC/GMSC	
E.8	Performance Measurements on non-specific GSM Objects	
E.8.1	Measurements related to a PCM system	
E.8.2	Measurements related to MTP	
E.8.3	Measurements related to SCCP and TCAP	
E.8.4	Measurements related to ISUP	
E.8.5	Measurements related to Internet Protocols	218
Anne	ex F (informative): Index of Measurement Attribute Names	219
Anne	ex G (informative): Bibliography	224
Anne	ex H (informative): Change history	225
Histor	•	226

## **Foreword**

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

#### where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

# Introduction

The present document is part of a TS-family covering the 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication Management; as identified below:

32.401:	Performance Management (PM); Concept and requirements
52.402:	Performance Management (PM); Performance measurements - GSM
32.404	Performance Management (PM); Performance measurements - Definitions and template
32.405	Performance Management (PM); Performance measurements Universal Terrestrial Radio Access Network (UTRAN)
32.406	Performance Management (PM); Performance measurements Core Network (CN) Packet Switched (PS) domain
32.407	Performance Management (PM); Performance measurements Core Network (CN) Circuit Switched (CS) domain
32.408	Performance Management (PM); Performance measurements Teleservice
32.409	Performance Management (PM); Performance measurements IP Multimedia Subsystem (IMS)

The present document is part of a set of specifications, which describe the requirements and information model necessary for the standardised Operation, Administration and Maintenance (OA&M) of a multi-vendor 3G-system GSM or UMTS PLMN.

During the lifetime of a 3G network PLMN, its logical and physical configuration will undergo changes of varying degrees and frequencies in order to optimise the utilisation of the network resources. These changes will be executed through network configuration management activities and/or network engineering, see GSM TS 12.06 [10] and 3GPP TS 32.106 [3].

Many of the activities involved in the daily operation and future network planning of a 3G PLMN network require data on which to base decisions. This data refers to the load carried by the network and the grade of service offered. In order to produce this data performance measurements are executed in the NEs, which comprise the network. The data can then be transferred to an external system, e.g. an Operations System (OS) in TMN terminology, for further evaluation. The purpose of the present document and its companion parts 1 and 3 is to describe the mechanisms involved in the collection of the data and the definition of the data itself.

# 1 Scope

[13]

The present document describes the TMN model for the administration of measurements and the collection of measurement result data in a GSM system. It also includes the measurement definitions for GSM. The concept and functional requirements for performance management in wireless GSM and UMTS systems is set out in TS 32.401 [31].

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1]	GSM 02.16: "Digital cellular telecommunication system (Phase 2+) (GSM); International Mobile Station Equipment Identities (IMEI)".
[2]	GSM 04.08: "Digital cellular telecommunication system (Phase 2+) (GSM); Mobile radio interface layer 3 specification".
[3]	GSM 04.11: "Digital cellular telecommunication system (Phase 2+) (GSM); Point-to-Point (PP) Short Message Service (SMS) Support on Mobile Radio Interface".
[4]	GSM 05.08: "Digital cellular telecommunication system (Phase 2+) (GSM); Radio Subsystem Link Control".
[5]	GSM 08.08: "Digital cellular telecommunication system (Phase 2+) (GSM); Mobile Switching Centre - Base Station system (MSC-BSS) Interface Layer 3 Specification".
[6]	GSM 08.58: "Digital cellular telecommunication system (Phase 2+) (GSM); Base Station Controller - Base Transceiver Station (BCS-BTS) Interface Layer 3 Specification".
[7]	GSM 09.02: "Digital cellular telecommunication system (Phase 2+) (GSM); Mobile Application Part (MAP) Specification".
[8]	GSM 12.00 (ETS 300 612-1): "Digital cellular telecommunication system (Phase 2); Network Management (NM); Part 1: Objectives and structure of network management".
[9]	GSM 12.01 (ETS 300 612-2): "Digital cellular telecommunication system (Phase 2) (GSM); Network Management (NM); Common aspects of GSM/DCS 1800 network management".
[10]	GSM 12.06 (ETS 300 617): "Digital cellular telecommunication system (Phase 2) (GSM); GSM network configuration management".
[11]	GSM 12.30 (ETR 128): "Digital cellular telecommunication system (Phase 2) (GSM); ETSI object identifier tree; Common domain; Mobile domain; Operation and Maintenance (O&M), managed object registration definition".
[12]	ITU-T Recommendation E.880: "Field data collection and evaluation on the performance of equipment, networks and services".

Common Management Information Service".

ITU-T Recommendation X.710: "Information technology - Open Systems Interconnection -

[14]	ITU-T Recommendation X.721: "Information technology - Open Systems Interconnection - Structure of management information: Definition of management information".
[15]	ITU-T Recommendation X.730: "Information technology - Open Systems Interconnection - Systems Management: Object management function".
[16]	ITU-T Recommendation X.731: "Information technology - Open Systems Interconnection - Systems Management: State management function".
[17]	ITU-T Recommendation X.734: "Information technology - Open Systems Interconnection - Systems Management: Event report management function".
[18]	ITU-T Recommendation X.735: "Information technology - Open Systems Interconnection - Systems Management: Log control function".
[19]	ITU-T Recommendation X.738: "Information technology - Open Systems Interconnection - Systems management: Summarization function".
[20]	ITU-T Recommendation X.739: "Information technology - Open Systems Interconnection - Systems Management: Metric objects and attributes".
[21]	ISO 8571: "Information processing systems - Open Systems Interconnection - File Transfer, Access and Management".
[22]	GSM 03.60: "Digital cellular telecommunications system (Phase 2+) (GSM); General Packet Radio Service (GPRS) Service description; Stage 2".
[23]	3GPP TS 44.060: "General Packet Radio Service (GPRS); Mobile Station (MS) - Base Station System (BSS) interface; Radio Link Control / Medium Access Control (RLC/MAC) protocol".
[24]	GSM 04.64: "Digital cellular telecommunications system (Phase 2+) (GSM); General Packet Radio Service (GPRS); Mobile Station - Serving GPRS Support Node (MS-SGSN) Logical Link Control (LLC) Layer Specification".
[25]	GSM 04.65: "Digital cellular telecommunications system (Phase 2+) (GSM); General Packet Radio Service (GPRS); Mobile Station (MS) - Serving GPRS Support Node (SGSN); Subnetwork Dependent Convergence Protocol (SNDCP)".
[26]	GSM 08.16: "Digital cellular telecommunications system (Phase 2+) (GSM); General Packet Radio Service (GPRS); Base Station System (BSS) - Serving GPRS Support Node (SGSN) interface; Network Service".
[27]	GSM 09.60: "Digital cellular telecommunications system (Phase 2+) (GSM); General Packet Radio Service (GPRS); GPRS Tunnelling Protocol GPT) across the Gn and Gp Interface".
[28]	IETF RFC 959: "File Transfer Protocol".
[29]	IETF RFC 783: "TFTP Protocol (revision 2)".
[30]	IETF RFC 1157: "Simple Network Management Protocol (SNMP)".
[31]	3GPP TS 32.401: "Telecommunication Management; Performance Management (PM); Concept and Requirements".
[32]	Void.

[33] 3GPP TS 32.404: "Telecommunication Management; Performance Management (PM); Performance measurements - Definitions and template".

3GPP TS 32.405: "Telecommunication Management; Performance Management (PM); Performance measurements Universal Terrestrial Radio Access Network (UTRAN) ".

3GPP TS 32.406: "Telecommunication Management; Performance Management (PM); Performance measurements Core Network (CN) Packet Switched (PS) domain".

3GPP TS 32.407: "Telecommunication Management; Performance Management (PM); Performance measurements Core Network (CN) Circuit Switched (CS) domain".

3GPP TS 32.408: "Telecommunication Management; Performance Management (PM); Performance measurements Teleservice".

3GPP TS 32.409: "Telecommunication Management; Performance Management (PM); Performance measurements IP Multimedia Subsystem (IMS) ".

[34] 3GPP TS 48.018: "General Packet Radio Service (GPRS); Base Station System (BSS) - Serving GPRS Support Node (SGSN); BSS GPRS protocol (BSSGP)".

# 3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

**AGCH** Access Grant Channel APN Access Point Name AuC **Authentication Centre Base Station Controller BSC** Base Station System BSS **BSSAP BSS** Application Part **BTS Base Transceiver Station CBCH** Cell Broadcast Channel **CCCH** Common Control Channel

CMIS Common Management Information Service

CMISE Common Management Information Service Element

DCCH Dedicated Control Channel
DCN Data Communication Network
EIR Equipment Identity Register

ETSI European Telecommunications Standards Institute

FACCH Fast Associated Control Channel FTAM File Transfer Access and Management

FTP File Transfer Protocol

GGSN Gateway GPRS Service Node

GMSC Gateway Mobile Services Switching Centre

GPRS General Packet Radio Service

GSN GPRS Service Node HLR Home Location Register

HO Handover
HPLMN Home PLMN

IMEI International Mobile Equipment Identity
 IMSI International Mobile Subscriber Identity
 ISDN Integrated Service Digital Network
 ISO International Standards Organisation

ITU-T The International Telegraph and Telephone Consultative Committee

LLC Logical Link Control
LR Location Register
MMI Man-Machine Interface
MML Man-Machine Language
MOC Managed Object Class

MOI Managed Object Instance

MS Mobile Station

MSC Mobile Services Switching Centre MSRN Mobile Subscriber Roaming Number

MTP Message Transfer Part NE Network Element

NMC Network Management Centre

NSS Network Sub System (including EIR, HLR, SMS-IWMSC, MSC and VLR)

O&M Operations and Maintenance

OA&M Operation, Administration and Maintenance

OACSU Off-Air Call Set Up

OMAP (ITU-T) Operations, Maintenance and Administration Part

OMC Operations and Maintenance Centre

OS Operations System

OSI Open System Interconnection
PCCCH Packet Common Control Channel

PCCH Packet Paging Channel
PCH Paging Channel

PLMN Public Land Mobile Network (including BSS and NSS)

PM Performance Management
PTCH Packet Traffic Channel
PVLR Previous VLR

QoS Quality of Service
RACH Random Access Channel
Rec. Recommendation

Ref. Reference RF Radio Frequency

ROSE Remote Operation Service Element

RR Radio Resource RXLEV Reception Level RXQUAL Reception Quality

SACCH Slow Associated Control Channel

SCCP (ITU-T) Signalling Connection Control Part SDCCH Stand alone Dedicated Control Channel

SGSN Serving GPRS Service Node

SMS-IWMSC Short Message Service Inter Working MSC SNDCP Sub Network Dependency Control Protocol SNMP Simple Network Management Protocol

Spec. Specification

SS Supplementary Service

TCAP (ITU-T) Transaction Capabilities Application Part

TCH Traffic Channel

TMN Telecommunications Management Network
TMSI Temporary Mobile Subscriber Identity

TS Technical Specification
VLR Visitors Location Register

# 4 Detailed description of the measurement system for a GSM PLMN

## 4.1 Introduction

TS 32.401 [31] describes the required functions for the administration of performance measurements and the retrieval of their results. For this purpose, the characteristics of measurement jobs and measurement results have been defined.

The present document explains how these requirements can be met in a GSM system using standard OSI systems management functions or SNMP management operations and, where necessary, tailoring them for GSM PLMN use. In the following, managed object classes and their properties (attributes, notifications, etc.) to be used on the object oriented interface between OS and NEs for the execution of performance management functions are specified.

Note that the implementation of this object oriented approach defined in the following clauses is optional. As an alternative, vendors can also choose to implement their GSM systems or GSM parts of combined GSM/UMTS systems according to the interface definition and requirements specified in TS 32.401 [31], which implies that:

- for measurement administration, the functional requirements are standardised, but technology and details of the implementation are vendor specific;
- for the retrieval of measurement results, only a file based mechanism for transfer of results to a Network Manager is standardised.

# 4.1.1 Basic measurement system functions

Before measurement data from the NEs can be collected and the results be forwarded to the OS, the measurement jobs that generate the required data shall be activated in the system. In object oriented terms, this corresponds to the instantiation of managed objects which model the measurement process. In order to control the measurement process, appropriate attributes of these objects shall be defined and have to be set to the required/desired values, either when the objects are created or during the lifetime of the objects. The specific attributes and their values will determine the measurement schedule, the measured network resources, the measurement types and the generation of scheduled result reports as well as the layout of the reports. Scheduled results can be forwarded to the OS using a notification that is defined specifically for this purpose as a part of the measurement object class definitions. A dedicated action will be used for requesting current results of active measurements.

# 4.1.2 Measurement Object Administration

The management of objects in an open system is performed utilising the internationally standardised "Common Management Information Service Element" (CMISE ITU-T Recommendation X.710 [13] or IETF RFC 1157 [30]). Managed objects for the execution of PLMN performance measurement functions can be instantiated and deleted using the M-CREATE and M-DELETE services or SNMP SET and GET operations. Reading and modifying attributes of these objects can be achieved employing the M-GET and M-SET services of CMISE or SET and GET operations of SNMP. The CMISE M-EVENT-REPORT service and SNMP TRAP is defined for the emission of notifications, while actions can be executed using the M-ACTION service.

Specific notifications defined in the OSI object management function (see ITU-T Recommendation X.730 [15]) are used to notify the OS of the creation and deletion of managed objects and of the change of attribute values. For the formal definition of the PLMN performance management object model, refer to annex C.

The measurement job can be ideally modelled by the managed object class "simpleScanner" as defined in ITU-T Recommendation X.738 [19]. The "simpleScanner" is derived from the "homogeneousScanner" object class (see ITU-T Recommendation X.738 [19]), which in turn is a specialisation of the "scanner" class of managed objects (see ITU-T Recommendation X.738 [19]). The "simpleScanner" object has attributes to determine:

- the measurement types;
- the measured network resources;
- the recording periods; and

- the reporting requirements;

of the measurement job. The "simpleScanner" generates measurement result reports in the form of notifications, according to the attributes that prescribe the reporting requirements. The measurement transfer requirements are not modelled in the scanner objects, since generic and general services are used (see clause 4.3.2 and annex D).

# 4.2 Modelling of measurement jobs

A measurement job is represented by a "simpleScanner" object. The following clauses define how the measurement job characteristics are mapped onto the properties of the "simpleScanner" managed object class, and how the measurement types of a measurement job are modelled in the PLMN performance measurement system.

# 4.2.1 Measurement job characteristics

#### 4.2.1.1 Measurement Function

Every measurement job collects measurement data from selected measurement types across one or more network resources of the same type. The selected measurement types shall be identical throughout all network resources observed by a measurement job. For each network resource, the related measurement types have been grouped in one or more measurement functions.

Measurement functions, are modelled by various "measurementFunction" object classes (see annex C). The measurement types for the PLMN performance measurement system are defined in annex B, and their result values are included as attributes in the appropriate "measurementFunction" object class. In case the measurement type is a counter, the attribute represents the counter value as is. In all other cases, the attribute delivers a calculated value (e.g. a mean), over the observed period. The "measurementFunction" objects are contained in the objects that represent the network resource to which the measurement types included in the "measurementFunction" refer. All measurement types that relate only to a network resource alone are grouped into one "measurementFunction" class which is unique for that network resource. Measurement types that are related to the network resource and the same type(s) of adjacent resource(s) (e.g. Handover neighbour cell) are also grouped into one unique type of measurement function which may exist once or more per instance or per set of that adjacent resource(s). The instances of the adjacent resources that are to be addressed by the measurement function are identified by the values of attributes which are part of that specific "measurementFunction" object class definition.

Measurement types that belong together are grouped together in the same package (e.g. "immediateAssignmentProcedurePackage" has attributes "attemptedImmediateAssignmentProcedures" and "successfullImmediateAssignmentProcedures" - for details refer to annex C). Since all measurement types defined in annex B may or may not be supported by the system, all packages of a "measurementFunction" which contain measurement attributes are conditional. A "measurementFunction" needs to be created before a "simpleScanner" can scan its attributes, i.e. before actual measurements can be taken. The create request from the OS shall specify the values of attributes that identify adjacent resources (like Handover neighbour cell), if any, but it may not specify any measurement attributes of the "measurementFunction" object. Upon creation of a "measurementFunction" object, the system will determine the measurement packages that are included in the object according to the measurement types the system supports. If multiple instances of the same "measurementFunction" object class are created, the packages included in the various instances may be different from instance to instance since the system may have restrictions on how many measurement packages of the same type it supports. The OS can inquire the measurement types supported by a "measurementFunction" object from the system, by reading the "packages" attribute or the attribute list of the object (see ITU-T Recommendation X.721 [14]). Unlike the former operation, the latter, however, will also return values of the measurement attributes which are not expected to be meaningful at this time (see below). Deletion of the "measurementFunction" will render the measurement types that correspond to the "measurementFunction" attributes unavailable to the OS. Creation and deletion of a "measurementFunction" will be notified to the OS using the object creation and deletion notifications as defined in ITU-T Recommendation X.730 [15].

Each measurement job may collect data from one or more measurement types across one or more network resources, i.e. a "simpleScanner" object may make a choice of one or more "measurementFunction" instances and scan the same set of attributes across all selected measurement functions. For this purpose, it can scope the set of measurement functions that are eligible for inclusion in the observation, and it may select measurement functions using filtering criteria (similar to the concept of scoping and filtering as described in ITU-T Recommendation X.710 [13]). Alternatively, it can use an explicit list of "measurementFunction" objects for scanning. The "simpleScanner" does not explicitly identify the network resource(s) it measures. Instead, this information is derived from the containment relationship between the selected "measurementFunction" instances and the objects that model the network resources,

and, where necessary, through specific attributes of the "measurementFunction" objects that identify adjacent resources. In principle, a "simpleScanner" is able to scan attributes of any defined "measurementFunction", but for the purpose of the present document, each "simpleScanner" instance is only required to scan attributes of "measurementFunction" objects that are contained in the same "xxxFunction" object as the "simpleScanner" itself, where "xxx" stands for "bss", "msc", "hlr", "eir" or "smsc", respectively (see figure C.1).

All measurement attributes of any "measurementFunction" should only be read by a "simpleScanner" that has been instantiated for this purpose. By definition they can be read directly by systems management protocol, but their values are not expected to have any meaning apart from the scan. Therefore, the system will not return the "attribute list" in the create reply, and the "attributeList" will also not be included in the object creation notification.

#### 4.2.1.2 Measurement schedule

The measurement schedule specifies the time frame during which the measurement job will be active. The schedule consist of a measurement start- and stoptime and one or more recording intervals which may repeat on a daily or weekly basis. The semantics of the scheduling parameters are described in clause 3.2.1.2.

All of the above parameters are formally defined as attributes of conditional packages of the "simpleScanner" managed object class. The starttime and stoptime are included in the "duration" package and indicate, if the package is present, the specific point in time at which the "simpleScanner" will become active or inactive, respectively. If the "simpleScanner" is instantiated after the specified starttime, this will have the same effect as if no starttime was specified (see clause 3.2.1.2).

The optional recording intervals, if specified, further restrict the time during which the "simpleScanner" actively collects measurement data within the time frame determined by the duration package. The "dailyScheduling" package may be used to define one or more intervals during each day. Alternatively, the "weeklyScheduling" package can be used to define individual intervals for each day of the week. The recording interval should be a multiple of the granularity period (if non-zero) and the start- and endtimes shall be aligned with granularity period boundaries for the system to accept the values.

It is possible to create several "simpleScanner" objects which scan the same attributes of the same "measurementFunction" instances according to different recording intervals. In this case it is, however, required that these intervals do not overlap. Consequently, if it is required to measure the same measurement type with overlapping schedules, it is necessary to have an appropriate number of instances of the same "measurementFunction" available which all support the required attributes (see clause 4.2.1.1).

For the definition of the syntactical and additional behavioural aspects of the above parameters, refer to ITU-T Recommendation X.721 [14] and ITU-T Recommendation X.738 [19].

#### 4.2.1.3 Granularity period

The granularity period defines the periodicity of the generation of results by a measurement job within the timeframe specified in the scheduling attributes. The granularity period of a measurement job is determined by the value of the "granularityPeriod" attribute of the "simpleScanner". The present document requires, as a minimum, the support of granularity periods of 5, 15, 30 and 60 minutes.

The value of this attribute shall specify the required value in minutes. The underlying International Standards allow the modification of the "granularityPeriod" attribute, but for an implementation claiming conformance to the present document, it is not required that its value be changeable during the lifetime of the "simpleScanner" object. If this value is 60, measurement results will be generated every full hour. If the value is 30, results will be generated every 0 and 30 minutes past the full hour. If the value is 15, result output will occur every 0, 15, 30 and 45 minutes past the full hour, and finally, if the value is 5, the "simpleScanner" will generate output every 5 minutes, synchronised on the full hour. Again, measurement results are only reported at the end of each granularity period within the recording interval. Due to these definitions, synchronisation of granularity periods through the conditional "periodSynchronisationPackage" of the "simpleScanner" is not supported in the scope of the present document.

If periodical generation of results is not required from a "simpleScanner" instance, this can be achieved by specifying the value 0 for the "granularityPeriod" attribute. In this case, it will only be possible to request current measurement results from the "simpleScanner" (see below).

## 4.2.1.4 Scan reports

At the end of each granularity period within the measurement schedule, the "simpleScanner" will emit a "scanReport" notification, defined in ITU-T Recommendation X.738 [19], which contains the measurement results generated by the scanner at the end of that granularity period. The information in the notification shall comprise:

- the managed object class and managed object instance of the "simpleScanner" that emitted the notification, plus the notification type (i.e. "scan report");
- a time stamp that indicates the time at which the measurement results were taken, i.e. the end time of the respective granularity period;
- for each "measurementFunction" object from which measurements were taken by the scanner, a list of measurement attribute values and optional attribute identifiers, plus a suspect flag for each attribute that indicates the validity of the result value. Missing data is indicated in the list. The time stamp that indicates the time offset forward from scan initiation until the value of the measurement attribute was actually taken is not supported in the PLMN measurement system;
- for an incomplete scan the reason why the scan could not be completed.

The definition of the "scanReport" notification in ITU-T Recommendation X.738 [19] provides some flexibility with respect to the actual layout of the report. In the PLMN performance measurement system, the following options can be selected:

- suppressing the reporting of the identification of the "measurementFunction" object from which the measurements reported in the notification were collected. This is only useful when the identification of the "measuremntFunction" can be determined by other means, or if the identification is not required by the OS (e.g. when the statistics are to be calculated);
- omitting the attribute identifiers from the report. In this case, the attribute values are reported in an agreed order, which is defined by an attribute of the "simpleScanner";
- measurement values that are identical throughout all "mesurementFunction" instances from which the scanner takes measurements may be included in the report only once.

ITU-T Recommendation X.738 [19] defines in detail the attributes of the "simpleScanner" which are used to control the above features. Additional options of ITU-T Recommendation X.738 [19] which are not listed here are not supported in the PLMN performance measurement system (see conformance requirements in clause 4.4).

## 4.2.2 Scanner state and status attributes

State and status indicators are defined for the measurement job in clause 3.2.2 of the present document. These are modelled through appropriate attributes which reflect the state and status of the "simpleScanner" object. These attributes are: administrativeState, operationalState and availabilityStatus.

**administrativeState:** the administrativeState attribute is used to suspend and resume the scanning performed by the "simpleScanner". This attribute can be altered by means of CMISE M-SET service or SNMP SET operation for the applicable "simpleScanner" object instance.

**operationalState**: the operationalState attribute represents the operational capability of the scanner to perform it's functions.

**availabilityStatus**: the availabilityStatus attribute reflects whether or not the simpleScanner object instance is active according to the measurement schedule.

Any changes to the values of the administrativeState and the operationalState attributes will be reported to the OS using the "stateChange" notification, as defined in ITU-T Recommendation X.731 [16].

Further details about these attributes can be found in ITU-T Recommendation X.738 [19].

## 4.2.3 Scanner administration

The generic CMISE services M-CREATE, M-DELETE, M-GET and M-SET or SNMP SET and GET, applied to a simpleScanner managed object instance respectively represent creation, deletion, display and modification of a

measurement job. A CMISE M-ACTION primitive or SNMP SET with a specific action type for activating a scan report is defined for the retrieval of the current values of measurement results.

**Creating a "simpleScanner":** a "simpleScanner" can be created by issuing an appropriate M-CREATE request or SNMP SET request. On creation of the object, all attribute values have to be supplied that determine:

- the selection of "measurementFunction" instances and their attributes which shall be measured:
- the schedule of the "simpleScanner"; and
- the reporting requirements;

as defined in previous clauses. The "measurementFunction" objects shall be created before the scanner can be instantiated, and the measurement attributes specified in the scanner shall be present in the selected "measurementFunction" instances, for the scan to return its results. For each object that does not exist, an empty report shall be returned and for each attribute that does not exist, an empty value shall be returned within the report. The relationship between the scan attributes and the scanner is explained in ITU-T Recommendation X.738 [19].

**Modifying "simpleScanner" attributes:** modification of "simpleScanner" attributes may be requested by the OS during the lifetime of a scanner, using the CMISE M-SET or SNMP SET operation. The conditions for modification of attributes of the "simpleScanner" are specified in ITU-T Recommendation X.738 [19], but some additional restrictions, defined in the present document with respect to the changeability of "simpleScanner" attributes, apply in the PLMN performance measurement system.

**Displaying scanner objects:** the system operator can get a list of all "simpleScanner" objects that currently exist in the system, together with all available information as stored in the NE. This information consists of the data that was supplied on creation/modification of the objects and the values of the state and status attributes of the "simpleScanner" objects. The CMISE M-GET or SNMP GET operation can be used to selectively retrieve the required information from the system. For details see ITU-T Recommendation X.710 [13].

**Deleting a "simpleScanner":** a "simpleScanner" instance is automatically deleted by the system when the scheduled endtime is reached and all result reports, either scheduled or on request have been generated. A "simpleScanner" object can also be deleted by manual intervention, utilising the CMISE M-DELETE or SNMP SET operation, at any time. When deleted, the measurement process associated with the scanner is stopped, and all allocated resources are released.

Suspending/resuming scanner operation: on normal operation, the "simpleScanner" collects measurement data from the selected "measurementFunction" objects according to the values of the "simpleScanner" attributes. However, the system operator may decide for some reason to discard temporarily the collection of measurement data (e.g. in case of system overload or congestion, measurement results not used, ...). The system operator therefore is able to suspend scanner operation at any time, setting the administrativeState attribute to "locked". This implies that the "simpleScanner" instance remains in the system, but no measurement gathering and result reporting activities are performed for this scanner. When scanner operation is resumed, i.e. the administrativeState is "unlocked", measurement data collection and result reporting is started again at the next full granularity period within the measurement schedule.

Requesting current measurement result values: the system operator may for some reason be interested in the current values of the measurement results of a particular measurement process, independently of the scheduled data collection and reporting of the respective scanner, e.g. for tracing the increment of some of the measurement attributes. To this aim, the "activateScanReport" CMISE M-ACTION or SNMP GET is used as defined in ITU-T Recommendation X.738 [19]. The action reply will return current results according to the attributes of the scanner that govern the generation of the "scanReport" notification, i.e. the format of the reply is identical to that of scheduled reports generated by the scanner. Any such request does not affect the underlying measurement process, and may only be issued when the scanner is operating according to its schedule and not suspended (i.e. "offduty" not present in the availability status, administrative state equals "unlocked"), otherwise an error will be returned.

# 4.3 Modelling of measurement results

Each measurement produces a result at the end of the granularity period or on request of the OS. Annex B provides for each measurement type a description of the expected measurement result. Annex C contains the formal definition of the attribute that represents the measurement type.

## 4.3.1 Characteristics of the result report

A scheduled result report is generated in the form of a "scanReport" notification. Current measurement results requested by the OS using the "activateScanReport" action will be supplied by the system in the reply to the request. All measurement attributes that are observed by a "simpleScanner" object are included in a single report or action reply, respectively. The layout of the two result reports - notification or action reply - is identical, as far as the contained measurement information is concerned. For details on the result report characteristics, please refer to the previous clauses.

## 4.3.2 Result report transfer control

Result reports from a "simpleScanner" object are either produced according to the measurement schedule (notification) or on receipt of an explicit request (action) from the OS. There are no mechanisms to control the forwarding of the reply to that request (action reply), or to store it in the NE. There are, however, functions to determine the forwarding, local storage in the NE and deferred retrieval of the "scanReport" notification. These functions are described in the following clauses.

The forwarding of notifications can be controlled by the OS via "Event Forwarding Discriminator" (EFD) objects, as defined in ITU-T Recommendation X.734 [17]. For each EFD, the OS can specify a discriminator construct which will be applied as a filter to any event report generated in the system. If an event report passes the filter, a notification will be forwarded to the OS accordingly. The following filter criteria are allowed in an EFD for the PLMN performance measurement system:

- the event type, which allows to enable or disable completely the forwarding of scan report notifications;
- the "simpleScanner" managed object instance, which allows to restrict forwarding of result reports to those that are generated by specific scanner instances;
- the time stamp contained in the scan report ("scanInitiationTime"), which allows to selectively enable the forwarding of result reports that were generated at a specific time or during specific periods of time;
- any operation on the above attributes in any combination.

Measurement result reports can be stored in the NE. This property is modelled through the managed object class "log", as specified in ITU-T Recommendation X.721 [14] and "log control function" as specified in ITU-T Recommendation X.735 [18]. The storage of event reports in the "log" can be controlled through a discriminator construct, similar to the event forwarding control. The present document requires for the "log" discriminator construct the same criteria as for the EFD discriminator construct.

All scan report notifications that pass the discriminator construct of the "log" will create a "scanReportRecord" object which is contained in the log. These records can be retrieved by the OS at any time, as defined in ITU-T Recommendation X.735 [18] and ITU-T Recommendation X.710 [13], using either CMISE, SNMP, FTP or using FTAM (see annex D). The use of FTAM or FTP services is especially suitable for bulk data transfer. From the common procedures defined in GSM TS 12.00 [8] for data transfer in a PLMN, only the method that provides logged information into file(s) can be used for the measurement system. The "resultType" requested in the action will identify the appropriate log instance(s) as the source of the measurement data, and optionally additional filter criteria which determines the actual records to be put into the file(s) can be supplied. The filter criteria that shall be supported are identical to those defined for the discriminator construct of the logs. On receipt of the action, the requested records will be put into one or more files, which will then be made available to the OS. The format of the records in the file shall be according to the definition of the "scanReportRecord" as given in ITU-T Recommendation X.738 [19].

Since all measurement attributes and the identification of the network resource observed by a "simpleScanner" are included in a single attribute of the result reports, it is not possible to filter on the measured resource or the measurement type. If the selective forwarding/logging/retrieval of measurement results referring to individual network resources or individual measurement types is required by the system operator, then "simpleScanner" objects shall be instantiated such that the scanner identity will implicitly identify the measured resource and measurement types, i.e. the scanner attributes should be set such that the scanner observes only the specific resources and/or the specific measurement attributes which shall be filtered, according to the system operator's requirements.

# 4.4 Conformance requirements

In the following clause, conformance requirements for object classes, notifications and actions defined in ITU-T Recommendation X.738 [19] are specified. In cases where requirements in the present document restrict options of ITU-T Recommendation X.738 [19], like e.g. changeability of attribute values, the conditions of the present document shall apply.

## 4.4.1 Simple scanner

The following clause lists the attributes and packages of the "simpleScanner", as defined in ITU-T Recommendation X.738 [19], and those inherited from the "scanner" as defined in ITU-T Recommendation X.738 [19]. It specifies which properties shall be supported to conform with the present document.

#### **MANDATORY PACKAGES:**

#### scannerPackage:

- scannerId: this attribute identifies a "simpleScanner" instance. It is a mandatory attribute of the "simpleScanner" managed object class and will be supported in the PLMN measurement system;
- granularityPeriod: this attribute specifies the granularity period of the scanner, as defined in clause 4.2.1.3. It is a mandatory attribute of the "simpleScanner" managed object class and will be supported in the PLMN measurement system;
- administrativeState and operationalState: (see clause 4.2.2) are mandatory attributes of the "simpleScanner" managed object class and will be supported in the PLMN measurement system. Their semantics are defined in ITU-T Recommendation X.738 [19].

#### homogeneousScannerPackage:

- scanAttributeIdList: this attribute is interrelated with the "numericAttributeIdArray" attribute of the "simpleScannerPackage". It is supported in the PLMN measurement system according to the definitions of clause 4.2.1.4 and ITU-T Recommendation X.738 [19].

#### simpleScannerPackage:

- numericAtributeIdArray: this attribute is interrelated with the "scanAttributeIdList" attribute of the "homogeneousScannerPackage". It is supported in the PLMN measurement system according to the definitions of clause 4.2.1.4 and ITU-T Recommendation X.738 [19];
- suppressObjectInstance: this attribute determines whether or not the object instance of the observed measurement function is included in the measurement results. It is supported in the PLMN measurement system according to the definitions of clause 4.2.1.4 and ITU-T Recommendation X.738 [19];
- activateScanReport: this action is supported in the PLMN measurement system (see below);
- scanReport: this notification is supported in the PLMN measurement system (see below).

#### CONDITIONAL PACKAGES:

#### availabilityStatusPackage:

- availabilityStatus: this attribute is supported in the PLMN measurement system (see clause 4.2.2) according to the definition of ITU-T Recommendation X.738 [19].

#### duration:

- startTime and stopTime: these attributes constitute the start- and stoptime of the scanner. They are supported according to clause 4.2.1.2 and ITU-T Recommendation X.738 [19].

#### dailyScheduling:

- intervalsOfDay: this attribute defines the periods within a day during which the scanner actively collects measurement data. It is supported according to clause 4.2.1.2 and ITU-T Recommendation X.738 [19].

#### weeklyScheduling:

- weekMask: this attribute defines, for each day of the week, the periods during which the scanner actively collects measurement data. It is supported according to clause 4.2.1.2 and ITU-T Recommendation X.738 [19].

#### externalScheduler:

- The support of this package is not required in the PLMN measurement system.

#### periodSynchronisationPackage:

- The support of this package is not required in the PLMN measurement system. Synchronisation of granularity periods is described in clause 4.2.1.3.

#### createDeleteNotificationsPackage:

- This package contains the object creation and object deletion notifications. Both are required in the PLMN measurement system.

#### attributeValueChangeNotificationPackage:

- This package contains the attribute value change notification. It is required in the PLMN measurement system.

#### stateChangeNotificationPackage:

- This package contains the state change notification. It is required in the PLMN measurement system.

#### timeStampReportPackage:

- timeStampReportMode: this attribute specifies the time stamping requirements for the measurement results. The value "1" ("globalTimeStampOnly") shall be used.

## $scoped Selection Package\ and\ managed Object Instance Selection Package:$

- Either one of these packages is present in any scanner instance. The attributes contained in the packages determine the measurement functions selected for observation by the scanner. They are supported according to the definitions of ITU-T Recommendation X.738 [19].

#### timingSelectionPackage:

- The support of this package is not applicable in the PLMN measurement system, since the observed "measurementFunction" managed objects do not contain any time attributes.

#### onceReportAttributeIdListPackage:

onceReportAttributeIdList: this attribute contains a list of attribute identifiers. The values of these attributes shall be included in a result report only once if they are identical throughout all "measurementFunction" objects observed by the "simpleScanner". It may be supported in the PLMN measurement system as an option, see ITU-T Recommendation X.738 [19].

# 4.4.2 Scan report record

The "scanReportRecord" managed object class will be supported in the PLMN measurement system as defined in ITU-T Recommendation X.738 [19] and ITU-T Recommendation X.721 [14].

# 4.4.3 Scan report notification

The "scanReport" notification will be supported in the PLMN measurement system as defined in clause 4.2.1.4 and ITU-T Recommendation X.738 [19].

# 4.4.4 Activate scan report action

In the scope of the present document, there are no specific conformance requirements for the action request. The action reply will be supported according to the requirements for the scan report notification.

# 4.5 Application Context

The Application Context Name of the 12.04 application context shall have the following object identifier value:

{gsm-OM-DomainId gsm-12-04 (4) protocolSupport (1) applicationContext (0) gsm-Management (0)};

and the following object description value:

"gsm12.04 management application context".


The object identifier gsm-OM-DomainId is defined in the GSM 12.30 [11].

# Annex A (informative): Graphical examples

This annex gives some graphical examples to demonstrate how the measurements in annex B, can be combined to express a specific function.

EXAMPLE 1: Authentication and Authentication Set requests.

This diagram shows which measurements in the annex B need to be activated to collect the statistical information for Authentication of a subscriber.

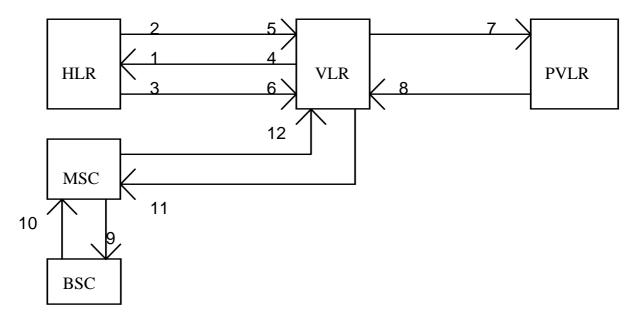


Nbr.	Measurement Attribute Name	Measurement Name
1	attReqForAuthSetsReceivedByHLRFromVLRs	Attempted requests for Authentication sets received by
		HLR from VLRs
2	succReturnedAuthSetsFromHLRToVLRs	Successful returned Authentication sets from HLR to
		VLRs
3	emptyResponsesForAuthSetsFromHLRToVLRs	Empty responses to request for Authentication sets
		from HLR to VLRs
4	attReqForAuthSetsSentToHLR	Attempted requests for Authentication sets sent to HLR
		by the VLRs
5	succReceivedAuthSetsFromHLR	Successful received Authentication sets from the HLR
		to the VLRs
6	emptyResponsesForAuthFromHLR	Empty responses to request for Authentication sets
		from HLR to VLRs
7	attIdentificationReqToPVLRs	Attempted identification requests to PVLRs
8	succIdentificationReqToPVLRs	Successful identification requests to PVLRs
9	attCipheringModeControlProcs	Attempted ciphering mode controlled procedures
10	succCipheringModeControlProcs	Successful ciphering mode controlled procedures
11	attAuthProcsInVLR	Attempted authentication procedures in the VLR
12	succAuthProcsInVLR	Successful authentication procedures in the VLR

**Example 1: Authentication and Authentication Set requests** 

## EXAMPLE 2: Interrogation of HLR for routing.

This diagram shows which measurements in the annex B need to be activated to collect the statistical information for Routing.




Nbr.	Measurement Attribute Name	Measurement Name
1	attInterrogationOfHLRsForRouting	Attempted interrogations of HLRs for routing
2	attReqForMSRN	Attempted request for MSRN
3	succReqForMSRN	Successful request for MSRN
4	succInterrogationOfHLRsMSRNObtained	Successful interrogations of HLR (MSRN obtained)
5	succInterrogationOfHLRsCallForwarding	Successful interrogations of HLR (call forwarding)

**Example 2: Interrogation of HLR for routing** 

#### EXAMPLE 3: Location Updating.

This diagram shows which measurements in the annex B need to be activated to collect the statistical information for Location Updating.

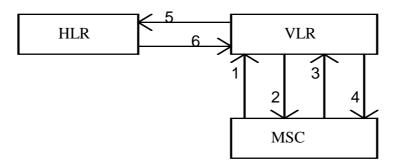

Nbr.	Measurement Attribute Name	Measurement Name
1	attIntraVLRLocationUpdates	Attempted intra-VLR location updates
2	succIntraVLRLocationUpdates	Successful intra-VLR location updates
3	attInterVLRLocationUpdates	Attempted inter-VLR location updates
4	succInterVLRLocationUpdates	Successful inter-VLR location updates
5	attLocationUpdate	Attempted location updates
6	succLocationUpdate	Successful location updates

**Example 3: Location Updating** 

# Annex B (normative): Performance Measurement Requirements Summary

Following is the template used to describe the measurements contained in this annex.

#### A. Description:

- A short explanation of the measurement operation.

#### B. Collection Method:

- The form in which this measurement data is obtained:
  - **CC** (Cumulative Counter);
  - GAUGE (dynamic variable), used when data being measured can vary up or down during the period of measurement;
  - **DER** (Discrete Event Registration), when data related to a particular event are captured every nth event is registered, where n can be 1 or larger;
  - SI (Status Inspection).

#### C. Condition:

- The GSM condition which causes this measurement data to be updated. Where it is not possible to give a precise GSM condition, then the conditional circumstances leading to the update is stated.

#### D. Measurement Attribute Name:

- The Measurement Attribute Name which will be referenced by the Object Model.
- E. Measurement Result (measured value, Unit):
  - A short description of expected result value (e.g. A single integer value).

#### F. Measurement Function Name:

- Measurement Function Name for which this measurement is defined.

#### G. Switching Technology:

- The Switching product this Measurement is applicable to. Circuit Switched and/or Packet Switched (GPRS). When packet switching (GPRS) is identified for an MSC measurement function, this measurement type is related to a combined circuit/packet switched event.

# B.1 Measurements Related to the BSC

## B.1.1 BSC Measurement Function

# B.1.1.1 Unsuccessful requests for service

A. This measurement provides the number of unsuccessful mobile originated services for the BSC.

NOTE: The "reject cause" indicates why the service request was rejected. Possible causes include, B-Subscriber busy, network out of order, protocol errors.

- B. CC.
- C. Transmission of "CM-SERVICE REJECT" Message to MS requesting service (GSM 04.08 [2]).
- D. unsuccReqsForService.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for circuit switching.

## B.1.1.2 Unsuccessful requests for service, per cause

A. This measurement provides the number of unsuccessful mobile originated services for the BSC per cause.

NOTE: The "reject cause" indicates why the service request was rejected. Possible causes include, B-Subscriber busy, network out of order, protocol errors.

- B. CC.
- C. Transmission of "CM-SERVICE REJECT" Message to MS requesting service (GSM 04.08 [2]).
- D. unsuccReqsForServicePerCause.
- E. An integer value per cause.
- F. BSC Measurement Function.
- G. Valid for circuit switching.

# B.1.1.3 Mean Inter-arrival Time (Circuit Switched)

- A. This measurement provides the arithmetic mean of the sum of time intervals between consecutive mobile originating call attempts.
- B. CC.
- C. This measurement is obtained by accumulating the time segments between receipt of consecutive access Message on the RACH with establishment cause "MOBILE ORIGINATING CALL" and then taking the arithmetic mean (GSM 04.08 [2]).
- D. meanInterArrivalTime
- E. A single real value.
- F. BSC Measurement Function.
- G. Valid for circuit switching.

# B.1.1.4 Attempted Transmission of Paging Messages, per BSC

- A. This measurement provides the number of Paging messages transmitted, on a per BSC basis (these are counted as attempts).
- B. CC.
- C. Transmission of "PAGING REQUEST" (GSM 04.08 [2]).
- D. attTransOfPagingMessagesPerBSC.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for circuit and packet switching.

## B.1.1.5 Unsuccessful Transmission of Paging Messages, per BSC

- A. This measurement provides the number of unsuccessful Paging requests, on a per BSC basis.
- B. CC.
- C. No "PAGING RESPONSE" received for the "PAGING REQUEST", expiry of timer T3113 (GSM 04.08 [2]).
- D. unsuccTransOfPagingMessagesPerBSC.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for circuit and packet switching.

# B.1.1.6 Attempted IMMEDIATE ASSIGNMENT Procedures, per BSC

- A. This measurement provides the number of attempted immediate assignment procedures, on a per BSC basis.
- B. CC.
- C. Receipt of "CHANNEL REQUEST" Message. Note, the establishment causes are: "EMERGENCY CALL", "CALL RE-ESTABLISHMENT", "ANSWER TO PAGING", "ORIGINATING CALL", "LOCATION UPDATING", "ONE PHASE PACKET ACCESS", "SINGLE BLOCK PACKET ACCESS" and "OTHER PROCEDURES" as defined in (GSM 04.08 [2]).
- D. attImmediateAssingProcsPerBSC.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for circuit and packet switching.

### B.1.1.7 Successful IMMEDIATE ASSIGNMENT Procedures, per BSC

- A. This measurement provides the number of successful immediate assignment procedures, on a per BSC basis.
- B. CC.
- C. Transmission of "IMMEDIATE ASSIGN COMMAND" Message. This Message contains either an "IMMEDIATE ASSIGNMENT" Message or an "IMMEDIATE ASSIGNMENT EXTENDED" Message. If an "IMMEDIATE ASSIGNMENT EXTENDED" Message is transmitted, the counter shall be incremented by two, because that Message contains assignment information for two mobiles (GSM 04.08 [2]).
- D. succImmediateAssingProcsPerBSC.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for circuit and packet switching.

#### B.1.1.8 Successful Internal Handovers, intra-CELL, per BSC

- A. This measurement provides the number of times a call moves from the occupied channel of the CELL to another free channel of the same CELL, on a per BSC basis.
- B. CC.
- C. Transmission of a "HANDOVER PERFORMED" Message to the MSC (GSM 08.08 [5]).
- D. succInternalHDOsIntraCellPerBSC.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for circuit switching.

## B.1.1.9 Unsuccessful Internal Handovers, intra-CELL, per BSC

- A. This measurement provides the number of unsuccessful intra CELL Handovers, i.e. an attempt was made to move a call from the occupied channel of the CELL to another free channel of the same CELL, on a per BSC basis.
- B. CC.
- C. Receipt of "ASSIGNMENT FAILURE" Message for the attempted handover (GSM 04.08 [2]).
- D. unsuccInternalHDOsIntraCellPerBSC.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for circuit switching.

### B.1.1.10 Successful Internal Handovers per BSC

- A. This measurement provides the number of successful Handovers on a per BSC basis, it includes intra-CELL as well as inter-CELL Handovers.
- B. CC.
- C. Transmission of a "HANDOVER PERFORMED" Message to the MSC (GSM 08.08 [5]).
- D. succInternalHDOsPerBSC.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for circuit switching.

### B.1.1.11 Successful Internal Handovers per cause

- A. This measurement provides the number of successful Handovers per cause, it includes intra-CELL as well as inter-CELL Handovers.
- B. CC.
- C. Transmission of a "HANDOVER PERFORMED" Message to the MSC (GSM 08.08 [5]).
- D. succInternalHDOsPerCause.
- E. An integer value per Handover cause.
- F. BSC Measurement Function.
- G. Valid for circuit switching.

# B.1.1.12 Unsuccessful Internal Handovers with reconnection to old channels, per BSC

- A. This measurement provides the number of unsuccessful Handovers, on a per BSC basis (with reconnection to the original channels).
- B. CC.
- C. Receipt of "HANDOVER FAILURE" Message for the attempted handover (GSM 04.08 [2]).
- D. unsuccInternalHDOsWithReconnectionPerBSC.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for circuit switching.

### B.1.1.13 Unsuccessful Internal Handovers with loss of connection, per BSC

- A. This measurement provides the number of unsuccessful Handovers that end in loosing the call, on a per BSC basis.
- B. CC.
- C. Expiry of timer T3103 for Inter CELL Handovers and Expiry of timer T3107 for Intra CELL Handovers (GSM 04.08 [2]).
- D. unsuccInternalHDOsWithLossOfConnectionPerBSC.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for circuit switching.

#### B.1.1.14 Flush Requests Received

- A. This measurement provides the total number of flush request messages received from the SGSN to flush the PDUs for a given cell.
- B. CC.
- C. Update count for each receipt of a PDU flush request message from the SGSN.
- D. flushReqReceived.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for packet switching.

# B.1.1.15 Paging Requests Received from SGSN

- A. This measurement provides the total number of "PAGING" messages received by the BSS from the SGSN.
- B. CC.
- C. Update count for each receipt of a "PAGING" message by the BSS from the SGSN.
- D. pagingReqReceivedfromSGSN.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for packet switching.

#### B.1.1.16 Mean Inter-arrival Time (Packet Switched)

- A. This measurement provides the arithmetic mean of the sum of time intervals between consecutive mobile originating packet channel access request.
- B. CC.
- C. This measurement is obtained by accumulating the time segments between receipt of consecutive 'PACKET CHANNEL REQUEST' message with the establishment cause being either one phase packet access or single block packet access, on the PRACH and then taking the arithmetic mean 3GPP TS 44.060 [23].
- D. meanPSInterArrivalTime
- E. A single real value.
- F. BSC Measurement Function.
- G. Valid for packet switching.

#### B.1.1.17 Number of octets of uplink BSSGP PDUs

- A. This measurement provides the number of octets of uplink BSSGP PDUs on Gb interface.
- B. CC.
- C. On transmission by the BSC of a PDU (type is UL-UNITDATA) on the BSSGP layer. The number of octets of BSSGP layer on Gb interface is calculated by sum of octets length in each BSSGP PDU header including BSSGP PDU header. See TS 48.018 [34].
- D. NbrULBssgpOct.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for packet switched traffic.

#### B.1.1.18 Number of octets of downlink BSSGP PDUs

- A. This measurement provides the number of octets of downlink BSSGP PDUs on Gb interface.
- B. CC.
- C. On receipt by the BSC of a PDU (type is DL-UNITDATA) on the BSSGP layer. The number of octets of BSSGP layer on Gb interface is calculated by sum of octets length in each BSSGP PDU header including BSSGP PDU header. See TS 48.018 [34].
- D. NbrDLBssgpOct.
- E. A single integer value.
- F. BSC Measurement Function.
- G. Valid for packet switched traffic

# B.2 Measurements related to the BTS

#### B.2.1 CELL Measurement Function

### B.2.1.1 Mean PCH-AGCH queue length

- A. This measurement provides the arithmetic mean of the number of all messages waiting for transmission on the PCH-AGCH. Note: this is valid for circuit only when a PCCCH is provided.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the PCH-AGCH queue length and then taking the arithmetic mean (GSM 04.08 [2]).
- D. meanPCHAGCHQueueLength.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

#### B.2.1.2 Attempted Transmission of Paging Messages (the PCH)

- A. This measurement provides the number of Paging messages transmitted (these are counted as attempts). Note: this is valid for circuit only when a PCCCH is provided.
- B. CC.
- C. Transmission of "PAGING REQUEST" (GSM 04.08 [2]).
- D. attTransOfPagingMessagesThePCH.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

## B.2.1.3 Unsuccessful Transmission of Paging Messages (the PCH)

- A. This measurement provides the number of unsuccessful Paging requests.
- B. CC.
- C. No "PAGING RESPONSE" received for the "PAGING REQUEST", expiry of timer T3113 (GSM 04.08 [2]). Note: this is valid for circuit only when a PCCCH is provided.
- D. unsuccTransOfPagingMessagesThePCH.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

#### B.2.1.4 Attempted IMMEDIATE ASSIGNMENT Procedures

- A. This measurement provides the number of attempted immediate assignment procedures.
- B. CC.
- C. Receipt of "CHANNEL REQUIRED" Message. Note, the establishment causes are: "EMERGENCY CALL", "CALL RE-ESTABLISHMENT", "ANSWER TO PAGING", "ORIGINATING CALL", "LOCATION UPDATING", "ONE PHASE PACKET ACCESS", "SINGLE BLOCK PACKET ACCESS" and "OTHER PROCEDURES" as defined in (GSM 04.08 [2]).
- D. attImmediateAssingProcs.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

#### B.2.1.5 Successful IMMEDIATE ASSIGNMENT Procedures

- A. This measurement provides the number of successful immediate assignment procedures.
- B. CC.
- C. Transmission of "IMMEDIATE ASSIGN COMMAND" Message. This message contains either an "IMMEDIATE ASSIGNMENT" Message or an "IMMEDIATE ASSIGNMENT EXTENDED" Message. If an "IMMEDIATE ASSIGNMENT EXTENDED" Message is transmitted, the counter shall be incremented by two, because that Message contains assignment information for two mobiles (GSM 04.08 [2]).
- D. succImmediateAssingProcs.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

# B.2.1.6 Attempted IMMEDIATE ASSIGNMENT Procedures, per cause

- A. This measurement provides the number of attempted immediate assignment procedures, per cause.
- B. CC.
- C. Receipt of "CHANNEL REQUIRED" Message. Note, the establishment causes are: "EMERGENCY CALL", "CALL RE-ESTABLISHMENT", "ANSWER TO PAGING", "ORIGINATING CALL", "LOCATION UPDATING" and "OTHER PROCEDURES" as defined in (GSM 04.08 [2]).
- NOTE: System implementation will allow the establishments causes of **PS** \*\*\* **Att IMM ASS Poc** can be incorporated in this measurement.
- F. attImmediateAssingProcsPerCause.
- G. An integer value per cause.
- H. CELL Measurement Function.
- I. Valid for circuit and packet switching.

#### B.2.1.7 Successful IMMEDIATE ASSIGNMENT Procedures, per cause

- A. This measurement provides the number of successful immediate assignment procedures, per cause.
- B. CC.
- C. Transmission of "IMMEDIATE ASSIGN COMMAND" Message. This Message contains either an "IMMEDIATE ASSIGNMENT" Message or an "IMMEDIATE ASSIGNMENT EXTENDED" Message, per cause. Note, the establishment causes are: "EMERGENCY CALL", "CALL RE-ESTABLISHMENT", "ANSWER TO PAGING", "ORIGINATING CALL", "LOCATION UPDATING" and "OTHER PROCEDURES". The "IMMEDIATE ASSIGNMENT EXTENDED" Message contains assignment information for two mobiles (GSM 04.08 [2]). If the establishment cause is identical for the two mobile stations, the counter shall be incremented by two. Otherwise the affected counters shall be incremented by one.

NOTE: System implementation will allow the establishments causes of **PS** \*\*\* **Att IMM ASS Poc** can be incorporated in this measurement.

- D. succImmediateAssingProcsPerCause.
- E. An integer value per cause.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

#### B.2.1.8 Number of Pages Discarded from the PCH Queue

- A. This measurement provides the number of Paging messages which are discarded from the PCH queue before they could be transmitted.
- B. CC.
- C. Pages can be discarded from the queues (assuming queuing is in operation) for a number of reasons, including queue overflow, priority insertion in the queue causing an overflow and in-queue timer expiry (GSM 04.08 [2]).

NOTE: This is valid for circuit only when a PCCCH is provided.

- D. nbrOfPagesDiscardedFromPCHQueue.
- E. An integer value for the paging queue in the CELL.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

# B.2.1.9 Mean duration of a successful Paging Procedure

- A. This measurement provides the arithmetic mean duration of a successful Paging procedure, i.e. from transmission of the page request towards the MS and receipt of a positive response.
- B. CC.
- C. An accumulation is performed for the time taken by each Paging procedure during the granularity period and an arithmetic mean is taken from the observed values. The measured time will be between Transmission of a "PAGING REQUEST" service request to Receipt of "PAGING RESPONSE" service confirmation (GSM 04.08 [2]).
- D. meanDurationOfSuccPagingProcs.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

#### B.2.1.10 Number of Time Slots Available for Traffic (Previously TCHs)

- A. This measurement provides the number of TS which are available for use by either CS or PS traffic(including those which are actually in use).
- B. GAUGE.
- C. The gauge will be incremented when the TS becomes available and decremented when it becomes unavailable. The TS is available when its administrative state is "unlocked" or "shuttingdown" and the operational state is "enabled", and is unavailable when its administrative state changes to "locked" or operational state changes to "disabled". The gauge value equals the number of TS with an administrative state of "unlocked" or "shuttingdown" and an operational state of "enabled", (GSM 04.08 [2]).
- D. nbrOfAvailableTCHs.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

## B.2.1.11 Mean number of busy Time Slots Occupied by Circuit Traffic

- A. This measurement provides the arithmetic mean number of TS which are simultaneously in use for CS traffic (TCHs).
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the number of TS which are carrying circuit traffic (TCHs) and then taking the arithmetic mean (GSM 04.08 [2]).
- D. meanNbrOfBusyTCHs.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

## B.2.1.12 Maximum number of busy Time Slots Occupied by Circuit Traffic

- A. This measurement provides the highest recorded value for the number of TS simultaneously in use for Circuit switched traffic.
- B. GAUGE.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the number of TSs which are "busy", and then taking the maximum of all such values at the end of the granularity period. A TS is busy between an "ASSIGNMENT COMPLETE" Message and the complementary "RELEASE" Message, (GSM 04.08 [2]).
- D. maxNbrOfBusyTCHs.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

# B.2.1.13 Mean number of idle Time Slots per interference band (Previously TCHs)

- A. This measurement provides the arithmetic mean of the number of idle TS per interference band. The TS is said to be idle if it can be allocated for a request. Idle TS are allocated in five classes (GSM 05.01) depending on the measured interference level.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the number of idle TS per interference band and then taking the arithmetic mean (GSM 04.08 [2]).
- D. meanNbrOfIdleTCHsPerInterferenceBand.
- E. A real value per interference band.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

#### B.2.1.14 Attempted Time Slots seizures (Previously TCHs)

- A. This measurement provides the number of attempted TS seizures.
- B. CC.
- C. Transmission of "ASSIGNMENT COMMAND" Message to the MS, (GSM 04.08 [2]).
- D. attTCHSeizures.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

# B.2.1.15 Successful TCH/PDTCH seizures (Previously TCHs)

- A. This measurement provides the number of successful TCH/PDTCH seizures.
- B. CC.
- C. Receipt of "ASSIGNMENT COMPLETE" Message from the MS, (GSM 04.08 [2]).
- D. succTCHSeizures.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit and packet switching.

## B.2.1.16 Attempted TCH Seizures meeting an TCH blocked state

- A. This measurement provides the number of attempted TCH seizures meeting all busy TCH state.
- B. CC.
- C. Receipt of "SETUP" Message from the MS meeting all TCH busy state (GSM 04.08 [2]).
- D. attTCHSeizuresMeetingTCHBlockedState.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

#### B.2.1.17 All Available TCH Allocated Time

- A. This measurement provides the accumulated time during the granularity period when all available Time slots available for CS traffic were in use or otherwise unavailable to be allocated.
- B. CC.
- C. Each time segment represents the elapsed time from the last available TS being allocated to the next occurrence of a release of a TCH, so making it available for allocation. The allocation event can be for any reason e.g. new call, Handover and is represented by an "ASSIGNMENT COMPLETE" Message. These time segments are accumulated to give a single total (GSM 04.08 [2]).
- D. allAvailableTCHAllocatedTime.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

# B.2.1.18 Mean busy time of allocated CS Time Slots

- A. This measurement provides the arithmetic mean of the busy time of the maximum number of Time slots allocated for CS TCHs in a CELL.
- B. SI.
- C. This measurement is obtained by accumulating each Timeslots busy time. A TS is considered busy when it carries one or more TCHs, i.e. between an "ASSIGNMENT COMPLETE" Message and the complementary "RELEASE" Message for those TCHs. All values are added up and divided by the number of TS (maximum allocated for circuit on this Cell) at the end of the granularity period to obtain the arithmetic mean. (Further information can be found in GSM 04.08 [2]).
- D. meanTCHBusyTime.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

### B.2.1.19 Mean TCH queue length

- A. This measurement provides the arithmetic mean of the number of queued TCH assignment procedures.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the TCH queue length and then taking the arithmetic mean (GSM 04.08 [2]).
- D. meanTCHQueueLength.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

### B.2.1.20 Number of lost Radio links while using a TCH

- A. This measurement provides the number of calls terminated due to RF failure on the radio path.
- B. CC.
- C. A local end release due to a "RADIO LINK FAILURE" experienced by the BTS when using a TCH (GSM 05.08 [4]).
- D. nbrOfLostRadioLinksTCH.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

#### B.2.1.21 Number of Available SDCCHs

- A. This measurement provides the number of SDCCHs which are available to be used (including those actually in use).
- B. GAUGE.
- C. The gauge will be incremented when the SDCCH becomes available and decremented when it becomes unavailable. The SDCCH is available when its administrative state is "unlocked" or "shuttingdown" and the operational state is "enabled", and is unavailable when its administrative state changes to "locked" or operational state changes to "disabled". The gauge value equals the number of SDCCHs with an administrative state of "unlocked" or "shuttingdown" and an operational state of "enabled", (GSM 04.08 [2]).
- D. nbrOfAvailableSDCCHs.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

## B.2.1.22 Mean number of busy SDCCHs

- A. This measurement provides the arithmetic mean of the number of SDCCHs which are simultaneously in use.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the SDCCHs which are busy and then taking the arithmetic mean (GSM 04.08 [2]).
- D. meanNbrOfBusySDCCHs.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

## B.2.1.23 Maximum number of busy SDCCHs

- A. This measurement provides the highest recorded value for the number of SDCCHs simultaneously in use.
- B. GAUGE.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the number of SDCCHs which are "busy", and then taking the maximum of all such values at the end of the granularity period, (GSM 04.08 [2]).
- D. maxNbrOfBusySDCCHs.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

# B.2.1.24 Attempted SDCCH Seizures meeting an SDCCH blocked state

- A. This measurement provides the number of attempted SDCCH seizures meeting all busy SDCCH state.
- B. CC.
- C. Receipt of "CHANNEL REQUEST" Message from the MS sent on the RACH meeting all SDCCH busy state (GSM 04.08 [2]).
- D. attSDCCHSeizuresMeetingSDCCHBlockedState.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

#### B.2.1.25 All Available SDCCH Allocated Time

- A. This measurement provides the accumulated time during the granularity period when all available SDCCHs are in use or otherwise unavailable to be allocated.
- B. CC.
- C. Each time segment represents the elapsed time from the last available SDCCH being allocated to the next occurrence of a release of a SDCCH, so making it available for allocation. The allocation event can be for any reason e.g. new call, Handover, and is represented by a SABM Message. These time segments are accumulated to give a single total (GSM 04.08 [2]).
- D. allAvailableSDCCHAllocatedTime.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

### B.2.1.26 Mean SDCCH queue length

- A. This measurement provides the arithmetic mean of the number of all messages waiting for transmission on the SDCCH.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the SDCCH queue length and then taking the arithmetic mean (GSM 04.08 [2]).
- D. meanSDCCHQueueLength.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

# B.2.1.27 Number of lost Radio links while using an SDCCH

- A. This measurement provides the number of RF failure while using the SDCCH.
- B. CC.
- C. A local end release, due to a "RADIO LINK FAILURE", experienced by the BTS when using an SDCCH (GSM 08.58 [6]).
- D. nbrOfLostRadioLinksSDCCH.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

### B.2.1.28 Relative time downlink power control at maximum

- A. This measurement provides the time downlink power control was running at maximum level for the busy TCHs over the measured period, relative to the total TCH busy time.
- B. CC.
- C. Each time segment represents the elapsed time when BS\_TXPWR\_MAX is at maximum for each busy TCH. These time segments are accumulated to give a single total. From this information a value is derived such that it reflects a percentage of the total channel busy time, (GSM 05.08 [4]).
- D. relativeTimeDLPowerControlAtMax.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

#### B.2.1.29 Relative time uplink power control at maximum

- A. This measurement provides the time uplink power control was running at maximum level for the seized TCHs over the measured period, relative to the total TCH busy time.
- B. CC.
- C. Each time segment represents the elapsed time when MS\_TXPWR\_MAX is at maximum for each busy TCH. These time segments are accumulated to give a single total. From this information a value is derived such that it reflects a percentage of the total channel busy time, (GSM 05.08 [4]).
- D. relativeTimeULPowerControlAtMax.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

#### B.2.1.30 Successful Internal Handovers, intra-CELL

- A. This measurement provides the number of times a call moves from the occupied channel of the CELL to another free channel of the same CELL.
- B. CC.
- C. Transmission of "HANDOVER PERFORMED" Message to the MSC (GSM 08.08 [5]).
- D. succInternalHDOsIntraCell.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

#### B.2.1.31 Unsuccessful Internal Handovers, intra-CELL

- A. This measurement provides the number of unsuccessful intra CELL Handovers, i.e. an attempt was made to move a call from the occupied channel of the CELL to another free channel of the same CELL.
- B. CC.
- C. Receipt of "ASSIGNMENT FAILURE" Message for the attempted handover (GSM 04.08 [2]).
- D. unsuccInternalHDOsIntraCell.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

### B.2.1.32 Attempted incoming Internal inter CELL Handovers

- A. This measurement provides the number of attempted incoming Handovers into the observed CELL from the related adjacent CELLs controlled by the same BSC, further information can be found in GSM 04.08 [2], GSM 08.08 [5] and GSM 08.58 [6].
- B. CC.
- C. An occurrence of a BSC internal event, depending on Handover algorithm.
- D. attIncomingInternalInterCellHDOs.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

## B.2.1.33 Successful incoming Internal inter CELL Handovers

- A. This measurement provides the number of successful incoming Handovers into the observed CELL from the related adjacent CELLs controlled by the same BSC.
- B. CC.
- C. Transmission of a "HANDOVER PERFORMED" Message to the MSC (GSM 08.08 [5]).
- D. succIncomingInternalInterCellHDOs.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

## B.2.1.34 Attempted outgoing Internal inter CELL Handovers

- A. This measurement provides the number of attempted outgoing Handovers from the observed CELL to the related adjacent CELLs controlled by the same BSC.
- B. CC.
- C. Transmission of a "HANDOVER COMMAND" Message (GSM 08.08 [5]).
- D. attOutgoingInternalInterCellHDOs.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

### B.2.1.35 Successful outgoing Internal inter CELL Handovers

- A. This measurement provides the number of successful outgoing Handovers from the observed CELL to the related adjacent CELLs controlled by the same BSC.
- B. CC.
- C. Transmission of a "HANDOVER PERFORMED" Message to the MSC (GSM 08.08 [5]).
- D. succOutgoingInternalInterCellHDOs.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

#### B.2.1.36 Unsuccessful Internal Handovers with reconnection to old channels

- A. This measurement provides the number of unsuccessful Handovers (with reconnection to the original channels), for the observed CELL.
- B. CC.
- C. Receipt of "HANDOVER FAILURE" Message received for the attempted handover (GSM 04.08 [2]).
- D. unsuccHDOsWithReconnection.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

#### B.2.1.37 Unsuccessful Internal Handovers with loss of connection

- A. This measurement provides the number of unsuccessful Handovers that end in loosing the speech channel, for the observed CELL.
- B. CC.
- C. Expiry of timer T3103 for Inter CELL Handovers and Expiry of timer T3107 for Intra CELL Handovers (GSM 04.08 [2]).
- D. unsuccHDOsWithLossOfConnection.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for circuit switching.

#### B.2.1.38 Number of Available PDCH

- A. This measurement provides the current number of PDCHs which are available to be used (including those actually in use).
- B. GAUGE.
- C. The gauge will be incremented when the PDCH becomes available and decremented when it becomes unavailable. The PDCH is available when its administrative state is "unlocked" or "shuttingdown" and the operational state is "enabled", and is unavailable when its administrative state changes to "locked" or operational state changes to "disabled". The gauge value equals the number of PDCHs with an administrative state of "unlocked" or "shuttingdown" and an operational state of "enabled".
- D. availablePDCH.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for packet switching.

#### B.2.1.39 Mean Number of Available PDCH

- A. This measurement provides the mean number of PDCHs which are available to be used (including those actually in use) over the measured period.
- B. GAUGE.
- C. The gauge will be incremented when the PDCH becomes available and decremented when it becomes unavailable. The PDCH is available when its administrative state is "unlocked" or "shuttingdown" and the operational state is "enabled", and is unavailable when its administrative state changes to "locked" or operational state changes to "disabled". The gauge value equals the number of PDCHs with an administrative state of "unlocked" or "shuttingdown" and an operational state of "enabled".
- D. meanNbrAvailablePDCH
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for packet switching.

#### B.2.1.40 Maximum Number of Available PDCH

- A. This measurement provides the maximum number of PDCHs which are available to be used (including those actually in use) over the measured period.
- B. GAUGE.
- C. The gauge will be incremented when the PDCH becomes available and decremented when it becomes unavailable. The PDCH is available when its administrative state is "unlocked" or "shuttingdown" and the operational state is "enabled", and is unavailable when its administrative state changes to "locked" or operational state changes to "disabled". The gauge value equals the number of PDCHs with an administrative state of "unlocked" or "shuttingdown" and an operational state of "enabled".
- D. maxNbrAvailablePDCH.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for packet switching.

#### B.2.1.41 Minimum Number of Available PDCH

- A. This measurement provides the minimum number of PDCHs which are available to be used (including those actually in use) over the measured period.
- B. GAUGE.
- C. The gauge will be incremented when the PDCH becomes available and decremented when it becomes unavailable. The PDCH is available when its administrative state is "unlocked" or "shuttingdown" and the operational state is "enabled", and is unavailable when its administrative state changes to "locked" or operational state changes to "disabled". The gauge value equals the number of PDCHs with an administrative state of "unlocked" or "shuttingdown" and an operational state of "enabled".
- D. minNbrAvailablePDCH.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for packet switching.

# B.2.1.42 Mean number of occupied PDCHs

NOTE: This measurement is subject to the "2 out of 3 approach".

- A. This measurement provides the arithmetic mean number of occupied PDCHs.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the number of PDCHs which are carrying packet traffic and then taking the arithmetic mean (3GPP TS 44.060 [23]).
- D. meanNbrOfOccPDCHs.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for packet switching.

### B.2.1.43 Maximum number of occupied PDCHs

- A. This measurement provides the highest recorded value for the number occupied by PDCHs.
- B. GAUGE.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the maximum number of PDCHs which are carrying packet traffic. (3GPP TS 44.060 [23]).
- D. maxNbrOfOccPDCHss.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for packet switching.

### B.2.1.44 Minimum number of occupied PDCHs

- A. This measurement provides the lowest recorded value for the number of occupied PDCHs.
- B. GAUGE.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the maximum number of PDCHs which are carrying packet traffic. (3GPP TS 44.060 [23]).
- D. minNbrOfOccPDCHss.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for packet switching.

#### B.2.1.45 All available PDCH allocated time

- A. This measurement gives the total amount of time in the granularity period, where all PDCHs were allocated.
- B. SI.
- C. This time is computed with starting time when the last PDCH is assigned and the end time when a PDCH is first released.
- D. availablePDCHAllocatedTime.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for packet switching.

### B.2.1.46 Transmission of Packet Paging Messages on the PCCCH

- A. This measurement provides the number of Packet Paging messages transmitted over PCCCH(these are counted as attempts).
- B. CC.
- C. Transmission of "PACKET PAGING REQUEST" (3GPP TS 44.060 [23]).
- D. nbrPacketPagingMessagesPCHOnPCCCH.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for packet switching.

### B.2.1.47 Mean PPCH-PAGCH queue length on PCCCH

- A. This measurement provides the arithmetic mean of the number of all messages waiting for transmission on the PPCH-PAGCH sub channel on the PCCCH.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the PPCH-PAGCH queue length and then taking the arithmetic mean (3GPP TS 44.060 [23]).
- D. meanPPCHPAGCHQueueLengthOnPCCCH.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for packet switching.

# B.2.1.48 Number of Packet Pages Discarded from the PPCH Queue on PCCCH

- A. This measurement provides the number of Packet Paging messages which are discarded from the PPCH queue before they could be transmitted on PCCCH.
- B. CC.
- C. Pages can be discarded from the queues (assuming queuing is in operation) for a number of reasons, including queue overflow, priority insertion in the queue causing an overflow and in-queue timer expiry (3GPP TS 44.060 [23]).
- D. nbrOfPSPagesDiscardedFromPPCHQueueOnPCCCH.
- E. An integer value for the paging queue in the CELL.
- F. CELL Measurement Function.
- G. Valid for packet switching.

#### B.2.1.49 Number of Packet Channel Assignment Requests, per cause

- A. This measurement provides the number of packet channel assignment requests, per cause.
- B. CC.
- C. Receipt of "PACKET CHANNEL REQUEST" message sent from the MS on the PRACH or by the "CHANNEL REQUEST" message sent on the RACH.. Note, the establishment causes are: defined in (GSM 04.08 [2]) for channel request message and (3GPP TS 44.060 [23] for the packet channel request message.
- D. attPCReqAssPerCause.
- E. An integer value per cause.
- F. CELL Measurement Function.
- G. Valid for packet switching.

## B.2.1.50 Successful Packet Channel Assignment Procedures, per cause

- A. This measurement provides the number of successful packet channel assignment procedures, per cause. Note: A packet channel assignment is considered successful when either the "PACKET UPLINK ASSIGNMENT" message or the "IMMEDIATE ASSIGNMENT COMMAND" message is sent.
- B. CC.
- C. Transmission of "IMMEDIATE ASSIGN COMMAND" message on the AGCH or the "PACKET UPLINK ASSIGNMENT" message on the PAGCH. Note, If the message contains assignment information for two mobiles (3GPP TS 44.060 [23]). If the establishment cause is identical for the two mobile stations, the counter shall be incremented by two. Otherwise the affected counters shall be incremented by one.

NOTE: System implementation will allow these establishment causes to be incorporated into B 2.1.7.

- D. succPDTCHAssProcsPerCause.
- E. An integer value per cause.
- F. CELL Measurement Function.
- G. Valid for packet switching.

#### B.2.1.51 Successful PDTCH seizures

- A. This measurement provides the number of successful PDTCH seizures.
- B. CC.
- C. Receipt of the first RLC Block (PDU) on the PDTCH from the MS, (3GPP TS 44.060 [23]).
- D. succPDTCHSeizures.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for Packet switching.

### B.2.1.52 Mean PDTCH queue length

- A. This measurement provides the arithmetic mean of the number of all messages waiting for transmission on the PDTCH.
- B. CC.
- C. This measurement is obtained by sampling at a predefined interval (System design), the PDTCH queue length and then taking the arithmetic mean.
- D. meanPacketQueueLength.
- E. A single real value.
- F. CELL Measurement function.
- G. Valid for packet switching.

#### B.2.1.53 Number of service upgrades/downgrades

- A. With service upgrade and downgrade it is meant a switch from the used coding scheme (CS1, CS2, ...) to another one. This measurement counts the number of these upgrades/downgrades per cell.
- B. CC.
- C. The Trigger Event is a Service upgrade or downgrade for the observed object.
- D. nbrOfServiceChanges.
- E. A single integer value for Upgrades and a single integer value for downgrades.
- F. CELL Measurement function.
- G. Valid for packet switching.

## B.2.1.54 Mean number of occupied PDCHs for GPRS

NOTE: This measurement is subject to the "2 out of 3 approach".

- A. This measurement provides the mean number of occupied PDCHs for GPRS.
- B. SI
- C. This measurement is obtained by sampling at a pre-defined interval the number of PDCHs which are carrying packet traffic for GPRS and then taking the arithmetic mean (TS 44.060 [23]).
- D. A single real value.
- E. MeanNbrGprsOccPDCHs.
- F. CELL Measurement Function.
- G. Valid for packet switched traffic.

### B.2.1.55 Mean number of occupied PDCHs for EGPRS

NOTE: This measurement is subject to the "2 out of 3 approach".

- A. This measurement provides the mean number of occupied PDCHs for EGPRS.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval the number of PDCHs which are carrying packet traffic for EGPRS and then taking the arithmetic mean (TS 44.060 [23]).
- D. A single real value.
- E. MeanNbrEgprsOccPDCHs.
- F. CELL Measurement Function.
- G. Valid for packet switched traffic.

#### B.2.1.56 Mean number of simultaneous GPRS TBF for downlink

- A. This measurement provides the mean number of simultaneous GPRS TBF for downlink.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval the number of simultaneous GPRS TBF and then taking the arithmetic mean.
- D. MeanNbrDLGprsTBF.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for packet switched traffic.

#### B.2.1.57 Mean number of simultaneous EGPRS TBF for downlink

- A. This measurement provides the mean number of simultaneous EGPRS TBF for downlink.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval the number of simultaneous EGPRS TBF and then taking the arithmetic mean.
- D. MeanNbrDLEgprsTBF.
- E. A single real value.
- F. CELL Measurement Function.
- G. Valid for packet switched traffic.

# B.2.1.58 Number of received acknowledged octets of EGPRS block on RLC layer

- A. This measurement provides the number of octets of received by BSS acknowledged octets of EGPRS block on RLC layer.
- B. CC.
- C. On receipt by the BSS of an EGPRS block acknowledged by message PACKET UPLINK ACK on the RLC layer. The number of octets of EGPRS block on RLC layer is calculated by sum of octets length in each EGPRS block. See TS 44.060 [23].
- $D. \ \ Nbr Received Ack Oct Egprs On Rlc.$
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for packet switched traffic.

# B.2.1.59 Number of transmitted octets of EGPRS block on RLC layer acknowledged by mobile

- A. This measurement provides the number of transmitted octets of EGPRS block on RLC layer acknowledged by mobile.
- B. CC.
- C. On receipt by the BSS of message PACKET DOWNLINK ACK for the transmitted an EGPRS block on the RLC layer. The number of octets of EGPRS block on RLC layer is calculated by sum of octets length in each EGPRS block. See TS 44.060 [23].
- D. NbrTransAckOctEgprsOnRlc.
- E. A single integer value.
- F. CELL Measurement Function.
- G. Valid for packet switched traffic.

#### B.2.2 Internal HDO Measurement Function

This measurement function allows Internal Handover information per observed CELL to be collected on a per adjacent originating or target CELL basis. This is achieved by specifying the adjacent originating or target CELL identity as parameter when initiating the Measurement Function.

# B.2.2.1 Attempted incoming Internal inter CELL Handovers per originating CELL

- A. This measurement provides the number of attempted incoming Handovers into the observed CELL from the specified adjacent originating CELL, controlled by this BSC, further information can be found in GSM 04.08 [2], GSM 08.08 [5] and GSM 08.58 [6].
- B. CC.
- C. An occurrence of a BSC internal event, depending on Handover algorithm.
- D. attIncomingInternalInterCellHDOsPerOriginatingCell.
- E. A single integer value for the observed CELL from the originating CELL.
- F. Internal HDO Measurement Function.
- G. Valid for circuit switching.

# B.2.2.2 Successful incoming Internal inter CELL Handovers per originating CELL

- A. This measurement provides the number of successful incoming Handovers into the observed CELL from the specified adjacent originating CELL controlled by this BSC.
- B. CC.
- C. Transmission of a "HANDOVER PERFORMED" Message to the MSC (GSM 08.08 [5]).
- $D.\ succIncomingInternalInterCellHDOsPerOriginatingCell.$
- E. A single integer value for the observed CELL from the originating CELL.
- F. Internal HDO Measurement Function.
- G. Valid for circuit switching.

# B.2.2.3 Attempted outgoing Internal inter CELL Handovers per target CELL

- A. This measurement provides the number of attempted outgoing Handovers from the observed CELL to the specified adjacent target CELL controlled by this BSC.
- B. CC.
- C. Transmission of a "HANDOVER COMMAND" Message (GSM 04.08 [2]).
- $D.\ attOutgoingInternalInterCellHDOsPerTargetCell.$
- E. A single integer value for the observed CELL to the target CELL.
- F. Internal HDO Measurement Function.
- G. Valid for circuit switching.

# B.2.2.4 Successful outgoing Internal inter CELL Handovers per target CELL

- A. This measurement provides the number of successful outgoing Handovers from the observed CELL to the specified adjacent target CELL controlled by this BSC.
- B. CC.
- C. Transmission of a "HANDOVER PERFORMED" Message to the MSC (GSM 08.08 [5]).
- $D.\ succOutgoing Internal InterCell HDOs Per Target Cell.$
- E. A single integer value for the observed CELL to the target CELL.
- F. Internal HDO Measurement Function.
- G. Valid for circuit switching.

# B.3 Measurements Related to the MSC

#### B.3.1 MSC Measurement Function

#### B.3.1.1 Number of class mark updates

- A. This measurement provides the number of classmark updates received from the BSS at the MSC.
- B. CC.
- C. Receipt of "CLASSMARK UPDATE" Message (GSM 08.08 [5]).
- D. nbrOfClassMarkUpdates.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.2 Attempted mobile originating calls

- A. This measurement provides the number of call attempts for mobile originating traffic.
- B. CC.
- C. Receipt of "CM\_SERV\_REQ" Message from the originating MS, with service type set to originating call establishment (GSM 04.08 [2]).
- D. attMobileOriginatingCalls.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

# B.3.1.3 Successful mobile originating calls

- A. This measurement provides the number of successful calls for mobile originating traffic.
- B. CC.
- C. Receipt of "ASSIGNMENT COMPLETE" Message from the originating MS, for the requested mobile originating call (GSM 08.08 [5]).
- NOTE: The "ALERTING" Message from GSM 04.08 [2] is not used as the implementation of it is optional.
- D. succMobileOriginatingCalls.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.4 Answered mobile originating calls

- A. This measurement provides the number of answered calls for mobile originating traffic.
- B. CC.
- C. Receipt of "CONNECT ACKNOWLEDGE" Message from the originating MS, for the requested mobile originating call (GSM 04.08 [2]).
- D. ansMobileOriginatingCalls.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.5 Attempted mobile terminating calls

- A. This measurement provides the number of call attempts for mobile terminating traffic.
- B. CC.
- C. Transmission of "SETUP" Message to the called MS, for the requested mobile terminating call (GSM 04.08 [2]).
- D. attMobileTerminatingCalls.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.6 Successful mobile terminating calls

- A. This measurement provides the number of successful calls for mobile terminating traffic.
- B. CC.
- C. Receipt of "ASSIGNMENT COMPLETE" Message from the called MS, for the requested mobile terminating call (GSM 08.08 [5])
- NOTE: The "ALERTING" Message from GSM 04.08 [2] is not used as the implementation of it is optional.
- D. succMobileTerminatingCalls.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.7 Answered mobile terminating calls

- A. This measurement provides the number of answered calls for mobile terminating traffic.
- B. CC.
- C. Transmission of "CONNECTION ACKNOWLEDGE" Message to the called MS, for the requested mobile terminating call (GSM 04.08 [2]).
- D. ansMobileTerminatingCalls.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.8 Attempted Mobile Emergency calls

- A. This measurement provides the number of emergency call attempts.
- B. CC.
- C. Receipt of "CM\_SERV\_REQ" Message from the originating MS, with service indicator set to emergency call (GSM 04.08 [2]).
- D. attMobileEmergencyCalls.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.9 Successful Mobile Emergency calls

- A. This measurement provides the number of successful emergency calls.
- B. CC.
- C. Receipt of "ASSIGNMENT COMPLETE" Message from the originating MS, for the requested emergency call (GSM 08.08 [5]).
- NOTE: The "ALERTING" Message from GSM 04.08 [2] is not used as the implementation of it is optional.
- D. succMobileEmergencyCalls.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.10 Answered Mobile Emergency calls

- A. This measurement provides the number of answered emergency calls.
- B. CC.
- C. Receipt of "CONNECTION ACKNOWLEDGE" Message from the originating MS, for the requested emergency call (GSM 04.08 [2]).
- D. ansMobileEmergencyCalls.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

#### B.3.1.11 Attempted ciphering mode control procedures

- A. This measurement provides the number of ciphering mode control procedures transmitted (these are counted as attempts).
- B. CC.
- C. Transmission of "CIPHER MODE COMMAND" (GSM 08.08 [5]).
- D. attCipheringModeControlProcs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.12 Successful ciphering mode control procedures

- A. This measurement provides the number of successful ciphering mode control procedures.
- B. CC.
- C. Receipt of "CIPHER MODE COMPLETE" Message (GSM 08.08 [5]).
- D. succCipheringModeControlProcs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.13 Attempted interrogations of HLRs for routing

- A. This measurement provides the number of HLR interrogations by the GMSC with the purpose of routing incoming calls (these are counted as attempts).
- B. CC.
- C. Transmission of a "MAP SEND ROUTING INFORMATION" service request (GSM 09.02 [7]).
- D. attInterrogationOfHLRsForRouting.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.14 Successful interrogations of HLR (MSRN obtained)

- A. This measurement provides the number of successful HLR interrogations, where MSRN is obtained.
- B. CC.
- C. Receipt of "MAP\_SEND\_ROUTING\_INFORMATION" service confirmation containing a "MSRN" parameter value (GSM 09.02 [7]).
- D. succInterrogationOfHLRsMSRNObtained.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.15 Successful interrogations of HLR (call Forwarding)

- A. This measurement provides the number of successful HLR interrogations, by the GMSC for call forwarding.
- B. CC.
- C. Receipt of "MAP\_SEND\_ROUTING\_INFORMATION" service confirmation containing a "Forwarding Data" parameter value (GSM 09.02 [7]).
- D. succInterrogationOfHLRsCallForwarding.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.16 Attempted operations for mobile originating point to point SMs

- A. This measurement provides the number of operations for mobile originating point to point short messages (these are counted as attempts).
- B. CC.
- C. Receipt of "RP-DATA" Message (GSM 04.11 [3]).
- D. attOpForMobileOriginatingPointToPointSMs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.17 Successful operations for mobile originating point to point SMs

- A. This measurement provides the number of successful operations for mobile originating point to point short messages.
- B. CC.
- C. Transmission of "RP-ACK" Message (GSM 04.11 [3]).
- D. succOpForMobileOriginatingPointToPointSMs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.18 Attempted operations for mobile terminating point to point SMs

- A. This measurement provides the number of operations for mobile terminating point to point short messages (these are counted as attempts).
- B. CC.
- C. Transmission of "RP-DATA" Message (GSM 04.11 [3]).
- D. attOpForMobileTerminatingPointToPointSMs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.19 Successful operations for mobile terminating point to point SMs

- A. This measurement provides the number of successful operations for mobile terminating point to point short messages.
- B. CC.
- C. Receipt of "RP-ACK" Message (GSM 04.11 [3]).
- D. succOpForMobileTerminatingPointToPointSMs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.20 Number of transmitted check IMEI request

- A. This measurement provides the number of check IMEI request sent from MSC to the EIR.
- B. CC.
- C. Transmission of "MAP\_CHECK\_IMEI" service request (GSM 09.02 [7]).
- D. nbrOfTransCheckIMEIRequests.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

#### B.3.1.21 Number of white answers in MSC

- A. This measurement provides the number of white answers received from the EIR.
- B. CC.
- C. Receipt of "MAP\_CHECK\_IMEI" service confirmation containing an "equipment status" referring to white listed equipment (GSM 09.02 [7] and GSM 02.16 [1]).
- D. nbrOfWhiteAnsInMSC.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.22 Number of grey answers in MSC

- A. This measurement provides the number of grey answers received from the EIR.
- B. CC.
- C. Receipt of "MAP\_CHECK\_IMEI" service confirmation containing an "equipment status" referring to grey listed equipment (GSM 09.02 [7] and GSM 02.16 [1]).
- D. nbrOfGreyAnsInMSC.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

#### B.3.1.23 Number of black answers in MSC

- A. This measurement provides the number of black answers received from the EIR.
- B. CC.
- C. Receipt of "MAP\_CHECK\_IMEI" service confirmation containing an "equipment status" referring to black listed equipment (GSM 09.02 [7] and GSM 02.16 [1]).
- D. nbrOfBlackAnsInMSC.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

#### B.3.1.24 Number of unknown IMEI answers

- A. This measurement provides the number of unknown IMEI answers received from the EIR.
- B. CC.
- C. Receipt of "MAP\_CHECK\_IMEI" service confirmation with a parameter "user error" referring to unknown equipment (GSM 09.02 [7]).
- D. nbrOfUnknownIMEIAnsInMSC.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.25 Mean time to provide the CALL SETUP service

- A. This measurement provides the arithmetic mean of the time to provide the CALL SETUP service to a requesting MS.
- B. DER.
- C. This measurement is obtained by accumulating the time intervals between "SETUP" and the corresponding "ASSIGNMENT COMPLETE" messages over a granularity period using DER. This end value of the time will then be divided by the number of call set-ups observed in the granularity period to give the arithmetic mean (GSM 04.08 [2] and GSM 08.08 [5]).
- D. meanTimeToCallSetupService.
- E. A single real value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

### B.3.1.26 Mean time to provide the LOCATION UPDATING service

- A. This measurement provides the arithmetic mean of the time to provide the LOCATION UPDATING service to an MS changing Location area.
- B. DER.
- C. This measurement is obtained by accumulating the time interval between "LOCATION UPDATING REQUEST" and the corresponding "LOCATION UPDATING ACCEPT" Message over a granularity period using DER. This end value of the time will then be divided by number of Location Updating requests observed in the granularity period to give the arithmetic mean (GSM 04.08 [2]).
- D. meanTimeToLocationUpdateService.
- E. A single real value.
- F. MSC Measurement Function.
- G. Valid for circuit and packet switching.

# B.3.1.27 Transactions on the MM-layer where subscriber was identified with TMSI

- A. This measurement provides the number of transactions on the MM-layer where the mobile subscriber was identified with his TMSL.
- B. CC.
- C. Any MM-layer transaction which causes the MS to be identified with his TMSI (GSM 04.08 [2]) i.e. CM\_Re-establishment, CM\_Service request, Identity response, IMSI detach indication, Location updating accept, Location updating request, TMSI re-allocation command.
- D. transSubIdentifiedWithTMSI.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

# B.3.1.28 Transactions on the MM-layer where subscriber was identified with IMSI

- A. This measurement provides the number of transactions on the MM-layer where the mobile subscriber was identified with his IMSI.
- B. CC.
- C. Any MM-layer transaction which causes the MS to be identified with his IMSI (GSM 04.08 [2]), i.e. CM\_Reestablishment, CM\_Service request, Identity response, IMSI detach indication, Location updating accept, Location updating request, TMSI re-allocation command.
- D. transSubIdentifiedWithIMSI.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

# B.3.1.29 Attempted TMSI re-allocations

- A. This measurement provides the number of TMSI re-allocation, invoked either explicitly as part of TMSI re-allocation procedure or implicitly as part of Location Update procedure.
- B. CC.
- C. Transmission of "TMSI REALLOCATION COMMAND" Message, or a "LOCATION UPDATING ACCEPT" Message where the MS is identified with TMSI (GSM 04.08 [2]).
- D. attTMSIReallocations.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

#### B.3.1.30 Successful TMSI re-allocations

- A. This measurement provides the number of successfully performed TMSI re-allocations.
- B. CC.
- C. Receipt of "TMSI REALLOCATION COMPLETE" Message (GSM 04.08 [2]).
- D. succTMSIReallocations.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.31 IMSI detach procedures

- A. This measurement provides the number of IMSI procedures that involve a detach within one MSC area, (see BSC Measurement Function for IMSI attach procedures).
- B. CC.
- C. Receipt of "IMSI DETACH INDICATION" Message from the MS (GSM 04.08 [2]).
- D. imsiDetachProcs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit and packet switching.

## B.3.1.32 IMSI attach procedures

- A. This measurement provides the number of IMSI procedures that involve an attach within one MSC area.
- B. CC.
- C. Receipt of "LOCATION UPDATING REQUEST" Message from the MS, indicating an IMSI attach, (GSM 04.08 [2]) (see MSC Measurement Function for IMSI detach procedures).
- D. imsiAttachProcs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching and packet switched.

# B.3.1.33 Attempted incoming External intra-MSC Handovers

- A. This measurement provides the number of attempted incoming Handovers into the observed CELL from the related adjacent CELLs controlled by this MSC.
- B. CC.
- C. Transmission of a "HANDOVER REQUEST" Message to the BSC (GSM 08.08 [5]).
- D. attIncomingExternalIntraMSCHDOs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.34 Successful incoming External intra-MSC Handovers

- A. This measurement provides the number of successful incoming Handovers into the observed CELL from the related adjacent CELLs controlled by this MSC.
- B. CC.
- C. Receipt of a "HANDOVER COMPLETE" Message from the BSC (GSM 08.08 [5]).
- D. succIncomingExternalIntraMSCHDOs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.35 Attempted outgoing External intra-MSC Handovers

- A. This measurement provides the number of attempted outgoing Handovers from the observed CELL to the related adjacent CELLs controlled by this MSC (only first attempt shall be counted).
- B. CC.
- C. Receipt of a "HANDOVER REQUIRED" Message from the BSC (GSM 08.08 [5]).
- D. attOutgoingExternalIntraMSCHDOs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.36 Successful outgoing External intra-MSC Handovers

- A. This measurement provides the number of successful outgoing Handovers from the observed CELL to the related adjacent CELLs controlled by this MSC, further information can be found in GSM 04.08 [2], 08.08 [5], and 08.58 [6].
- B. CC.
- C. Completion of release procedure for the involved channel.
- D. succOutgoingExternalIntraMSCHDOs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.37 Attempted incoming inter-MSC Handovers

- A. This measurement provides the number of attempted incoming Handovers into the observed CELL from the related adjacent CELLs NOT controlled by this MSC.
- B. CC.
- C. Receipt of a "MAP\_PERFORM\_HANDOVER" service indication with target CELL identity equal to the observed CELL (GSM 09.02 [7]).
- D. attIncomingInterMSCHDOs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.38 Successful incoming inter-MSC Handovers

- A. This measurement provides the number of successful incoming Handovers into the observed CELL from the related adjacent CELLs NOT controlled by this MSC.
- B. CC.
- C. Receipt of a "MAP\_SEND\_END\_SIGNAL" service confirmation (GSM 09.02 [7]).
- D. succIncomingInterMSCHDOs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.39 Attempted outgoing inter-MSC Handovers

- A. This measurement provides the number of attempted outgoing Handovers from the observed CELL to the related adjacent CELLs NOT controlled by this MSC.
- B. CC.
- C. Transmission of a "MAP\_PERFORM\_HANDOVER" service request (GSM 09.02 [7]).
- D. attOutgoingInterMSCHDOs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.40 Successful outgoing inter-MSC Handovers

- A. This measurement provides the number of successful outgoing Handovers from the observed CELL to the related adjacent CELLs NOT controlled by this MSC.
- B. CC.
- C. Transmission of "MAP SEND END SIGNAL" service response (GSM 09.02 [7]).
- D. succOutgoingInterMSCHDOs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.41 Attempted subsequent inter-MSC Handovers (back to MSCa)

- A. This measurement provides the number of attempted subsequent inter-MSC Handovers, where the call is handed back to the anchor MSC (MSCa), i.e. the first hand over takes place from MSCa to MSCb then subsequently an attempt is made to hand back to MSCa.
- B. CC.
- C. Receipt of "MAP\_PERFORM\_SUBSEQUENT\_HANDOVER" service indication with target MSC identity equal to MSCa (GSM 09.02 [7]).
- D. attSubsequentInterMSCHDOsMSCa.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.42 Successful subsequent inter-MSC Handovers (back to MSCa)

- A. This measurement provides the number of successful subsequent inter-MSC Handovers, where the call is handed back to the anchor MSC (MSCa). i.e. the first hand over takes place from MSCa to MSCb then the call is subsequently successfully handed back to MSCa.
- B. CC.
- C. Transmission of "MAP\_SEND\_END\_SIGNAL" service response (Handover to MSCa) (GSM 09.02 [7]).
- $D.\ succ Subsequent InterMSCHDOsMSCa.$
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.43 Attempted subsequent inter-MSC Handovers (to MSCc)

- A. This measurement provides the number of attempted subsequent inter-MSC Handovers, where the call is handed over to MSCc, i.e. the first hand over takes place from MSCa to MSCb then subsequently an attempt is made to hand over to MSCc.
- B. CC.
- C. Receipt of "MAP\_PERFORM\_SUBSEQUENT\_HANDOVER" service indication, with target MSC identity equal to MSCc (GSM 09.02 [7]).
- D. attSubsequentInterMSCHDOsMSCc.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.44 Successful subsequent inter-MSC Handovers (to MSCc)

- A. This measurement provides the number of successful subsequent inter-MSC Handovers, where the call is handed over to MSCc, i.e. the first hand over takes place from MSCa to MSCb then the call is subsequently successfully handed over to MSCc.
- B. CC.
- C. Transmission of "MAP\_SEND\_END\_SIGNAL" service response (Handover to MSCc) (GSM 09.02 [7]).
- D. succSubsequentInterMSCHDOsMSCc.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

#### B.3.1.45 External Handovers

- A. This measurement provides the number of attempted MSC controlled Handovers.
- B. CC.
- C. Receipt of a "HANDOVER REQUIRED" Message (GSM 08.08 [5]).
- D. externalHDOs.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.46 External Handovers per cause

- A. This measurement provides the number of attempted MSC controlled Handovers, per cause.
- B. CC.
- C. Receipt of a "HANDOVER REQUIRED" Message (GSM 08.08 [5]).
- D. externalHDOsPerCause.
- E. An integer value per cause.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

# B.3.1.47 Unsuccessful External Handovers with reconnection to old channels, per MSC

- A. This measurement provides the number of unsuccessful Handovers with reconnection to the original channels (TCH & SDCCH), on a per MSC basis.
- B. CC.
- C. Receipt of: "HANDOVER FAILURE" Message for the attempted handover (GSM 08.08 [5]).
- D. unsuccExternHDOsWithReconnectionPerMSC.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

## B.3.1.48 Unsuccessful External Handovers with loss of connection, per MSC

- A. This measurement provides the number of unsuccessful Handovers, with loss of the call, on a per MSC basis.
- B. CC.
- C. Receipt of "CLEAR REQUEST" Message for the requested Handover (GSM 08.08 [5]).
- D. unsuccExternHDOsWithLossOfConnectionPerMSC.
- E. A single integer value.
- F. MSC Measurement Function.
- G. Valid for circuit switching.

#### B.3.2 External HDO Measurement Function

This measurement function allows external Handover information per observed CELL to be collected on a per adjacent originating or target CELL basis. For the external Handovers both the observed CELL and the adjacent originating or target CELL identity has to be specified as the parameter when initiating the Measurement Function.

# B.3.2.1 Attempted incoming External intra-MSC Handovers per originating CELL

- A. This measurement provides the number of attempted incoming Handovers into the observed CELL from the specified adjacent originating CELL, controlled by this MSC.
- B. CC.
- C. Transmission of a "HANDOVER REQUEST" Message to the BSC (GSM 08.08 [5]).
- D. attIncomingExternalIntraMSCHDOsPerOriginatingCell.
- E. A single integer value for the observed CELL from the originating CELL.
- F. External HDO Measurement Function.
- G. Valid for circuit switching.

# B.3.2.2 Successful incoming External intra-MSC Handovers per originating CELL

- A. This measurement provides the number of successful incoming Handovers into the observed CELL from the specified adjacent originating CELL, controlled by this MSC.
- B. CC.
- C. Receipt of a "HANDOVER COMPLETE" Message from the BSC (GSM 08.08 [5]).
- $D.\ succIncoming External IntraMSCHDOs Per Originating Cell.$
- E. A single integer value for the observed CELL from the originating CELL.
- F. External HDO Measurement Function.
- G. Valid for circuit switching.

# B.3.2.3 Attempted outgoing External intra-MSC Handovers per target CELL

- A. This measurement provides the number of attempted outgoing Handovers from the observed CELL to the specified adjacent target CELL, controlled by this MSC (only first attempt shall be counted).
- B. CC.
- C. Receipt of a "HANDOVER REQUIRED" Message from the BSC (GSM 08.08 [5]).
- D. attOutgoingExternalIntraMSCHDOsPerTargetCell.
- E. A single integer value for the observed CELL to the target CELL.
- F. External HDO Measurement Function.
- G. Valid for circuit switching.

## B.3.2.4 Successful outgoing External intra-MSC Handovers per target CELL

- A. This measurement provides the number of successful outgoing Handovers from the observed CELL to the specified adjacent target CELL, controlled by this MSC, further information can be found in GSM 04.08 [2], 08.08 [5], and 08.58 [6].
- B. CC.
- C. Completion of release procedure for the involved channel.
- D. succOutgoingExternalIntraMSCHDOsPerTargetCell.
- E. A single integer value for the observed CELL to the target CELL.
- F. External HDO Measurement Function.
- G. Valid for circuit switching.

## B.3.2.5 Attempted incoming inter-MSC Handovers per originating CELL

- A. This measurement provides the number of attempted incoming Handovers into the observed CELL from the specified adjacent originating CELL, NOT controlled by this MSC.
- B. CC.
- C. Receipt of a "MAP\_PERFORM\_HANDOVER" service indication with target CELL identity equal to the observed CELL (GSM 09.02 [7]).
- D. attIncomingInterMSCHDOsPerOriginatingCell.
- E. A single integer value for the observed CELL from the originating CELL.
- F. External HDO Measurement Function.
- G. Valid for circuit switching.

# B.3.2.6 Successful incoming inter-MSC Handovers per originating CELL

- A. This measurement provides the number of successful incoming Handovers into the observed CELL from the specified adjacent originating CELL, NOT controlled by this MSC.
- B. CC.
- C. Receipt of a "MAP\_SEND\_END\_SIGNAL" service confirmation (GSM 09.02 [7]).
- D. succIncomingInterMSCHDOsPerOriginatingCell.
- E. A single integer value for the observed CELL from the originating CELL.
- F. External HDO Measurement Function.
- G. Valid for circuit switching.

## B.3.2.7 Attempted outgoing inter-MSC Handovers per target CELL

- A. This measurement provides the number of attempted outgoing Handovers from the observed CELL to the specified adjacent target CELL, NOT controlled by this MSC.
- B. CC.
- C. Transmission of a "MAP\_PERFORM\_HANDOVER" service request (GSM 09.02 [7]).
- D. attOutgoingInterMSCHDOsPerTargetCell.
- E. A single integer value for the observed CELL to the target CELL.
- F. External HDO Measurement Function.
- G. Valid for circuit switching.

## B.3.2.8 Successful outgoing inter-MSC Handovers per target CELL

- A. This measurement provides the number of successful outgoing Handovers from the observed CELL to the specified adjacent target CELL, NOT controlled by this MSC.
- B. CC.
- C. Transmission of "MAP\_SEND\_END\_SIGNAL" service response (GSM 09.02 [7]).
- D. succOutgoingInterMSCHDOsPerTargetCell.
- E. A single integer value for the observed CELL to the target CELL.
- F. External HDO Measurement Function.
- G. Valid for circuit switching.

# B.4 Measurements Related to the HLR

### B.4.1 HLR Measurement Function

## B.4.1.1 Number of current MS's Roaming outside HPLMN

- A. This measurement provides the current number of home subscribers roaming outside HPLMN.
- B. GAUGE.
- C. The gauge is updated (increased or decreased) on receipt of a "MAP\_UPDATE\_LOCATION" service indication in the HLR(GSM 09.02 [7]).
- D. nbrOfCurrentMSsRoamingOutsideHPLMN.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

## B.4.1.2 Attempted requests for Authentication sets received by HLR

- A. This measurement provides the number of requests for Authentication sets received by the HLR (these are counted as attempts).
- B. CC.
- C. Receipt of an "MAP\_SEND\_AUTHENTICATION\_INFO" service indication requesting Authentication sets (parameter "AuthenticationSetKind" present GSM 09.02 [7]).
- D. attReqForAuthSetsReceivedByHLR.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

#### B.4.1.3 Successful returned Authentication sets from HLR

- A. This measurement provides the number of successful requests for Authentication sets from the HLR.
- B. CC.
- C. Transmission of an "MAP\_SEND\_AUTHENTICATION\_INFO" service response containing Authentication sets (parameter "AuthenticationSetList" present GSM 09.02 [7]).
- D. succReturnedAuthSetsFromHLR.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

## B.4.1.4 Empty responses to request for Authentication sets from HLR

- A. This measurement provides the number of empty responses sent in response to requests for Authentication sets (the implication is that the destination node will have to reuse old Authentication sets).
- B. CC.
- C. Transmission of an "MAP\_SEND\_AUTHENTICATION\_INFO" service response, no Authentication sets present (GSM 09.02 [7]).
- D. emptyResponsesForAuthSetsFromHLR.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

#### B.4.1.5 Attempted insert subscriber data service

- A. This measurement provides the number of insert subscriber data services sent (these are counted as attempts).
- B. CC.
- C. Transmission of "MAP\_INSERT\_SUBSCRIBER\_DATA" service request (GSM 09.02 [7]).
- D. attInsertSubDataService.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

#### B.4.1.6 Successful insert subscriber data service

- A. This measurement provides the number of successful insert subscriber data services sent.
- B. CC.
- C. Receipt of "MAP\_INSERT\_SUBSCRIBER\_DATA" service indication without "user error" parameter value (GSM 09.02 [7]).
- D. succInsertSubDataService.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

## B.4.1.7 Attempted Location Updates

- A. This measurement provides the number of Location Updates to be performed by the HLR (these are counted as attempts).
- B. CC.
- C. Receipt of "MAP\_UPDATE\_LOCATION" service indication (GSM 09.02 [7]).
- D. attLocationUpdate.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

## B.4.1.8 Successful Location Updates

- A. This measurement provides the number of successfully performed Location Updates in the HLR.
- B. CC.
- C. Transmission of "MAP\_UPDATE\_LOCATION" service response without "user error" parameter value (GSM 09.02 [7]).
- D. succLocationUpdate.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

## B.4.1.9 Attempted SS related operations in HLR

- A. This measurement provides the number of attempted SS related operations.
- B. CC.
- C. Receipt of a MAP service indication of: registerSS, eraseSS, activateSS, deactivateSS, registerPassword, interrogateSS, processSSrequest operations in the HLR, (GSM 09.02 [7]).
- D. attSSRelatedOperationsInHLR.
- E. A single integer value per SS operation.
- F. HLR Measurement Function.
- G. Valid for circuit switching.

## B.4.1.10 Successful SS related operations in HLR

- A. This measurement provides the number of successful SS related operations.
- B. CC.
- C. Transmission of MAP service response to: registerSS, eraseSS, activateSS, deactivateSS, registerPassword, interrogateSS, processSSrequest operations in the HLR without "user error" parameter (GSM 09.02 [7]).
- D. succSSRelatedOperationsInHLR.
- E. A single integer value per SS operation.
- F. HLR Measurement Function.
- G. Valid for circuit switching.

## B.4.1.11 Attempted request for SM routing information

- A. This measurement provides the number of requests for short Message routing information (these are counted as attempts).
- B. CC.
- C. Receipt of "MAP\_SEND\_ROUTING\_INFO\_FOR\_SM" service indication (GSM 09.02 [7]).
- D. attReqForSMRoutingInfo.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

## B.4.1.12 Successful request for SM routing information

- A. This measurement provides the number of successful requests for short Message routing information.
- B. CC.
- C. Transmission of "MAP\_SEND\_ROUTING\_INFO\_FOR\_SM" service response without "user error" parameter (GSM 09.02 [7]).
- D. succReqForSMRoutingInfo.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

#### B.4.1.13 Attempted SM delivery status report procedures

- A. This measurement provides the number of requests to set Message waiting data into HLR or to inform HLR of successful SM transfer after polling (these are counted as attempts).
- B. CC.
- C. Receipt of "MAP\_REPORT\_SM\_DELIVERY\_STATUS" service indication (GSM 09.02 [7]).
- D. attSMDeliveryStatusReportProcs.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

## B.4.1.14 Successful SM delivery status report procedures

- A. This measurement provides the number of successful requests to set Message waiting data into HLR or to inform HLR of successful SM transfer after polling.
- B. CC.
- C. Transmission of "MAP\_REPORT\_SM\_DELIVERY\_STATUS" service response without "user error" parameter value (GSM 09.02 [7]).
- D. succSMDeliveryStatusReportProcs.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

## B.4.1.15 Attempted number of send alerts

- A. This measurement provides the number of transmissions of send alerts (these are counted as attempts).
- B. CC.
- C. Transmission of a "MAP\_ALERT\_SERVICE\_CENTRE" service request (GSM 09.02 [7]).
- D. attNbrOfSendAlerts.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

#### B.4.1.16 Successful number of send alerts

- A. This measurement provides the successful transmissions of send alerts.
- B. CC.
- C. Receipt of a "MAP\_ALERT\_SERVICE\_CENTRE" service confirmation without "user error" parameter value (GSM 09.02 [7]).
- D. succNbrOfSendAlerts.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit and packet switching.

## B.4.1.17 Attempted request for MSRN

- A. This measurement provides the number of requests for MSRN from the VLR (these are counted as attempts).
- B. CC.
- C. Transmission of "MAP\_PROVIDE\_ROAMING\_NUMBER" service request (GSM 09.02 [7]).
- D. attReqForMSRN.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit switching.

## B.4.1.18 Successful request for MSRN

- A. This measurement provides the successful responses for allocations of MSRN received from the VLR.
- B. CC.
- C. Receipt of "MAP\_PROVIDE\_ROAMING\_NUMBER" service confirmation without "user error" parameter value (GSM 09.02 [7]).
- D. succReqForMSRN.
- E. A single integer value.
- F. HLR Measurement Function.
- G. Valid for circuit switching.

# B.5 Measurements Related to the VLR

#### B.5.1 VLR Measurement Function

## B.5.1.1 Attempted MS memory available notifications

- A. This measurement provides the number of times a VLR informs the HLR that a MS is available for receiving short messages once again (these are counted as attempts).
- B. CC.
- C. Transmission of a "MAP\_READY\_FOR\_SM" service request (GSM 09.02 [7]).
- D. attMSMemoryAvailableNotifications.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

## B.5.1.2 Successful MS memory available notifications

- A. This measurement provides the number of times a VLR successfully informs the HLR that a MS is available for receiving short messages once again.
- B. CC.
- C. Receipt of "MAP\_READY\_FOR\_SM" service confirmation without "user error" parameter value (GSM 09.02 [7]).
- D. succMSMemoryAvailableNotifications.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

# B.5.1.3 Attempted Identification requests to PVLRs

- A. This measurement provides the number of identification information requests to the PVLR for subscribers registering afresh in this VLR (these are counted as attempts).
- B. CC.
- C. Transmission of "MAP\_SEND\_IDENTIFICATION" service request (GSM 09.02 [7]).
- D. attIdentificationReqToPVLRs.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

## B.5.1.4 Successful Identification requests to PVLRs

- A. This measurement provides the number of successful identification requests to the PVLR for subscriber registering afresh in this VLR.
- B. CC.
- C. Receipt of "MAP\_SEND\_IDENTIFICATION" service confirmation without "user error" parameter value (GSM 09.02 [7]).
- D. succIdentificationReqToPVLRs.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

#### B.5.1.5 Attempted page requests

- A. This measurement provides the number of page requests (these are counted as attempts).
- B. CC.
- C. Transmission of "MAP\_PAGE" service request (GSM 09.02 [7]).
- D. attPageReqs.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

## B.5.1.6 Successful page requests

- A. This measurement provides the number of successful page requests.
- B. CC.
- C. Receipt of "MAP\_PAGE" service confirmation without a "user error" parameter value (GSM 09.02 [7]).
- D. succPageReqs.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

# B.5.1.7 Attempted page requests per Location Area

- A. This measurement provides the number of page requests per Location Area (these are counted as attempts).
- B. CC.
- C. Transmission of "MAP PAGE" service request (GSM 09.02 [7]).
- D. attPageReqsPerLocationArea.
- E. An integer value per Location Area.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

## B.5.1.8 Successful page requests per Location Area

- A. This measurement provides the number of successful page requests per Location Area.
- B. CC.
- C. Receipt of "MAP\_PAGE" service confirmation without a "user error" parameter value (GSM 09.02 [7]).
- D. succPageReqsPerLocationArea.
- E. An integer value per Location Area.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

## B.5.1.9 Attempted requests for Authentication sets sent to HLR by VLRs

- A. This measurement provides the number of requests to the HLR by the VLR for Authentication sets (these are counted as attempts).
- B. CC.
- C. Transmission of a "MAP\_SEND\_AUTHENTICATION\_INFO" service request, requesting Authentication sets (parameter "AuthenticationSetKind" present GSM 09.02 [7]).
- $D.\ attReqFor AuthSetsSentToHLR.$
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

#### B.5.1.10 Successful received Authentication sets from HLR to VLRs

- A. This measurement provides the number of successful requests for Authentication sets from the HLR to the VLR.
- B. CC.
- C. Receipt of a "MAP\_SEND\_AUTHENTICATION\_INFO" service confirmation, containing requested Authentication sets parameter "AuthenticationSetList" present (GSM 09.02 [7]).
- D. succReceivedAuthSetsFromHLR.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

# B.5.1.11 Empty responses to request for Authentication sets from HLR to VLRs

- A. This measurement provides the number of empty responses received by the VLR in response to requests for Authentication sets (the implication is that the VLR will have to reuse old Authentication sets).
- B. CC.
- C. Receipt of a "MAP\_SEND\_AUTHENTICATION\_INFO" service confirmation, no Authentication sets present (GSM 09.02 [7]).
- D. emptyResponsesForAuthFromHLR.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

## B.5.1.12 Attempted authentication procedures in VLR

- A. This measurement provides the number of authentication requests which are sent to the MSC (these are counted as attempts).
- B. CC.
- C. Transmission of a "MAP\_AUTHENTICATE" service request (GSM 09.02 [7]).
- D. attAuthProcsInVLR.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

# B.5.1.13 Successful authentication procedures in the VLR

- A. This measurement provides the number of successful authentication procedures in the VLR.
- B. CC.
- C. Receipt of a "MAP\_AUTHENTICATE" service confirmation, where the received SRES parameter value matches value stored in the Location register (GSM 09.02 [7]).
- D. succAuthProcsInVLR.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

## B.5.1.14 Attempted intra-VLR Location Updates

- A. This measurement provides the number of Location Updates, between Location areas of the same VLR (these are counted as attempts).
- B. CC.
- C. Receipt of "MAP\_UPDATE\_LOCATION\_AREA" service indication, with previous Location Area identification parameter referring to the Location Area identity of the same VLR (GSM 09.02 [7]).
- D. attIntraVLRLocationUpdates.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

## B.5.1.15 Successful intra-VLR Location Updates

- A. This measurement provides the successful Location Updates between Location Areas of the same VLR.
- B. CC.
- C. Transmission of "MAP\_UPDATE\_LOCATION\_AREA" service response without "user error" parameter value, for attempted intra-VLR Location Update (GSM 09.02 [7]).
- D. succIntraVLRLocationUpdates.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

# B.5.1.16 Attempted inter-VLR Location Updates

- A. This measurement provides the number of Location Updates between Location Areas of different VLR (these are counted as attempts).
- B. CC.
- C. Receipt of "MAP\_UPDATE\_LOCATION\_AREA" service indication, with previous Location Area identification parameter referring to the Location Area identity of the different VLR, or no previous VLR identity (GSM 09.02 [7]).
- D. attInterVLRLocationUpdates.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

## B.5.1.17 Successful inter-VLR Location Updates

- A. This measurement provides the number of successful Location Updates between Location Areas of different VLRs.
- B. CC.
- C. Transmission of "MAP\_UPDATE\_LOCATION\_AREA" service response without "user error" parameter value, for attempted inter-VLR Location Update (GSM 09.02 [7]).
- D. succInterVLRLocationUpdates.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

## B.5.1.18 Arrivals of Visitors from other PLMNs

- A. This measurement provides the number of arrivals of visitors from other PLMNs i.e. exclude own MS's returning to HPLMN. This measurement has to be taken in each VLR of the HPLMN to get the total.
- B. CC.
- C. Receipt of "MAP\_UPDATE\_LOCATION\_AREA" service indication, the previous Location of the subscriber was another PLMN (GSM 09.02 [7]).
- D. arrivalOfVisitorsFromOtherPLMNs.
- E. A single integer value.
- F. VLR Measurement Function.
- G. Valid for circuit switching.

# B.6 Measurements Related to the EIR

### B.6.1 EIR Measurement Function

## B.6.1.1 Number of received IMEI check requests

- A. This measurement provides the number of IMEI check requests received by the EIR.
- B. CC.
- C. Receipt of "MAP\_CHECK\_IMEI" service indication (GSM 09.02 [7]).
- D. nbrOfReceivedIMEICheckReqs.
- E. A single integer value.
- F. EIR Measurement Function.
- G. Valid for circuit and packet switching.

#### B.6.1.2 Number of white answers in EIR

- A. This measurement provides the number of white answers transmitted by the EIR.
- B. CC.
- C. Transmission of "MAP\_CHECK\_IMEI" service response containing an "equipment status" referring to a white listed equipment (GSM 09.02 [7] and GSM 02.16 [1]).
- D. nbrOfWhiteAnsInEIR.
- E. A single integer value.
- F. EIR Measurement Function.
- G. Valid for circuit and packet switching.

# B.6.1.3 Number of grey answers in EIR

- A. This measurement provides the number of grey answers transmitted by the EIR.
- B. CC.
- C. Transmission of "MAP\_CHECK\_IMEI" service response containing an "equipment status" referring to a grey listed equipment (GSM 09.02 [7] and GSM 02.16 [1]).
- D. nbrOfGreyAnsInEIR.
- E. A single integer value.
- F. EIR Measurement Function.
- G. Valid for circuit and packet switching.

#### B.6.1.4 Number of black answers in EIR

- A. This measurement provides the number of black answers transmitted by the EIR.
- B. CC.
- C. Transmission of "MAP\_CHECK\_IMEI" service response containing an "equipment status" referring to a black listed equipment (GSM 09.02 [7] and GSM 02.16 [1]).
- D. nbrOfBlackAnsInEIR.
- E. A single integer value.
- F. EIR Measurement Function.
- G. Valid for circuit and packet switching.

#### B.6.1.5 Number of unknown IMEI answers

- A. This measurement provides the number of unknown IMEI answers transmitted by the EIR.
- B. CC.
- C. Transmission of "MAP\_CHECK\_IMEI" service response containing a parameter "user error" referring to a unknown equipment (GSM 09.02 [7]).
- D. nbrOfUnknownIMEIAnsInEIR.
- E. A single integer value.
- F. EIR Measurement Function.
- G. Valid for circuit and packet switching.

# B.7 Measurements Related to the SMS IWMSC/GMSC

#### B.7.1 SMS Measurement Function

## B.7.1.1 Attempted mobile originating SM Forwarding

- A. This measurement provides the number of attempted short Message forwarding handled by the interworking MSC.
- B. CC.
- C. Receipt of "MAP\_FORWARD\_SHORT\_MESSAGE" service indication (GSM 09.02 [7]).
- D. attMobileOriginatingSMForwardings.
- E. A single integer value.
- F. SMS Measurement Function.
- G. Valid for circuit and packet switching.

## B.7.1.2 Successful mobile originating SM Forwarding

- A. This measurement provides the number of successful short Message forwarding handled by the interworking MSC.
- B. CC.
- C. Transmission of "MAP\_FORWARD\_SHORT\_MESSAGE" service response without a "user error" parameter value (GSM 09.02 [7]).
- D. succMobileOriginatingSMForwardings.
- E. A single integer value.
- F. SMS Measurement Function
- G. Valid for circuit and packet switching.

# B.7.1.3 Attempted Mobile Terminating SM Forwarding

- A. This measurement provides the number of short messages forwarding from SMS-GMSC to the service node, MSC or SGSN (these are counted as attempts).
- B. CC.
- C. Transmission of a "MAP\_FORWARD\_SHORT\_MESSAGE" service request (GSM 09.02 [7]).
- D. attMobileTerminatingSMForwardings.
- E. A single integer value.
- F. SMS Measurement Function.
- G. Valid for circuit and packet switching.

# B.7.1.4 Successful Mobile Terminating SM Forwarding

- A. This measurement provides the number of successful of short Message forwarding from SMS-GMSC to the service node, MSC or SGSN.
- B. CC.
- C. Receipt of a "MAP\_FORWARD\_SHORT\_MESSAGE" service response without a "user error" parameter value (GSM 09.02 [7]).
- D. succMobileTerminatingSMForwardings.
- E. A single integer value.
- F. SMS Measurement Function.
- G. Valid for circuit and packet switching.

# B.8 Measurements Related to the SGSN

### B.8.1 SGSN Measurement Function

#### B.8.1.1 LLC Measurements

#### B.8.1.1.1 Number of LLC frames sent

- A. This measurement provides the number of LLC frames sent by the SGSN.
- B. CC.
- C. Transmission of LLC frame to a peer entity GSM TS 04.64 [24].
- D. nbrLlcFramesSent.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.1.2 Number of LLC frames Received

- A. This measurement provides the number of received LLC frames by the SGSN.
- B. CC.
- C. Receipt of a LLC frames from a peer entity and before any error checking(GSM TS 04.64).
- D. nbrLlcFramesReceived.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.1.3 Erroneously received LLC frames detected by SGSN

- A. This measurement provides the number of erroneously received LLC frames in case of error detection in the SGSN (uplink transmission, SGSN).
- B. CC.
- C. Discard of a received frame in the SGSN, GSM TS 04.64 [24].
- D. errLlcFramesDetectedBySgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

## B.8.1.1.4 Number of Retransmitted LLC frames in Acknowledge Mode

- A. This measurement provides the number of retransmitted LLC frames in LLC acknowledge mode, detected in the MS and signalled to the SGSN (downlink transmission, MS).
- B. CC.
- C. Receipt of a NACK or SACK frame from the peer entity (MS), GSM TS 04.64 [24].
- D. retransmittedLlcFramestoMs.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.2 SNDCP Measurements

#### B.8.1.2.1 Number of received SNDCP N-PDUs

- A. This measurement provides the number of incoming N-PDUs received by the SNDCP protocol.
- B. CC.
- C. Receipt of the "SN-DATA.ind" or "SN-UNITDATA.ind" primitive, GSM TS 04.65 [25].
- D. uplinkSndcpNpduReceived.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.2.2 Number of received SNDCP N-PDU octets

- A. This measurement provides the number of octets in incoming N-PDUs received by the SNDCP protocol layer.
- B. CC.
- C. Receipt of the "SN-DATA.ind" or "SN-UNITDATA.ind" primitive, GSM TS 04.65 [25].
- D. uplinkSndcpOctetReceivedMode.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.2.3 Number of sent SNDCP N-PDUs

- A. This measurement provides the number of outgoing N-PDUs sent by the SNDCP protocol layer.
- B. CC.
- C. Sent of the "SN-DATA.req" and "SN-UNITDATA.req" primitive(GSM TS 04.65).
- D. downlinkSndcpNpduSent.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.2.4 Number of sent SNDCP N-PDU octets

- A. This measurement provides the number of octets in outgoing N-PDUs sent by the SNDCP protocol layer.
- B. CC.
- C. Sent of the "SN-DATA.req" and "SN-UNITDATA.req" primitive(GSM TS 04.65).
- D. downlinkSndcpOctetSent.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.3 BSSGP Measurements.

FFS, to be defined.

#### B.8.1.4 MM Measurements

#### B.8.1.4.1 Attempted GPRS attach procedures

- A. This measurement provides the number of attempted GPRS attach procedures initiated within this SGSN area.
- B. CC.
- C. Receipt of "ATTACH REQUEST" message from the MS, indicating a GPRS attach(GSM 04.08 [2]).
- D. attGprsAttach.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.2 Successful GPRS attach procedures

- A. This measurement provides the number of successfully performed GPRS attach procedures within this SGSN area.
- B. CC.
- C. Transmission of a "ATTACH ACCEPT" message to the MS, indicating a GPRS only attached (GSM 04.08 [2]).
- D. succGprsAttach.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.3 Attempt of combined GPRS/IMSI attach procedures

- A. This measurement provides the number of attempt of combined GPRS/IMSI attach procedures initiated within this SGSN area.
- B. CC.
- C. Receipt of "ATTACH REQUEST" message from the MS, indicating combined GPRS/IMSI attach (GSM 04.08 [2]).
- D. attCombiAttach.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.4 Successfully combined GPRS/IMSI attach procedures

- A. This measurement provides the number of successfully completed of Combined GPRS/IMSI attach procedures initiated within this SGSN area.
- B. CC.
- C. Transmission of "ATTACH ACCEPT" message to the MS, indicating combined GPRS/IMSI attach (GSM 04.08 [2]).
- D. succCombiAttach.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.5 Attempted GPRS attach procedures with IMSI already attached

- A. This measurement provides the number of attempted GPRS attach procedures, while IMSI is already attached. The attempts initiated within this SGSN area are counted.
- B. CC.
- C. Receipt of "ATTACH REQUEST" Message from the MS, indicating GPRS attach while IMSI attached (GSM 04.08 [2]).
- D. attImsiAttach.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.6 Successful GPRS attach procedures with IMSI already attached

- A. This measurement provides the number of successfully performed GPRS attach procedures, while IMSI is already attached. The attempts initiated within this SGSN area are counted.
- B. CC.
- C Transmission of a "ATTACH ACCEPT" message to the MS, indicating a GPRS attach while IMSI attached (GSM 04.08 [2]).
- D succImsiAttach.
- E A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.7 Number of attached subscriber

- A. This measurement provides the number of attached subscriber within this SGSN area.
- B. GAUGE.
- C. The gauge will be incremented at transmission of a "ATTACH ACCEPT" message to the MS and will be decremented at transmission of a "DETACH ACCEPT" message to the MS (GSM 04.08 [2]).
- D. nbrOfAttachedSub.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.8 Mean number of attached subscriber

- A. This measurement provides the arithmetic mean of the number of attached subscriber within this SGSN area.
- B. GAUGE.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the number of subscribers which are attached and then taking the arithmetic mean (GSM 04.08 [2]).
- D. meanNbrOfAttachedSub.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.9 Maximum number of attached subscriber

- A. This measurement provides the highest recorded value for the number of attached subscriber within this SGSN area.
- B. GAUGE.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the number of subscriber which are "attached", and then taking the maximum of all such values at the end of the granularity period (GSM 04.08 [2]).
- D. maxNbrOfAttachedSub.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.10 Attempted GPRS detach procedures initiated by MS

- A. This measurement provides the number of attempted GPRS detach procedures within this SGSN area.
- B. CC.
- C. Receipt of "DETACH REQUEST" message from the MS, indicating a GPRS detach(GSM 04.08 [2]).
- D. attGprsDetachMs.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.11 Attempt of Combined GPRS/IMSI detach procedures initiated by MS

- A. This measurement provides the number of attempted Combined GPRS/IMSI detach procedures MS-initiated within this SGSN area.
- B. CC.
- C. Receipt of "DETACH REQUEST" message from the MS, indicating a Combined GPRS/IMSI detach (GSM 04.08 [2]).
- D. attCombiDetachMs.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.12 Attempt of IMSI detach procedures initiated by MS

- A. This measurement provides the number of attempted IMSI detach procedures MS-initiated within this SGSN area.
- B. CC.
- C Receipt of "DETACH REQUEST" message from the MS, indicating a IMSI detach (GSM 04.08 [2]).
- D. attImsiDetachMS.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.13 Attempted GPRS detach procedures initiated by SGSN

- A. This measurement provides the number of attempted GPRS detach procedures initiated by SGSN.
- B. CC.
- C. Transmission of a "DETACH REQUEST" message to the MS (GSM 04.08 [2]).
- D. attGprsDetachSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.4.14 Successful GPRS detach procedures initiated by SGSN

- A. This measurement provides the number of successfully completed GPRS detach procedures SGSN-initiated within this SGSN area.
- B. CC.
- C. Receipt of "DETACH ACCEPT" message from the MS (GSM 04.08 [2]).
- D. succGprsDetachSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

# B.8.1.4.15 Attempted intra-SGSN Routing Area Update procedures initiated in this SGSN

- A. This measurement provides the number of attempted intra-SGSN Routing Area Update procedures initiated within this SGSN area.
- B. CC.
- C. Receipt of a "ROUTING AREA UPDATE REQUEST" message from the MS, where the old RA and the new RA are served by this SGSN (GSM 04.08 [2]).
- D. attIntraSgsnRaUpdate.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

# B.8.1.4.16 Successful intra-SGSN Routing Area Update procedures initiated in this SGSN

- A. This measurement provides the number of successfully performed intra-SGSN Routing Area Update procedures initiated in this SGSN.
- B. CC.
- C. Transmission of "ROUTING AREA UPDATE ACCEPT" message to the MS, GSM 04.08 [2].
- D. succIntraSgsnRaUpdate.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

# B.8.1.4.17 Attempted inter-SGSN Routing Area Update procedures initiated in this SGSN

- A. This measurement provides the number of attempted inter-SGSN Routing Area Update procedures initiated in this SGSN, where the old RA is served by another SGSN, GSM 04.08 [2].
- B. CC.
- C. Receipt of an "ROUTING AREA UPDATE REQUEST" message from the MS,GSM 04.08 [2].
- D. attInterSgsnRaUpdate.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

# B.8.1.4.18 Successful inter-SGSN Routing Area Update procedures initiated in this SGSN

- A. This measurement provides the number of successfully completed inter-SGSN Routing Area Update procedures in this SGSN.
- B CC.
- C. Receipt of a "ROUTING AREA UPDATE COMPLETE" message from the MS, GSM 04.08 [2].
- D. succInterSgsnRaUpdate.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

## B.8.1.5 Security

#### B.8.1.5.1 Attempted P-TMSI reallocation procedures

- A. This measurement provides the number of attempted P-TMSI reallocation, or implicitly as part of the Location Updating, procedures in this SGSN.
- B. CC.
- C. Transmission of "P-TMSI REALLOCATION COMMAND" message by the SGSN, GSM 04.08 [2].
- D. attPTMSIRealloc.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.5.2 Successful P-TMSI reallocation procedures

- A. This measurement provides the number of successfully performed P-TMSI reallocation procedures in this SGSN.
- B. CC.
- C. Receipt of "P-TMSI REALLOCATION COMPLETE" message by the SGSN, GSM 04.08 [2].
- D. succPTMSIRealloc.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.5.3 Attempted requests for authentication sets sent to HLR by SGSN

- A. This measurement provides the number of number of attempted requests for authentication sets, sent to the HLR by SGSN, these are counted as attempts.
- B. CC.
- C. Transmission of a "MAP SEND\_AUTHENTICATION\_INFO" service request, requesting authentication sets parameter "AuthenticationSetKind" present, GSM 09.02 [7].
- D. attReqAuthSetsSentToHlrBySgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.5.4 Successful requests for authentication sets to HLR

- A. This measurement provides the number of successful requests for authentication sets that were sent from the HLR to the SGSN.
- B. CC.
- C. Receipt of a "MAP SEND\_AUTHENTICATION\_INFO" service confirmation, containing requested authentication sets (parameter "AuthenticationSetList" present GSM 09.02 [7].
- D. succReqAuthSetsHlr.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

## B.8.1.5.5 Empty responses to the request for authentication sets to the HLR

- A. This measurement provides the number of empty responses to the request for authentication sets that were sent to the HLR.
- B. CC.
- C. Receipt of a "MAP\_SEND\_AUTHENTICATION\_INFO" service confirmation, no Authentication sets present, GSM 09.02 [7].
- D. emptyResponsesForAuthSetsFromHlr.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.5.6 Attempt of authentication procedures started by SGSN

- A. This measurement provides the number of authentication procedures that are started within this SGSN area.
- B. CC.
- C. Transmission of an "AUTHENTICATION AND CIPHERING REQUEST" message to the MS (GSM 04.08).
- D. attAuthInSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.5.7 Successful authentication procedures started by the SGSN

- A. This measurement provides the number of successful authentication procedures within this SGSN area.
- B. CC.
- C. Receipt of an "AUTHENTICATION AND CIPHERING RESPONSE" message from the MS, where the receipt SRES parameter value matches the value stored in the SGSN (GSM 04.08).
- D. succAuthInSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.5.8 Attempted Identity Request procedures

- A. This measurement provides the number of attempted Identity Request procedures initiated by this SGSN.
- B. CC.
- C. Transmission of an "IDENTITY REQUEST" message to the MS (GSM 04.08).
- D. attIdentityReq.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.5.9 Successful Identity Request procedures

- A. This measurement provides the number of successfully completed Identity Request procedures initiated by this SGSN.
- B. CC.
- C. Receipt of an "IDENTITY RESPONSE" message with IMSI by the SGSN from the MS (GSM 04.08).
- D. succIdentityReq.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.6 State

#### B.8.1.6.1 Number of subscribers in the SGSN in STANDBY state.

- A. This measurement provides the number of subscribers in 'STANDBY' state within this SGSN area.
- B. GAUGE.
- C. Transition of a GPRS subscriber registered in the SGSN into/from the operational state 'STANDBY'.
- D. nbrOfSubStandby.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.6.2 Mean number of subscribers in the SGSN in STANDBY state

- A. This measurement provides the arithmetic mean of the number of subscriber in 'STANDBY' state within this SGSN area.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System designed), the number of subscribers in the STANDBY state, and then taking the arithmetic mean.
- D. meanNbrOfSubStandby.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.6.3 Maximum number of subscribers in the SGSN in STANDBY state.

- A. This measurement provides the highest recorded value for number of subscribers in 'STANDBY' state within this SGSN area.
- B. GAUGE.
- C. This measurement is obtained by comparing on an update of the actual number of subscribers in the STANDBY state, this value with the currently maximal value within the actual granularity period.
- D. maxNbrOfSubStandby.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.6.4 Number of subscribers in the SGSN in READY state

- A. This measurement provides the number of subscribers in 'READY' state within this SGSN area.
- B. GAUGE.
- C. Transition of a GPRS subscriber registered in the SGSN into/from the operational state 'READY'.
- D. nbrOfSubReady.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.6.5 Mean number of subscribers in the SGSN in READY state

- A. This measurement provides the arithmetic mean of the number of subscriber in 'READY' state within this SGSN area.
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System design), the number of subscribers in the READY state, and then taking the arithmetic mean.
- D. meanNbrOfSubReady.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.6.6 Maximum number of subscribers in the SGSN in READY state

- A. This measurement provides the highest recorded value for number of subscribers in 'READY' state within this SGSN area.
- B. GAUGE.
- C. This measurement is obtained by comparing on an update of the actual number of subscribers in the READY state, this value with the currently maximal value within the actual granularity period.
- D. maxNbrOfSubReady.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

## B.8.1.7 Equipment

#### B.8.1.7.1 Number of transmitted check IMEI requests

- A. This measurement provides the number of check IMEI requests sent to the EIR.
- B. CC.
- C. Transmission of "MAP\_IMEI\_CHECK" service request (GSM 09.02 [7]).
- D. nbrOfCheckIMEIRequest.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.7.2 Number of white answers in SGSN

- A. This measurement provides the number of white list answers received from the EIR.
- B. CC.
- C. Receipt of "MAP\_IMEI\_CHECK" service confirmation with parameter "equipment status" referring to the white listed equipment.(GSM 09.02 and GSM 02.16).
- D. nbrOfWhiteAnswerInSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.7.3 Number of grey answers in SGSN

- A. This measurement provides the number of grey list answers received from the EIR.
- B. CC.
- C. Receipt of "MAP\_IMEI\_CHECK" service confirmation with parameter "equipment status" referring to the grey listed equipment.(GSM 09.02 and GSM 02.16).
- D. nbrOfGreyAnswerInSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.7.4 Number of black answers in SGSN

- A. This measurement provides the number of black list answers received from the EIR.
- B. CC.
- C. Receipt of "MAP\_IMEI\_CHECK" service confirmation with parameter "equipment status" referring to the black listed equipment.(GSM 09.02 and GSM 02.16).
- D. nbrOfBlackAnswerInSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.7.5 Number of unknown IMEI answers

- A. This measurement provides the number of unknown IMEI answers received from the EIR.
- B. CC.
- C. Receipt of "MAP\_IMEI\_CHECK" service confirmation with parameter "equipment status" referring to unknown equipment.(GSM 09.02).
- D. nbrOfUnknownAnswerInSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.8 RRM Measurements

#### B.8.1.8.1 Attempt of packet switched paging procedures

- A. This measurement provides the number of attempted packet switched paging procedures, for GPRS services, within this SGSN area. The initial paging procedures as well the repeated paging procedures are counted.
- B. CC.
- C. Transmission of "GMM-PAGING.req" message (GSM 08.18).
- D. attPacketSwitchingPaging.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.8.2 Unsuccessful packet switched paging procedures

A. This measurement provides the number of unsuccessful packet switched paging (GPRS) procedures within this SGSN area, i.e. packed switching paging procedures that are re-started when the previous attempt has timed out.

113

- B. CC.
- C. Receipt of timeout for the "GMM-PAGING.req" message (GSM TS 08.18).
- D. unsuccPacketSwitchingPaging.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.8.3 Attempt of packet switched paging procedures per Routing Area

- A. This measurement provides the number of attempted packet switched paging procedures, for GPRS services, within this Routing Area. The initial paging procedures as well the repeated paging procedures are counted.
- B. CC.
- C. Transmission of "GMM-PAGING.req" message (GSM 08.18).
- D. attPsPagingPerRoutingArea.
- E. A single integer value per Routing Area.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### Unsuccessful packet switched paging procedures per Routing Area B.8.1.8.4

- A. This measurement provides the number of unsuccessful packet switched paging (GPRS) procedures within this Routing Area, i.e. packed switching paging procedures that are re-started when the previous attempt has timed out.
- B. CC.
- C. Receipt of timeout for the "GMM-PAGING.req" message (GSM 08.18).
- D. unsuccPsPagingPerRoutingArea.
- E. A single integer value per Routing Area.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.9 SM Measurements

#### B.8.1.9.1 Attempted PDP context activation procedures initiated by MS

- A. This measurement provides the number of attempted PDP context activation procedures. These include the static as well as the dynamic PDP addresses.
- B. CC.
- C. Receipt of a "Activate PDP Context Request" message from the MS (GSM 04.08).
- D. attActPdpContextMSPerSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.9.2 Successful PDP context activation procedures initiated by MS

- A. This measurement provides the number of successfully completed PDP context activations. For these context activations, the GGSN is updated successfully.
- B. CC.
- C. Transmission of a "Activate PDP Context Accept" message to the MS (GSM 04.08).
- D. succActPdpContextMSPerSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.9.3 Attempted dynamic PDP context activation procedures initiated by MS

- A. This measurement provides the number of attempted PDP context activation requests where a dynamic PDP address is required to be used.
- B. CC.
- C. Receipt of a "Activate PDP Context Request" message from the MS with an empty PDP address (GSM 04.08).
- D. attActPdpContextDynMSPerSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.9.4 Successful dynamic PDP context activation procedures initiated by MS

- A. This measurement provides the number of successfully completed PDP context activations where a dynamic PDP address is used.
- B. CC.
- C. Transmission of a "Activate PDP Context Accept" message to the MS (GSM TS 04.08) when the PDP address has been dynamically assigned.
- D. succActPdpDynContextDynMsPerSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.9.5 Attempted PDP context deactivation procedures initiated by the MS

- A. This measurement provides the number of PDP context deactivation procedures.
- B. CC.
- C. Receipt of a "Deactivate PDP Context Request" message from the MS (GSM 04.08).
- D. attDeactPdpContextMsPerSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.9.6 Successful PDP context deactivation procedures initiated by the MS

- A. This measurement provides the number of successfully completed PDP context deactivations. For these context deactivations, the GGSN is updated successfully (i.e. deletion of the PDP context).
- B. CC.
- C. Transmission of a "Deactivate PDP Context Accept" message to the MS (GSM 04.08).
- $D.\ succ DeactPdp Context Ms Per Sgsn.$
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.9.7 Attempted PDP context deactivation procedures initiated by the GGSN

- A. This measurement provides the number of PDP context deactivation procedures initiated by the GGSN.
- B. CC.
- C. Receipt of a "Delete PDP Context Request" message from the GGSN (GSM 09.60).
- D. attDeactPdpContextGgsnPerSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.9.8 Successful PDP context deactivation procedures initiated by the GGSN

- A. This measurement provides the number of successfully handled PDP context deactivations initiated by the GGSN. For these context deactivations, the MS has accepted the PDP context deactivation.
- B. CC.
- C. Transmission of a "Delete PDP Context Response" message to the GGSN (GSM 09.60).
- D. succDeactPdpContextGgsnPerSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G Valid for packet switching.

#### B.8.1.9.9 Number of subscribers with activated PDP context in SGSN

- A. This measurement provides the number of mobile subscribers with activated PDP context (i.e. subscribers that can send/receive GPRS packet data).
- B. GAUGE.
- C. Addition of first PDP context or removal of last PDP context in SGSN location register for a particular subscriber.
- D. nbrSubsWithActivePdpInSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.9.10 Mean number of subscribers with activated PDP context in SGSN

- A. This measurement provides the arithmetic mean number value of subscribers that have activated PDP context (i.e. subscribers that can send/receive GPRS packet data).
- B. SI.
- C. This measurement is obtained by sampling at a pre-defined interval (System design), the number of subscribers with activated PDP context in SGSN, and then taking the arithmetic mean.
- D. meanSubsWithActivePdpInSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

#### B.8.1.9.11 Maximum number of subscribers with activated PDP context in SGSN

- A. This measurement provides the highest recorded value for number of subscribers with activated PDP contexts (i.e. subscribers that can send/receive GPRS packet data).
- B. GAUGE.
- C. This measurement is obtained by comparing on an update of the actual number of subscribers with activated PDP context in SGSN, this value with the currently maximal value within the actual granularity period.
- D. maxSubsWithActivePdpInSgsn.
- E. A single integer value.
- F. SGSN Measurement Function.
- G. Valid for packet switching.

# B.9 Measurements Related to the GGSN

#### B.9.1 GGSN Measurement Function

# B.9.1.1 Number of PDP context activation procedures initiated by the MS Per APN

- A. This measurement provides the number of PDP context activation procedures initiated by the MS on a per APN of the GGSN.
- B. CC.
- C. Receipt of a "Create PDP Context Request" message from the SGSN (GSM 09.60).
- D. attActPdpContextPerApnOfGgsn.
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

# B.9.1.2 Successful PDP context activation procedures initiated by the MS Per APN

- A. This measurement provides the number of successfully completed activation PDP context procedures initiated by the MS on a per APN of the GGSN.
- B. CC.
- C. Transmission of "Create PDP Context Response" from GGSN (GSM 09.60).
- D. succActPdpContextPerApnOfGgsn.
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

# B.9.1.3 Number of dynamic PDP context activation procedures initiated by the MS Per APN

- A. This measurement provides the number of dynamic PDP context activation procedures initiated by the MS where a dynamic PDP address is requested on a per APN of the GGSN.
- B. CC.
- C. Receipt of a "Create PDP Context Request" message MS with an empty PDP address (GSM 09.60).
- D. attActPdpContextDynPerApnOfGgsn.
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

# B.9.1.4 Successful +dynamic PDP context activation procedures initiated by the MS Per APN

- A. This measurement provides the number of successfully attempted dynamic PDP context activation procedures initiated by the MS where a dynamic PDP address is requested on a per APN of the GGSN.
- B. CC.
- C. Transmission of "Create PDP Context Response" from GGSN (GSM 09.60), the PDP address has been dynamically assigned.
- D. succActPdpContextDynPerApnOfGgsn.
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

# B.9.1.5 Number of PDP context deactivation procedures initiated by the MS Per APN

- A. This measurement provides the number of PDP context deactivation procedures initiated by the MS on a per APN of the GGSN.
- B. CC.
- C. Receipt of a "Delete PDP Context Request" message from the SGSN (GSM 09.60).
- D. attDeactPdpContextPerApnOfGgsn.
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

# B.9.1.6 Successful PDP context deactivation procedures initiated by the MS Per APN

- A. This measurement provides the number of successfully completed PDP context deactivation procedures initiated by the MS on a per APN of the GGSN.
- B. CC.
- C. Transmission of a "Delete PDP Context Response" message to the SGSN (GSM TS 09.60).
- $D.\ succ DeactPdp ContextPer Apn Of Ggsn.$
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

# B.9.1.7 Number of PDP context deactivation procedures initiated by the GGSN Per APN

- A. This measurement provides the number of PDP context deactivation procedures initiated by the GGSN, on a per APN of the GGSN.
- B. CC.
- C. Transmission of a "Deactivate PDP Context Request" message to the SGSN (GSM 09.60).
- D. attDeactPdpContextByGgsnPerApn.
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

# B.9.1.8 Successful PDP context deactivation procedures initiated by the GGSN Per APN

- A. This measurement provides the number of successfully completed PDP context deactivation procedures initiated by the GGSN, on a per APN of the GGSN.
- B. CC.
- C. Receipt of "Delete PDP Context Response" message from the SGSN (GSM 09.60).
- D. succDeactPdpContextByGgsnPerApn.
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

#### B.9.1.9 Number of active PDP context in GGSN Per APN

- A. This measurement provides the number of active PDP context in this GGSN.
- B. GAUGE.
- C. Addition or removal of a PDP context in GGSN.
- $D.\ nbrOfActive Pdp Contexts Per Apn At Ggsn.$
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

#### B.9.1.10 Mean number of active PDP context in GGSN Per APN

- A. This measurement is obtained by sampling at a pre-defined interval (System designed), the number of active PDP context in GGSN per APN, and then taking the arithmetic mean.
- B. SI.
- C. Addition or removal of a PDP context in GGSN.
- D. meanNbrOfActivePdpContextsPerApnAtGgsn.
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

#### B.9.1.11 Maximum number of PDP context in GGSN Per APN

- A. This measurement is obtained by comparing on an update of the actual number of active PDP context in GGSN per APN, this value with the currently maximal value within the actual granularity period.
- B. GAUGE.
- C. Addition a PDP context in GGSN.
- D. maxnbrOfActivePdpContextsPerApnAtGgsn.
- E. A single integer value.
- F. GGSN Measurement Function.
- G. Valid for packet switching.

# Annex C (normative): Performance Measurement Object Model

This annex to GSM 12.04 comprises the Object Model for Performance Measurement to complement the high level Object Model in GSM 12.00 [8].

The whole management approach defined in GSM 12.00 [8] defines all entities of GSM network as managed functions. These are BSS, MSC, HLR etc. and one or more of these can be contained in managed element and each of these functions can contain it's own measurement function.

The SGSN and GGSN detailed, are additional to GSM 12.00 [8] due to the introduction of GPRS.

#### **Model Structure and Content**

The following measurement function model takes its basis from the proposed GSM 12.00 [8] high level model. Figure C.1 shows the containment tree of all the measurement Object Classes. The formal GDMO definitions of the Managed Object Classes concerning measurement functions are described in this clause, except the "log", which is described in annex D under data transfer requirements.

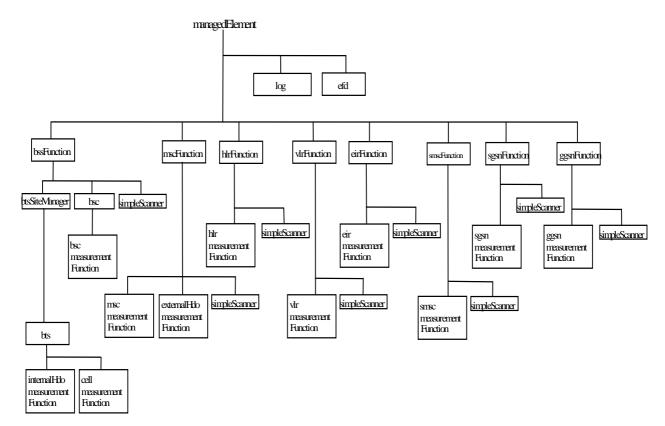


Figure C.1: GSM 12.04 Performance Measurement Object Class Containment

#### C.1Measurement Managed Object Classes

#### C.1.1 object class from ITU-T ISO

The object class used by the present document is the simple scanner, as defined in ISO 10164-13 [34]. Within the realm of the present document, each "simpleScanner" instance is only required to scan attributes of "measurementFunction" objects that are contained in the same "xxxFunction" object as the "simpleScanner" itself, where "xxx" stands for "bss", "msc", "hlr", "vlr", "eir", "sgsn", "ggsn" or "smsc", respectively (see containment tree diagram on previous page).

#### C.1.2bscMeasurementFunction

bscMeasurementFunction MANAGED OBJECT CLASS

**DERIVED FROM** 

"Recommendation X.721: 1992": top;

**CHARACTERIZED BY** 

basicMeasurementFunctionPackage:

**CONDITIONAL PACKAGES** 

requestForServicePackage PRESENT IF "an instance

supports it",

requestForServicePerCausePackage PRESENT IF "an instance

supports it",

interArrivalTimePackage PRESENT IF "an instance

supports it".

PRESENT IF "an instance pagingMessagePerBSCPackage

supports it",

immediateAssignmentProceduresPerBSCPackage PRESENT IF "an instance

supports it",

internalHandoversIntraCellPerBSCPackage PRESENT IF "an instance

supports it",

internalHandoversPerBSCPackage PRESENT IF "an instance

supports it",

internalHandoversPerCausePackage PRESENT IF "an instance

supports it",

internalHandoverFailuresPerBSCPackage PRESENT IF "an instance

supports it",

gprsPDUFlushReqPackage PRESENT IF "an instance

supports it",

gprsPagingReguestPackage PRESENT IF "an instance

supports it",

PRESENT IF "an instance gprsInterArrivalPackage

supports it":

**REGISTERED AS** {gsm1204managedobjectClass 121};

#### C.1.3 cellMeasurementFunction

cellMeasurementFunction MANAGED OBJECT CLASS

**DERIVED FROM** 

"Recommendation X.721: 1992": top;

**CHARACTERIZED BY** 

basicMeasurementFunctionPackage:

**CONDITIONAL PACKAGES** 

pchagchQueuePackage

supports it",

pagingMess

PRESENT IF "an instance

PRESENT IF "an instance agePackage supports it", immediateAssignmentProceduresPackage PRESENT IF "an instance supports it", immediateAssignmentProceduresPerCausePackage PRESENT IF "an instance supports it", pageDiscardPackage PRESENT IF "an instance supports it", durationOfPagingProceduresPackage PRESENT IF "an instance supports it", tchAvailablePackage PRESENT IF "an instance supports it", tchBusyPackage PRESENT IF "an instance supports it", idleTCHsPerInterferenceBandPackage PRESENT IF "an instance supports it", tchSeizuresPackage PRESENT IF "an instance supports it", tchAllocatedTimePackage PRESENT IF "an instance supports it", tchBusyTimePackage PRESENT IF "an instance supports it", tchQueuePackage PRESENT IF "an instance supports it", PRESENT IF "an instance IostRadioLinksPerTCHPackage supports it", sdcchAvailablePackage PRESENT IF "an instance supports it", sdcchBusyPackage PRESENT IF "an instance supports it", sdcchSeizuresPackage PRESENT IF "an instance supports it", sdcchAllocatedTimePackage PRESENT IF "an instance supports it", sdcchQueuePackage PRESENT IF "an instance supports it", IostRadioLinksPerSDCCHPackage PRESENT IF "an instance supports it", PRESENT IF "an instance downlinkPowerControlPackage supports it", uplinkPowerControlPackage PRESENT IF "an instance supports it", internalHandoversIntraCellPackage PRESENT IF "an instance supports it", incomingInternalInterCellHandoversPackage **PRESENT IF** "an instance supports it", outgoingInternalInterCellHandoversPackage PRESENT IF "an instance supports it", internalHandoverFailurePackage PRESENT IF "an instance supports it", gprsPDCHAvailablePackage PRESENT IF "an instance supports it", gprsPDCHOccupiedPackage PRESENT IF "an instance supports it", gprsPDCHAllocatedPackage PRESENT IF "an instance supports it", gprsPCCCHPagingPackage PRESENT IF "an instance supports it",

PRESENT IF "an instance

PRESENT IF "an instance

PRESENT IF "an instance

PRESENT IF "an instance

gprsPPCHQueueOnPCCCHPackage

supports it",

gprsPDTCHAssignmentPackage

supports it",

gprsPDTCHQueuePackage

supports it",

gprsCSChangePackage

supports it";

**REGISTERED AS** {gsm1204managedobjectClass 131};

#### C.1.4internalHdoMeasurementFunction

internalHdoMeasurementFunction MANAGED OBJECT CLASS

**DERIVED FROM** 

"Recommendation X.721: 1992": top;

**CHARACTERIZED BY** 

basicMeasurementFunctionPackage, internalHdoMeasurementFunctionPackage;

**CONDITIONAL PACKAGES** 

incomingInternalInterCellPerCellHandoversPackage PRESENT IF "an instance

supports it",

outgoingInternalInterCellPerCellHandoversPackage

PRESENT IF "an instance

supports it";

**REGISTERED AS** {gsm1204managedobjectClass 140};

 $internal Hdo Measurement Function Package \ \textbf{PACKAGE}$ 

**BEHAVIOUR** 

internalHdoMeasurementFunctionBehaviour;

**ATTRIBUTES** 

"gsm1220: 1993": adjacentCellId

GET:

**REGISTERED AS** {gsm1204package 140};

internalHdoMeasurementFunctionBehaviour BEHAVIOUR

#### **DEFINED AS**

"This object is defined to contain the various optional measurement packages and will exist in multiple instances. Creation is only allowed if the value of the adjacent cell attribute is identical to the value of the adjacent cell attribute in one of the <HDO adjacent Cell> objects. There can be one or more instance(s) of the HDO measurement function for each created instance of <HDO adjacent cell> MOC. If the adjacent Cell Object is re-named or deleted during the lifetime of the internalHdoMeasurementFunction of its associated internalHdoMeasurementFunction then the corresponding internalHdoMeasurementFunction(s) is/are automatically deleted, as the adjacent Cell Attribute of the mesurementFunction shall not be changeable. The scanner may scan attributes of the object class in various combinations and permutations of packages, and further may scan simultaneously as many times as necessary within the processing limits of the network."

#### C.1.5mscMeasurementFunction

mscMeasurementFunction MANAGED OBJECT CLASS

**DERIVED FROM** 

"Recommendation X.721: 1992": top;

**CHARACTERIZED BY** 

basicMeasurementFunctionPackage;

**CONDITIONAL PACKAGES** 

classMarkPackage supports it",

PRESENT IF "an instance

mobileOriginatingCallsPackage supports it",	PRESENT IF "an instance
mobileTerminatingCallsPackage supports it",	PRESENT IF "an instance
mobileEmergencyCallsPackage supports it",	PRESENT IF "an instance
cipheringModePackage supports it",	PRESENT IF "an instance
interrogatingHLRPackage supports it",	PRESENT IF "an instance
mobileOriginatingPointToPointSMPackage supports it",	PRESENT IF "an instance
mobileTerminatingPointToPointSMPackage supports it",	PRESENT IF "an instance
imeiRequestPackage supports it",	PRESENT IF "an instance
whiteAnswersInMSCPackage supports it",	PRESENT IF "an instance
greyAnswersInMSCPackage supports it",	PRESENT IF "an instance
blackAnswersInMSCPackage supports it",	PRESENT IF "an instance
unknownIMEIAnswersInMSCPackage supports it",	PRESENT IF "an instance
callSetupServicePackage supports it",	PRESENT IF "an instance
locationUpdatingServicePackage supports it",	PRESENT IF "an instance
subscriberIdentifiedWithTMSIPackage supports it",	PRESENT IF "an instance
subscriberIdentifiedWithIMSIPackage supports it",	PRESENT IF "an instance
tmsiReallocationsPackage supports it",	PRESENT IF "an instance
imsiDetachAttachProceduresPackage supports it",	PRESENT IF "an instance
incomingExternalIntraMSCHandoversPackage supports it",	PRESENT IF "an instance
outgoingExternalIntraMSCHandoversPackage supports it",	PRESENT IF "an instance
incomingInterMSCHandoversPackage supports it",	PRESENT IF "an instance
outgoingInterMSCHandoversPackage supports it",	PRESENT IF "an instance
subsequentInterMSCHandoversToMACaPackage supports it",	PRESENT IF "an instance
subsequentInterMSCHandoversToMACcPackage supports it",	PRESENT IF "an instance
externalHandoversPackage supports it",	PRESENT IF "an instance
externalHandoversPerCausePackage supports it",	PRESENT IF "an instance
externalHandoverFailurePerMSCPackage supports it";	PRESENT IF "an instance
REGISTERED AS {gsm1204managedobjectClass 150};	

#### C.1.6 externalHdoMeasurementFunction

#### externalHdoMeasurementFunction MANAGED OBJECT CLASS

#### **DERIVED FROM**

"Recommendation X.721: 1992": top;

#### **CHARACTERIZED BY**

basicMeasurementFunctionPackage, externalHdoMeasurementFunctionPackage;

#### CONDITIONAL PACKAGES

incomingExternalIntraMSCHandoversPerCellPackage PRESENT IF "an instance

supports it",

 $outgoing {\tt ExternalIntraMSCH} and overs {\tt PerCellPackage} \ {\tt PRESENT} \ {\tt IF} \ "an instance$ 

supports it",

incomingExternalInterMSCHandoversPerCellPackage PRESENT IF "an instance

supports it",

outgoingExternalInterMSCHandoversPerCellPackage **PRESENT IF** "an instance supports it":

**REGISTERED AS** {gsm1204managedobjectClass 160};

externalHdoMeasurementFunctionPackage PACKAGE

#### **BEHAVIOUR**

externalHdoMeasurementFunctionBehaviour;

#### **ATTRIBUTES**

observedCell GET, adjacentCell GET;

REGISTERED AS {gsm1204package 160};

externalHdoMeasurementFunctionBehaviour BEHAVIOUR

#### **DEFINED AS**

"This object is defined to contain the various optional measurement packages and will exist in multiple instances. It can only be instantiated if the cell attribute belongs to the msc area which is served by the msc function that contain the external HDO measurement function. The scanner may scan attributes of the object class in various combinations and permutations of packages, and further may scan simultaneously as many times as necessary within the processing limits of the network.";

#### C.1.7 hlrMeasurementFunction

#### hlrMeasurementFunction MANAGED OBJECT CLASS

#### **DERIVED FROM**

"Recommendation X.721: 1992": top;

#### **CHARACTERIZED BY**

basicMeasurementFunctionPackage;

#### **CONDITIONAL PACKAGES**

msRoamingOutsideHPLMNPackage PRESENT IF "an instance

supports it",

authenticationSetsHLRToVLRPackage PRESENT IF "an instance

supports it",

insertSubscriberDataServicePackage PRESENT IF "an instance

supports it",

locationUpdatePackage PRESENT IF "an instance

supports it",

ssRelatedOperationsInHLRPackage PRESENT IF "an instance

supports it",

requestForSMRoutingPackage

supports it",

smDeliveryStatusReportProceduresPackage

supports it",

sendAlertsPackage

supports it",

requestForMSRNPackage

supports it";

**REGISTERED AS** {gsm1204managedobjectClass 170};

PRESENT IF "an instance

PRESENT IF "an instance

PRESENT IF "an instance

PRESENT IF "an instance

#### C.1.8 vlrMeasurementFunction

vlrMeasurementFunction MANAGED OBJECT CLASS

**DERIVED FROM** 

"Recommendation X.721: 1992": top;

**CHARACTERIZED BY** 

basicMeasurementFunctionPackage;

**CONDITIONAL PACKAGES** 

msMemoryAvailableNotificationsPackage PRESENT IF "an instance

supports it",

identificationRequestToPVLRPackage PRESENT IF "an instance

supports it",

pageRequestPackage PRESENT IF "an instance

supports it",

pageRequestPerLocationAreaPackage PRESENT IF "an instance

supports it",

authenticationSetsVLRToHLRPackage PRESENT IF "an instance

supports it",

authenticationInVLRPackage PRESENT IF "an instance

supports it",

intraVLRLocationUpdatePackage PRESENT IF "an instance

supports it",

interVLRLocationUpdatePackage PRESENT IF "an instance

supports it",

visitorsFromOtherPLMNPackage PRESENT IF "an instance

supports it";

**REGISTERED AS** {gsm1204managedobjectClass 180};

#### C.1.9 eirMeasurementFunction

eirMeasurementFunction MANAGED OBJECT CLASS

**DERIVED FROM** 

"Recommendation X.721: 1992": top;

**CHARACTERIZED BY** 

basicMeasurementFunctionPackage;

**CONDITIONAL PACKAGES** 

receivedIMEIcheckRequestPackage
whiteAnswersInEIRPackage
greyAnswersInEIRPackage
blackAnswersInEIRPackage
unknownIMEIAnswersInEIRPackage
present if "an instance supports it",
present i

**REGISTERED AS** {gsm1204managedobjectClass 190};

#### C.1.10 smsMeasurementFunction

smsMeasurementFunction MANAGED OBJECT CLASS

**DERIVED FROM** 

"Recommendation X.721: 1992": top;

**CHARACTERIZED BY** 

basicMeasurementFunctionPackage;

**CONDITIONAL PACKAGES** 

mobileOriginatingSMForwardingPackage PRESENT IF "an instance

supports it",

mobileTerminatingSMForwardingPackage PRESENT IF "an instance

supports it";

**REGISTERED AS** {gsm1204managedobjectClass 1101};

# C.1.11 sgsnMeasurementFunction

sgsnMeasurementFunction MANAGED OBJECT CLASS

**DERIVED FROM** 

"Recommendation X.721: 1992": top;

**CHARACTERIZED BY** 

basicMeasurementFunctionPackage;

**CONDITIONAL PACKAGES** 

sgsnLLCPackage PRESENT IF "an instance

supports it",

sgsnSNDCPPackage PRESENT IF "an instance

supports it",

gprsAttachPackage PRESENT IF "an instance

supports it",

gprsIMSIAttachPackage PRESENT IF "an instance

supports it",

gprsIMSIAIreadyAttachedPackage PRESENT IF "an instance

supports it",

gprsAttachedSubscribersPackage PRESENT IF "an instance

supports it",

gprsMSDetachPackage PRESENT IF "an instance

supports it",

gprsSGSNDetachPackage PRESENT IF "an instance

supports it",

gprsRouting AreaUpdatePackage PRESENT IF "an instance

supports it",

pTMSIReallocationPackage PRESENT IF "an instance

supports it",

sgsnHLRAuthenticationPackage PRESENT IF "an instance

supports it",

sgsnAuthenticationProcPackage PRESENT IF "an instance

supports it",

sgsnIdentityRequestPackage PRESENT IF "an instance

supports it",

sgsnCipheringModePackage PRESENT IF "an instance

supports it",

gprsSubsStandbyStatePackage PRESENT IF "an instance

supports it",

gprsSubsReadyStatePackage PRESENT IF "an instance

supports it",

sgsnIMEICheckRequestsPackage PRESENT IF "an instance

supports it",

PRESENT IF "an instance

whiteAnswersInSGSNPackage PRESENT IF "an instance supports it", greyAnswersInSGSNPackage PRESENT IF "an instance supports it", PRESENT IF "an instance blackAnswersInSGSNPackage supports it", unknownIMEIAnswersInSGSNPackage PRESENT IF "an instance supports it", sgsnPacketSwitched PagingPackage PRESENT IF "an instance supports it", sgsnPacketSwitched PagingPerRAPackage PRESENT IF "an instance supports it", sgsnPDPContextActivationByMSPackage PRESENT IF "an instance supports it", sgsnDynamicPDPContextActivationByMSPackage PRESENT IF "an instance supports it", sgsnPDPContextDeactivationByMSPackage PRESENT IF "an instance supports it", sgsnPDPContextDeactivationByGGSNPackage PRESENT IF "an instance supports it",

**REGISTERED AS** {gsm1204managedobjectClass 1110};

subscriberPDPContextsInSGSNPackage

# C.1.12 ggsnMeasurementFunction

ggsnMeasurementFunction MANAGED OBJECT CLASS

#### **DERIVED FROM**

supports it";

"Recommendation X.721: 1992": top;

#### **CHARACTERIZED BY**

basicMeasurementFunctionPackage;

#### **CONDITIONAL PACKAGES**

ggsnPDPContextActivationByMSPackage supports it",
ggsnDynamicPDPContextActivationByMSPackage supports it",
ggsnPDPContextDeactivationByMSPackage supports it",
ggsnPDPContextDeactivationByGGSNPackage supports it",
ActivePDPContextsAtGGSNPackage supports it";

PRESENT IF "an instance PRESENT IF

REGISTERED AS {gsm1204managedobjectClass 1120}

# C.2 Measurement Package Definitions

The following describes the individual measurements defined in GSM 12.04, annex B, as packages of attributes to be referenced by the appropriate managed object class.

# C.2.1 General Measurement Function Packages

# C.2.1.1 basicMeasurementFunctionPackage

basicMeasurementFunctionPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementFunctionBehaviour;

**ATTRIBUTES** 

measurementFunctionId GET:

**NOTIFICATIONS** 

"Recommendation X.721: 1992": objectCreation,

"Recommendation X.721: 1992": objectDeletion;

**REGISTERED AS** {gsm1204package 211};

# C.2.2 BSC Measurement Function Related Packages

# C.2.2.1 requestForServicePackage

requestForServicePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

unsuccReqsForService GET;

**REGISTERED AS** {gsm1204package 221};

# C.2.2.2 requestForServicePerCausePackage

requestForServicePerCausePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

unsuccReqsForServicePerCause **GET**;

REGISTERED AS {gsm1204package 222};

# C.2.2.3 interArrivalTimePackage

interArrivalTimePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanInterArrivalTime GET;

REGISTERED AS {gsm1204package 223};

#### C.2.2.4 pagingMessagePerBSCPackage

pagingMessagePerBSCPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attTransOfPagingMessagesPerBSC GET, unsuccTransOfPagingMessagesPerBSC GET;

**REGISTERED AS** {gsm1204package 224};

# C.2.2.5 immediateAssignmentProceduresPerBSCPackage

immediateAssignmentProceduresPerBSCPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attImmediateAssingProcsPerBSC GET, succImmediateAssingProcsPerBSC GET;

**REGISTERED AS** {gsm1204package 225};

### C.2.2.6 internalHandoversIntraCellPerBSCPackage

internalHandoversIntraCellPerBSCPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

succInternalHDOsIntraCellPerBSC GET, unsuccInternalHDOsIntraCellPerBSC GET:

**REGISTERED AS** {gsm1204package 226};

# C.2.2.7 internalHandoversPerBSCPackage

internalHandoversPerBSCPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

succInternalHDOsPerBSC GET;

**REGISTERED AS** {gsm1204package 227};

# C.2.2.8 internalHandoversPerCausePackage

internalHandoversPerCausePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

succInternalHDOsPerCause GET;

**REGISTERED AS** {gsm1204package 228};

# C.2.2.9 internalHandoverFailuresPerBSCPackage

internalHandoverFailuresPerBSCPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

unsuccInternalHDOsWithReconnectionPerBSC **GET**, unsuccInternalHDOsWithLossOfConnectionPerBSC **GET**;

**REGISTERED AS** {gsm1204package 229};

#### C.2.2.10 gprsPDUFlushReqPackage

gprsPDUFlushReqPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

FlushRegReceived GET

**REGISTERED AS** {gsm1204package 2210};

#### C.2.2.11 gprsPagingRequestPackage

gprsPagingRequestPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

pagingReqReceivedfromSGSN GET;

**REGISTERED AS** {gsm1204package 2211};

## C.2.2.12 gprsInterArrivalPackage

gprsInterArrivalPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanPSInterArrivalTime GET

**REGISTERED AS** {gsm1204package 2212};

# C.2.3 CELL Measurement Function Related Packages

# C.2.3.1 pchagchQueuePackage

pchagchQueuePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanPCHAGCHQueueLength GET;

**REGISTERED AS** {gsm1204package 231};

# C.2.3.2 pagingMessagePackage

pagingMessagePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attTransOfPagingMessagesThePCH GET, unsuccTransOfPagingMessagesThePCH GET;

REGISTERED AS {gsm1204package 232};

## C.2.3.3 immediateAssignmentProceduresPackage

immediateAssignmentProceduresPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attImmediateAssingProcs GET, succImmediateAssingProcs GET;

REGISTERED AS {gsm1204package 233};

# C.2.3.4 immediateAssignmentProceduresPerCausePackage

immediateAssignmentProceduresPerCausePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attImmediateAssingProcsPerCause GET, succImmediateAssingProcsPerCause GET;

**REGISTERED AS** {gsm1204package 234};

# C.2.3.5 pageDiscardPackage

pageDiscardPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfPagesDiscardedFromPCHQueue GET;

**REGISTERED AS** {gsm1204package 235};

# C.2.3.6 durationOfPagingProceduresPackage

durationOfPagingProceduresPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanDurationOfSuccPagingProcs GET;

**REGISTERED AS** {gsm1204package 236};

# C.2.3.7 tchAvailablePackage

tchAvailablePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfAvailableTCHs GET;

**REGISTERED AS** {gsm1204package 237};

# C.2.3.8 tchBusyPackage

tchBusyPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanNbrOfBusyTCHs GET, maxNbrOfBusyTCHs GET;

**REGISTERED AS** {gsm1204package 238};

#### C.2.3.9 idleTCHsPerInterferenceBandPackage

idleTCHPerInterferenceBandPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanNbrOfldleTCHsPerInterferenceBand **GET**;

REGISTERED AS {gsm1204package 239};

## C.2.3.10 tchSeizuresPackage

tchSeizuresPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attTCHSeizures GET, succTCHSeizures GET, attTCHSeizuresMeetingTCHBlockedState GET;

**REGISTERED AS** {gsm1204package 2310};

## C.2.3.11 tchAllocatedTimePackage

tchAllocatedTimePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

allAvailableTCHAllocatedTime GET;

**REGISTERED AS** {gsm1204package 2311};

# C.2.3.12 tchBusyTimePackage

tchBusyTimePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanTCHBusyTime GET;

**REGISTERED AS** {gsm1204package 2312};

# C.2.3.13 tchQueuePackage

tchQueuePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanTCHQueueLength GET;

REGISTERED AS {gsm1204package 2313};

# C.2.3.14 lostRadioLinksPerTCHPackage

lostRadioLinksPerTCHPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfLostRadioLinksTCH GET;

**REGISTERED AS** {gsm1204package 2314};

# C.2.3.15 sdcchAvailablePackage

sdcchAvailablePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfAvailableSDCCHs GET;

REGISTERED AS {gsm1204package 2315};

### C.2.3.16 sdcchBusyPackage

sdcchBusyPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanNbrOfBusySDCCHs GET, maxNbrOfBusySDCCHs GET;

**REGISTERED AS** {gsm1204package 2316};

# C.2.3.17 sdcchSeizuresPackage

sdcchSeizuresPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attSDCCHSeizuresMeetingSDCCHBlockedState

**REGISTERED AS** {gsm1204package 2317};

# C.2.3.18 sdcchAllocatedTimePackage

sdcchAllocatedTimePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

allAvailableSDCCHAllocatedTime **GET**;

**REGISTERED AS** {gsm1204package 2318};

# C.2.3.19 sdcchQueuePackage

sdcchQueuePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

GET:

**ATTRIBUTES** 

meanSDCCHQueueLength GET;

**REGISTERED AS** {gsm1204package 2319};

## C.2.3.20 lostRadioLinksPerSDCCHPackage

lostRadioLinksPerSDCCHPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfLostRadioLinksSDCCH GET:

REGISTERED AS {gsm1204package 2320};

## C.2.3.21 downlinkPowerControlPackage

downlinkPowerControlPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

relativeTimeDLPowerControlAtMax **GET**;

**REGISTERED AS** {gsm1204package 2321};

# C.2.3.22 uplinkPowerControlPackage

uplinkPowerControlPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

relativeTimeULPowerControlAtMax GET;

**REGISTERED AS** {gsm1204package 2322};

# C.2.3.23 internalHandoversIntraCellPackage

internalHandoversIntraCellPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

succInternalHDOsIntraCell GET, unsuccInternalHDOsIntraCell GET:

**REGISTERED AS** {gsm1204package 2323};

# C.2.3.24 incomingInternalInterCellHandoversPackage

incomingInternalInterCellHandoversPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attIncomingInternalInterCellHDOs GET, succIncomingInternalInterCellHDOs GET;

**REGISTERED AS** {gsm1204package 2324};

#### C.2.3.25 outgoingInternalInterCellHandoversPackage

outgoingInternalInterCellHandoversPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

attOutgoingInternalInterCellHDOs GET, succOutgoingInternalInterCellHDOs GET;

**REGISTERED AS** {gsm1204package 2325};

#### C.2.3.26 internalHandoverFailurePackage

internalHandoverFailurePackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

unsuccHDOsWithReconnection GET, unsuccHDOsWithLossOfConnection GET;

**REGISTERED AS** {gsm1204package 2326};

# C.2.3.27 gprsPDCHAvailablePackage

gprsPDCHAvailablePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

availablePDCH GET,
meanNbrAvailablePDCH GET,
maxNbrAvailablePDCH GET,
minNbrAvailablePDCH GET;

**REGISTERED AS** {gsm1204package 2327};

# C.2.3.28 gprsPDCHOccupiedPackage

gprsPDCHOccupiedPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

meanNbrOfOccPDCH GET,
maxNbrOfOccPDCH GET,
minNbrOfOccPDCH GET;

**REGISTERED AS** {gsm1204package 2328};

# C.2.3.29 gprsPDCHAllocatedPackage

gprsPDCHAllocatedPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

availablePDCH AllocatedTime GET;

REGISTERED AS {gsm1204package 2329};

#### C.2.3.30 gprsPCCCHPagingPackage

gprsPCCCHPagingPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrPacketPagingMessagesPCHOnPCCCH

**REGISTERED AS** {gsm1204package 2330};

GET;

#### C.2.3.31 gprsPPCHQueueOnPCCCHPackage

gprsPPCHQueueOnPCCCHPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanPPCHPAGCHQueueLengthOnPCCCH GET, nbrOfPSPagesDiscardedFromPPCHQueueOnPCCCH GET;

**REGISTERED AS** {gsm1204package 2331};

# C.2.3.32 gprsPDTCHAssignmentPackage

gprsPDTCHAssignmentPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attPCReqAssPerCause GET, succPDTCHAssProcsPerCause GET, succPDTCHSeizures GET;

**REGISTERED AS** {gsm1204package 2332};

# C.2.3.33 gprsPDTCHQueuePackage

gprsPDTCHQueuePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanPacketQueueLength GET;

**REGISTERED AS** {gsm1204package 2333};

# C.2.3.34 gprsCSChangePackage

gprsCSChangePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfServiceChanges GET;

REGISTERED AS {gsm1204package 2334};

# C.2.4 internal HDO Measurement Function Related Packages

# C.2.4.1 incomingInternalInterCellPerCellHandoversPackage

incomingInternalInterCellPerCellHandoversPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

attIncomingInternalInterCellHDOsPerOriginatingCell GET, succIncomingInternalInterCellHDOsPerOriginatingCell GET;

**REGISTERED AS** {gsm1204package 241};

# C.2.4.2 outgoingInternalInterCellPerCellHandoversPackage

outgoingInternalInterCellPerCellHandoversPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

attOutgoingInternalInterCellHDOsPerTargetCell**GET**, succOutgoingInternalInterCellHDOsPerTargetCell **GET** 

**REGISTERED AS** {gsm1204package 242};

# C.2.5 MSC Measurement Function Related Packages

# C.2.5.1 classMarkPackage

classMarkPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

nbrOfClassMarkUpdates

GET:

**REGISTERED AS** {gsm1204package 251};

# C.2.5.2 mobileOriginatingCallsPackage

mobileOriginatingCallsPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

attMobileOriginatingCalls
succMobileOriginatingCalls
ansMobileOriginatingCalls
GET,
GET,
GET;

**REGISTERED AS** {gsm1204package 252};

# C.2.5.3 mobileTerminatingCallsPackage

mobileTerminatingCallsPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

attMobileTerminatingCalls GET, succMobileTerminatingCalls GET,

ansMobileTerminatingCalls GET;

REGISTERED AS {gsm1204package 253};

#### C.2.5.4 mobileEmergencyCallsPackage

mobileEmergencyCallsPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attMobileEmergencyCalls
succMobileEmergencyCalls
ansMobileEmergencyCalls
GET,
GET,
GET;

**REGISTERED AS** {gsm1204package 254};

#### C.2.5.5 cipheringModePackage

cipheringModePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attCipheringModeControlProcs GET, succCipheringModeControlProcs GET;

REGISTERED AS {gsm1204package 255};

# C.2.5.6 interrogatingHLRPackage

interrogatingHLRPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attInterrogationOfHLRsForRouting GET, succInterrogationOfHLRsMSRNObtained GET, succInterrogationOfHLRsCallForwarding GET;

REGISTERED AS {gsm1204package 256};

# C.2.5.7 mobileOriginatingPointToPointSMPackage

mobileOriginatingPointToPointSMPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attOpForMobileOriginatingPointToPointSMs GET, succOpForMobileOriginatingPointToPointSMs GET;

**REGISTERED AS** {gsm1204package 257};

# C.2.5.8 mobileTerminatingPointToPointSMPackage

mobileTerminatingPointToPointSMPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attOpForMobileTerminatingPointToPointSMs **GET**, succOpForMobileTerminatingPointToPointSMs **GET**;

REGISTERED AS {gsm1204package 258};

## C.2.5.9 imeiRequestPackage

imeiRequestPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfTransCheckIMEIRequests GET;

**REGISTERED AS** {gsm1204package 259};

#### C.2.5.10 whiteAnswersInMSCPackage

whiteAnswersInMSCPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfWhiteAnsInMSC GET;

**REGISTERED AS** {gsm1204package 2510};

# C.2.5.11 greyAnswersInMSCPackage

greyAnswersInMSCPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfGreyAnsInMSC GET;

**REGISTERED AS** {gsm1204package 2511};

# C.2.5.12 blackAnswersInMSCPackage

blackAnswersInMSCPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfBlackAnsInMSC GET;

**REGISTERED AS** {gsm1204package 2512};

# C.2.5.13 unknownIMEIAnswersInMSCPackage

unknownIMEIAnswersInMSCPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfUnknownIMEIAnsInMSC GET;

**REGISTERED AS** {gsm1204package 2513};

# C.2.5.14 callSetupServicePackage

callSetupServicePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

meanTimeToCallSetupService GET;

**REGISTERED AS** {gsm1204package 2514};

## C.2.5.15 locationUpdatingServicePackage

locationUpdatingServicePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

meanTimeToLocationUpdateService GET;

REGISTERED AS {gsm1204package 2515};

# C.2.5.16 subscriberIdentifiedWithTMSIPackage

subscriberIdentifiedWithTMSIPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

transSubIdentifiedWithTMSI GET;

**REGISTERED AS** {gsm1204package 2516};

# C.2.5.17 subscriberIdentifiedWithIMSIPackage

subscriberIdentifiedWithIMSIPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

transSubIdentifiedWithIMSI GET;

**REGISTERED AS** {gsm1204package 2517};

## C.2.5.18 tmsiReallocationsPackage

tmsiReallocationsPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attTMSIReallocations GET, succTMSIReallocations GET;

**REGISTERED AS** {gsm1204package 2518};

# C.2.5.19 imsiDetachProceduresPackage

imsiDetachProceduresPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

imsiDetachProcs GET, imsiAttachProcs GET:

**REGISTERED AS** {gsm1204package 2519};

# C.2.5.20 incomingExternalIntraMSCHandoversPackage

incomingExternalIntraMSCHandoversPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attIncomingExternalIntraMSCHDOs GET, succIncomingExternalIntraMSCHDOs GET;

**REGISTERED AS** {gsm1204package 2520};

## C.2.5.21 outgoingExternalIntraMSCHandoversPackage

outgoingExternalIntraMSCHandoversPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attOutgoingExternalIntraMSCHDOs GET, succOutgoingExternalIntraMSCHDOs GET;

**REGISTERED AS** {gsm1204package 2521};

# C.2.5.22 incomingInterMSCHandoversPackage

incomingInterMSCHandoversPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attIncomingInterMSCHDOs GET, succIncomingInterMSCHDOs GET;

**REGISTERED AS** {gsm1204package 2522};

# C.2.5.23 outgoingInterMSCHandoversPackage

outgoingInterMSCHandoversPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attOutgoingInterMSCHDOs GET, succOutgoingInterMSCHDOs GET;

REGISTERED AS {gsm1204package 2523};

# C.2.5.24 subsequentInterMSCHandoversToMACaPackage

subsequentInterMSCHandoversToMACaPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attSubsequentInterMSCHDOsMSCa GET, succSubsequentInterMSCHDOsMSCa GET;

REGISTERED AS {gsm1204package 2524};

# C.2.5.25 subsequentInterMSCHandoversToMACcPackage

subsequentInterMSCHandoversToMACcPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attSubsequentInterMSCHDOsMSCc GET, succSubsequentInterMSCHDOsMSCc GET;

**REGISTERED AS** {gsm1204package 2525};

## C.2.5.26 externalHandoversPackage

externalHandoversPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

externalHDOs GET;

**REGISTERED AS** {gsm1204package 2526};

## C.2.5.27 externalHandoversPerCausePackage

externalHandoversPerCausePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

externalHDOsPerCause GET;

**REGISTERED AS** {gsm1204package 2527};

## C.2.5.28 externalHandoverFailurePerMSCPackage

externalHandoverFailurePerMSCPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

unsuccExternHDOsWithReconnectionPerMSC **GET**, unsuccExternHDOsWithLossOfConnectionPerMSC **GET**;

REGISTERED AS {gsm1204package 2528};

# C.2.6 external HDO Measurement Function Related Packages

# C.2.6.1 incomingExternalIntraMSCHandoversPerCellPackage

incomingExternalIntraMSCHandoversPerCellPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attIncomingExternalIntraMSCHDOsPerOriginatingCell**GET**, succIncomingExternalIntraMSCHDOsPerOriginatingCell **GET**;

REGISTERED AS {gsm1204package 261};

# C.2.6.2 outgoingExternalIntraMSCHandoversPerCellPackage

outgoingExternalIntraMSCHandoversPerCellPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

attOutgoingExternalIntraMSCHDOsPerTargetCell GET, succOutgoingExternalIntraMSCHDOsPerTargetCell GET;

**REGISTERED AS** {gsm1204package 262};

## C.2.6.3 incomingExternalInterMSCHandoversPerCellPackage

incomingExternalInterMSCHandoversPerCellPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

## **ATTRIBUTES**

attIncomingInterMSCHDOsPerOriginatingCell GET, succIncomingInterMSCHDOsPerOriginatingCell GET;

**REGISTERED AS** {gsm1204package 263};

## C.2.6.4 outgoingExternalInterMSCHandoversPerCellPackage

outgoingExternalInterMSCHandoversPerCellPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

attOutgoingInterMSCHDOsPerTargetCell GET,

succOutgoingInterMSCHDOsPerTargetCell GET;

REGISTERED AS {gsm1204package 264};

# C.2.7 HLR Measurement Function Related Packages

# C.2.7.1 msRoamingOutsideHPLMNPackage

msRoamingOutsideHPLMNPackage PACKAGE

#### **BEHAVIOUR**

general Measurement Package Behaviour;

#### **ATTRIBUTES**

nbrOfCurrentMSsRoamingOutsideHPLMN

**REGISTERED AS** {gsm1204package 271};

# C.2.7.2 authenticationSetsHLRToVLRPackage

authenticationSetsHLRToVLRPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

## **ATTRIBUTES**

attReqForAuthSetsReceivedByHLRFromVLRs GET, succReturnedAuthSetsFromHLRToVLRs GET, emptyResponsesForAuthSetsFromHLRToVLRs GET;

**REGISTERED AS** {gsm1204package 272};

# C.2.7.3 insertSubscriberDataServicePackage

insertSubscriberDataServicePackage PACKAGE

### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

GET:

**ATTRIBUTES** 

attInsertSubDataService GET, succInsertSubDataService GET;

**REGISTERED AS** {gsm1204package 273};

# C.2.7.4 locationUpdatePackage

locationUpdatePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attLocationUpdate GET, succLocationUpdate GET;

**REGISTERED AS** {gsm1204package 274};

## C.2.7.5 ssRelatedOperationsInHLRPackage

ssRelatedOperationsInHLRPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attSSRelatedOperationsInHLR GET, succSSRelatedOperationsInHLR GET;

**REGISTERED AS** {gsm1204package 275};

## C.2.7.6 requestForSMRoutingPackage

requestForSMRoutingPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attReqForSMRoutingInfo GET, succReqForSMRoutingInfo GET;

REGISTERED AS {gsm1204package 276};

# C.2.7.7 smDeliveryStatusReportProceduresPackage

smDeliveryStatusReportProceduresPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attSMDeliveryStatusReportProcs GET, succSMDeliveryStatusReportProcs GET;

**REGISTERED AS** {gsm1204package 277};

# C.2.7.8 sendAlertsPackage

sendAlertsPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attNbrOfSendAlerts GET, succNbrOfSendAlerts GET;

REGISTERED AS {gsm1204package 278};

# C.2.7.9 requestForMSRNPackage

requestForMSRNPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attReqForMSRN GET, succReqForMSRN GET;

**REGISTERED AS** {gsm1204package 279};

# C.2.8 VLR Measurement Function Related Packages

# C.2.8.1 msMemoryAvailableNotificationsPackage

msMemoryAvailableNotificationsPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attMSMemoryAvailableNotifications GET, succMSMemoryAvailableNotifications GET;

REGISTERED AS {gsm1204package 281};

# C.2.8.2 identificationRequestToPVLRPackage

identificationRequestToPVLRPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attIdentificationReqToPVLRs GET, succIdentificationReqToPVLRs GET;

REGISTERED AS {gsm1204package 282};

# C.2.8.3 pageRequestPackage

pageRequestPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attPageReqs GET, succPageReqs GET;

REGISTERED AS {gsm1204package 283};

# C.2.8.4 pageRequestPerLocationAreaPackage

pageRequestPerLocationAreaPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attPageReqsPerLocationArea GET, succPageReqsPerLocationArea GET;

REGISTERED AS {gsm1204package 284};

## C.2.8.5 authenticationSetsVLRToHLRPackage

authenticationSetsVLRToHLRPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attReqForAuthSetsSentToHLR GET, succReceivedAuthSetsFromHLR GET, emptyResponsesForAuthFromHLR GET;

REGISTERED AS {gsm1204package 285};

# C.2.8.6 authenticationInVLRPackage

authenticationInVLRPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attAuthProcsInVLR GET, succAuthProcsInVLR GET;

**REGISTERED AS** {gsm1204package 286};

# C.2.8.7 intraVLRLocationUpdatePackage

intraVLRLocationUpdatePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attIntraVLRLocationUpdates GET, succIntraVLRLocationUpdates GET;

**REGISTERED AS** {gsm1204package 287};

# C.2.8.8 interVLRLocationUpdatePackage

interVLRLocationUpdatePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attInterVLRLocationUpdates GET, succInterVLRLocationUpdates GET;

REGISTERED AS {gsm1204package 288};

# C.2.8.9 visitorsFromOtherPLMNPackage

visitorsFromOtherPLMNPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

arrivalOfVisitorsFromOtherPLMNs GET;

**REGISTERED AS** {gsm1204package 289};

# C.2.9 EIR Measurement Function Related Packages

## C.2.9.1 receivedIMEIcheckRequestPackage

receivedIMEIcheckRequestPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfReceivedIMEICheckReqs GET;

**REGISTERED AS** {gsm1204package 291};

## C.2.9.2 whiteAnswersInEIRPackage

whiteAnswersInEIRPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfWhiteAnsInEIR **GET**;

**REGISTERED AS** {gsm1204package 292};

# C.2.9.3 greyAnswersInEIRPackage

greyAnswersInEIRPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfGreyAnsInEIR **GET**;

**REGISTERED AS** {gsm1204package 293};

# C.2.9.4 blackAnswersInEIRPackage

blackAnswersInEIRPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfBlackAnsInEIR GET;

REGISTERED AS {gsm1204package 294};

# C.2.9.5 unknownIMEIAnswersInEIRPackage

unknownIMEIAnswersInEIRPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfUnknownIMEIAnsInEIR GET;

**REGISTERED AS** {gsm1204package 295};

# C.2.10 SMS Measurement Function Related Packages

# C.2.10.1 mobileOriginatingSMForwardingPackage

mobileOriginatingSMForwardingPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

### **ATTRIBUTES**

attMobileOriginatingSMForwardings GET, succMobileOriginatingSMForwardings GET;

**REGISTERED AS** {gsm1204package 2101};

## C.2.10.2 mobileTerminatingSMForwardingPackage

mobileTerminatingSMForwardingPackage PACKAGE

## **BEHAVIOUR**

generalMeasurementPackageBehaviour;

### **ATTRIBUTES**

attMobileTerminatingSMForwardings GET, succMobileTerminatingSMForwardings GET;

REGISTERED AS {gsm1204package 2102};

# C.2.11 SGSN Measurement Function Related Packages

## C.2.11.1 sgsnLLCPackage

sgsnLLCPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

#### **ATTRIBUTES**

nbrLlcFramesSentGET,nbrllcFramesReceivedGET,errLlcFramesDetectedBySgsnGET,retransmittedLlcFramestoMsGET;

**REGISTERED AS** {gsm1204package 2111};

## C.2.11.2 sgsnSNDCPPackage

sgsnSNDCPPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

### **ATTRIBUTES**

uplinkSndcpNpduReceived GET, uplinkSndcpOctetReceivedMode downlinkSndcpNpdusent GET, downlinkSndcpOctetSent GET;

**REGISTERED AS** {gsm1204package 2112};

# C.2.11.3 gprsAttachPackage

gprsAttachPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

## **ATTRIBUTES**

attGprsAttach GET, succGprsAttach GET;

**REGISTERED AS** {gsm1204package 2113};

## C.2.11.4 gprsIMSIAttachPackage

## gprsIMSIAttachPackage PACKAGE

### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

### **ATTRIBUTES**

attCombiAttach GET, succCombiAttach GET;

**REGISTERED AS** {gsm1204package 2114};

## C.2.11.5 gprsIMSIAIreadyAttachedPackage

gprsIMSIAIreadyAttachedPackage PACKAGE

## **BEHAVIOUR**

generalMeasurementPackageBehaviour;

### **ATTRIBUTES**

attlmsiAttach GET, succlmsiAttach GET;

REGISTERED AS {gsm1204package 2115};

# C.2.11.6 gprsAttachedSubscribersPackage

gprsAttachedSubscribersPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

## **ATTRIBUTES**

nbrOfAttachedSubGET,meanNbrOfAttachedSubGET,maxNbrOfAttachedSubGET;

**REGISTERED AS** {gsm1204package 2116};

# C.2.11.7 gprsMSDetachPackage

gprsMSDetachPackage PACKAGE

### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

### **ATTRIBUTES**

attGprsDetachMs GET, attCombiDetachMs GET, attImsiDetachMs GET;

**REGISTERED AS** {gsm1204package 2117};

# C.2.11.8 gprsSGSNDetachPackage

gprsSGSNDetachPackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

### **ATTRIBUTES**

attGprsdetachSgsn GET, succGprsdetachSgsn GET;

**REGISTERED AS** {gsm1204package 2118};

## C.2.11.9 gprsRouting AreaUpdatePackage

gprsRouting AreaUpdatePackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attltraSgsnRaUpdate GET, succIntraSgsnRaUpdate GET, attInterSgsnRaUpdate GET, succInterSgsnRaUpdate GET;

**REGISTERED AS** {gsm1204package 2119};

# C.2.11.10 pTMSIReallocationPackage

pTMSIReallocationPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attPTMSIRealloc GET, succPTMSIrealloc GET;

**REGISTERED AS** {gsm1204package 21110};

# C.2.11.11 sgsnHLRAuthenticationPackage

sgsnHLRAuthenticationPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attreqAuthSetsSentToHlrBySgsn GET, succReqAuthSetsHlr GET, emptyResponsesForAuthSetsFromHlr GET;

**REGISTERED AS** {gsm1204package 21111};

# C.2.11.12 sgsnAuthenticationProcPackage

sgsnAuthenticationProcPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attAuthInSgsn GET, succAuthInSgsn GET;
REGISTERED AS {gsm1204package 21112};

# C.2.11.13 sgsnldentityRequestPackage

sgsnldentityRequestPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attIdentityReq GET, succIdentityReq GET; REGISTERED AS {gsm1204package 21113};

## C.2.11.14 sgsnCipheringModePackage

sgsnCipheringModePackage PACKAGE

### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

### **ATTRIBUTES**

attCipheringModeControlPerSgsn GET,

succCipheringModeControlPerSgsn GET;

REGISTERED AS {gsm1204package 21114};

## C.2.11.15 gprsSubsStandbyStatePackage

gprsSubsStandbyStatePackage PACKAGE

#### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

## **ATTRIBUTES**

nbrOfSubStandby GET,
meanNbrOfSubStandby GET,
maxNbrOfSubStandby GET;
REGISTERED AS {gsm1204package 21115};

## C.2.11.16 gprsSubsReadyStatePackage

gprsSubsReadyStatePackage PACKAGE

### **BEHAVIOUR**

generalMeasurementPackageBehaviour;

## **ATTRIBUTES**

nbrOfSubReady GET,
meanNbrOfSubReady GET,
maxNbrOfSubReady GET;

**REGISTERED AS** {gsm1204package 21116};

# C.2.11.17 sgsnIMEICheckRequestsPackage

sgsnIMEICheckRequestsPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfCheckIMEIRequests **GET**;

**REGISTERED AS** {gsm1204package 21117};

## C.2.11.18 whiteAnswersInSGSNPackage

whiteAnswersInSGSNPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfWhiteAnswerInSgsn GET;

REGISTERED AS {gsm1204package 21118};

# C.2.11.19 greyAnswersInSGSNPackage

greyAnswersInSGSNPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfGreyAnswerInSgsn GET;

REGISTERED AS {gsm1204package 21119};

## C.2.11.20 blackAnswersInSGSNPackage

blackAnswersInSGSNPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfBlackAnswerInSgsn GET;

**REGISTERED AS** {gsm1204package 21120};

# C.2.11.21 unknownIMEIAnswersInSGSNPackage

unknownIMEIAnswersInSGSNPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfUnknownAnswerInSgsn **GET**;

**REGISTERED AS** {gsm1204package 21121};

## C.2.11.22 sgsnPacketSwitched PagingPackage

sgsnPacketSwitched PagingPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attPacketSwitchedPaging GET,

unsuccPacketSwitchedPaging GET;

**REGISTERED AS** {gsm1204package 21122};

# C.2.11.23 sgsnPacketSwitched PagingPerRAPackage

sgsnPacketSwitched PagingPerRAPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attPsPagingPerRoutingArea GET,

unsuccPsPagingPerRoutingArea GET;

**REGISTERED AS** {gsm1204package 21123};

## C.2.11.24 sgsnPDPContextActivationByMSPackage

sgsnPDPContextActivationByMSPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attActPdpContextMSPerSgsn GET, succActPdpContextMSPerSgsn GET;

**REGISTERED AS** {gsm1204package 21124};

## C.2.11.25 sgsnDynamicPDPContextActivationByMSPackage

sgsnDynamicPDPContextActivationByMSPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attActPdpContextDynMSPerSgsn GET, succActPdpContextDynMSPerSgsn GET;

**REGISTERED AS** {gsm1204package 21125};

## C.2.11.26 sgsnPDPContextDeactivationByMSPackage

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attDeactPdpContextMsPerSgsn GET, succDeactPdpContextMsPerSgsn GET;

**REGISTERED AS** {gsm1204package 21126};

# C.2.11.27 sgsnPDPContextDeactivationByGGSNPackage

sgsnPDPContextDeactivationByGGSNPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attDeactPdpContextGgsnPerSgsn GET, succDeactPdpContextGgsnPerSgsn GET;

**REGISTERED AS** {gsm1204package 21127};

# C.2.11.28 subscriberPDPContextsAtSGSNPackage

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrSubsWithActivePdpInSgsn GET,

7meanSubsWithActivePdpInSgsn GET, nmaxSubsWithActivePdpInSgsn GET;

**REGISTERED AS** {gsm1204package 21128};

# C.2.12 GGSN Measurement Function Related Packages

# C.2.12.1 ggsnPDPContextActivationByMSPackage

ggsnPDPContextActivationByMSPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attActPdpContextPerApnOfGgsn GET,

succActPdpContextPerApnOfGgsn **GET**; **REGISTE7RED AS** {gsm1204package 2121}

## C.2.12.2 ggsnDynamicPDPContextActivationByMSPackage

ggsnDynamicPDPContextActivationByMSPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attActPdpContextDnyPerApnOfGgsn GET, succActPdpContextDnyPerApnOfGgsn GET;

REGISTERED AS {gsm1204package 2122};

# C.2.12.3 ggsnPDPContextDeactivationByMSPackage

ggsnPDPContextDeactivationByMSPackage PACKAGE

**BEHA7VIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attDeactPdpContextMsPerApnOfGgsn GET, succDeactPdpContextMsPerApnOfGgsn GET;

**REGISTERED AS** {gsm1204package 2123};

# C.2.12.4 ggsnPDPContextDeactivationByGGSNPackage

ggsnPDPContextDeactivationByGGSNPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

attDeactPdpContextByGgsnPerApn GET, succDeactPdpContextByGgsnMsPerApn GET;

**REGISTERED AS** {gsm1204package 2124};

# C.2.12.5 ActivePDPContextsAtGGSNPackage

ActivePDPContextsAtGGSNPackage PACKAGE

**BEHAVIOUR** 

generalMeasurementPackageBehaviour;

**ATTRIBUTES** 

nbrOfActivePdpContextsPerApnAtGgsn GET,

meanNbrOfActivePdpContextsPerApnAtGgsn GET, maxNbrOfActivePdpContextsPerApnAtGgsn GET;

**REGISTERED AS** {gsm1204package 2125};

# C.3 Measurement Attribute Definitions

## C.3.1 General Measurement Function Related Attributes

## C.3.1.1 measurementFunctionId

### measurementFunctionId ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementFunctionId;

#### **BEHAVIOUR**

measurementFunctionIdBehaviour;

**REGISTERED AS** {gsm1204attribute 311};

#### measurementFunctionIdBehaviour BEHAVIOUR

#### **DEFINED AS**

"This is the identity of the measurement function";

## C.3.1.2 observedCell

#### observedCell ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMCellName;

### **BEHAVIOUR**

observedCellBehaviour;

**REGISTERED AS** {gsm1204attribute 312};

## observedCellBehaviour BEHAVIOUR

## **DEFINED AS**

"This is the Cell that is to be observed for this measurement";

# C.3.1.3 adjacentCell

### adjacentCell ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMCellName;

## **BEHAVIOUR**

adj7acentCellBehaviour;

**REGISTERED AS** {gsm1204attribute 313};

## adjacentCellBehaviour BEHAVIOUR

## **DEFINED AS**

"This is the Cell that is adjacent to the observed cell for this measurement";

# C.3.2 BSC Measurement Function Related Attributes

# C.3.2.1 unsuccReqsForService

## unsuccReqsForService ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;
REGISTERED AS {gsm1204attribute 321};

## C.3.2.2 unsuccReqsForServicePerCause

unsuccRegsForServicePerCause ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType3;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 322};

## C.3.2.3 meanInterArrivalTime

meanInterArrivalTime ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 323};

# C.3.2.4 attTransOfPagingMessagesPerBSC

attTransOfPagingMessagesPerBSC ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 324};

77

# C.3.2.5 unsuccTransOfPagingMessagesPerBSC

unsuccTransOfPagingMessagesPerBSC ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 325};

# C.3.2.6 attImmediateAssingProcsPerBSC

attImmediateAssingProcsPerBSC ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 326};

# C.3.2.7 succImmediateAssingProcsPerBSC

succImmediateAssingProcsPerBSC ATTRIBUTE
WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 327};

## C.3.2.8 succInternalHDOsIntraCellPerBSC

succInternalHDOsIntraCellPerBSC ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 328};

## C.3.2.9 unsuccinternalHDOsIntraCellPerBSC

unsuccinternalHDOsIntraCellPerBSC ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 329};

## C.3.2.10 succInternalHDOsPerBSC

succInternalHDOsPerBSC ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3210};

## C.3.2.11 succInternalHDOsPerCause

succInternalHDOsPerCause ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType3;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3211};

## C.3.2.12 unsuccInternalHDOsWithReconnectionPerBSC

unsuccInternalHDOsWithReconnectionPerBSC ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3212};

## C.3.2.13 unsuccInternalHDOsWithLossOfConnectionPerBSC

unsuccInternalHDOsWithLossOfConnectionPerBSC ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3213};

## C.3.2.14 flushRequestReceived

flushRequestReceived ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3214};

# C.3.2.15 pagingReqReceivedfromSgsn

pagingReqReceivedfromSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3215};

## C.3.2.16 meanPSInterArrivalTime

meanPSInterArrivalTime ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3216};

# C.3.3 CELL Measurement Function Related Attributes

# C.3.3.1 meanPCHAGCHQueueLength

meanPCHAGCHQueueLength ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 331};

# C.3.3.2 attTransOfPagingMessagesThePCH

attTransOfPagingMessagesThePCH ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204 Type Module. GSM Measurement Type 1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 332};

# C.3.3.3 unsuccTransOfPagingMessagesThePCH

unsuccTransOfPagingMessagesThePCH ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 333};

# C.3.3.4 attImmediateAssingProcs

attImmediateAssingProcs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 334};

# C.3.3.5 succImmediateAssingProcs

succImmediateAssingProcs ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 335};

# C.3.3.6 attImmediateAssingProcsPerCause

attImmediateAssingProcsPerCause ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType3;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 336};

# C.3.3.7 succImmediateAssingProcsPerCause

succImmediateAssingProcsPerCause ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType3;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 337};

# C.3.3.8 nbrOfPagesDiscardedFromPCHQueue

nbrOfPagesDiscardedFromPCHQueue ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;
REGISTERED AS {gsm1204attribute 338};

# C.3.3.9 meanDurationOfSuccPagingProcs

meanDurationOfSuccPagingProcs ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 339};

## C.3.3.10 nbrOfAvailableTCHs

nbrOfAvailableTCHs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3310};

# C.3.3.11 meanNbrOfBusyTCHs

meanNbrOfBusyTCHs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3311};

# C.3.3.12 maxNbrOfBusyTCHs

maxNbrOfBusyTCHs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3312};

## C.3.3.13 meanNbrOfldleTCHsPerInterferenceBand

meanNbrOfldleTCHsPerInterferenceBand ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType4;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3313};

## C.3.3.14 attTCHSeizures

attTCHSeizures ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3314};

## C.3.3.15 succTCHSeizures

succTCHSeizures ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3315};

## C.3.3.16 attTCHSeizuresMeetingTCHBlockedState

attTCHSeizuresMeetingTCHBlockedState ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3316};

## C.3.3.17 allAvailableTCHAllocatedTime

allAvailableTCHAllocatedTime ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3317};

# C.3.3.18 meanTCHBusyTime

meanTCHBusyTime ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3318};

# C.3.3.19 meanTCHQueueLength

meanTCHQueueLength ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3319};

## C.3.3.20 nbrOfLostRadioLinksTCH

### nbrOfLostRadioLinksTCH ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3320};

## C.3.3.21 nbrOfAvailableSDCCHs

### nbrOfAvailableSDCCHs ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 3321};

# C.3.3.22 meanNbrOfBusySDCCHs

## meanNbrOfBusySDCCHs ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3322};

## C.3.3.23 maxNbrOfBusySDCCHs

### maxNbrOfBusySDCCHs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3323};

# C.3.3.24 attSDCCHSeizuresMeetingSDCCHBlockedState

attSDCCHSeizuresMeetingSDCCHBlockedState ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3324};

## C.3.3.25 allAvailableSDCCHAllocatedTime

## allAvailableSDCCHAllocatedTime ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3325};

## C.3.3.26 meanSDCCHQueueLength

### meanSDCCHQueueLength ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3326};

## C.3.3.27 nbrOfLostRadioLinksSDCCH

### nbrOfLostRadioLinksSDCCH ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3327};

## C.3.3.28 relativeTimeDLPowerControlAtMax

### relativeTimeDLPowerControlAtMax ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3328};

## C.3.3.29 relativeTimeULPowerControlAtMax

## relativeTimeULPowerControlAtMax ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3329};

## C.3.3.30 succInternalHDOsIntraCell

## succInternalHDOsIntraCell ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3330};

## C.3.3.31 unsuccInternalHDOsIntraCell

## unsuccinternalHDOsIntraCell ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;
REGISTERED AS {gsm1204attribute 3331};

# C.3.3.32 attIncomingInternalInterCellHDOs

attIncomingInternalInterCellHDOs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3332};

# C.3.3.33 succIncomingInternalInterCellHDOs

succincomingInternalInterCellHDOs ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3333};

# C.3.3.34 attOutgoingInternalInterCellHDOs

attOutgoingInternalInterCellHDOs ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3334};

# C.3.3.35 succOutgoingInternalInterCellHDOs

succOutgoingInternalInterCellHDOs ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3335};

## C.3.3.36 unsuccHDOsWithReconnection

unsuccHDOsWithReconnection ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3336};

## C.3.3.37 unsuccHDOsWithLossOfConnection

unsuccHDOsWithLossOfConnection ATTRIBUTE WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3337};

## C.3.3.38 availablePDCH

### availablePDCH ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3338};

## C.3.3.39 meanNbrAvailablePDCH

## meanNbrAvailablePDCH ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3339};

## C.3.3.40 maxNbrAvailablePDCH

## maxNbrAvailablePDCH ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3340};

## C.3.3.41 minNbrAvailablePDCH

### minNbrAvailablePDCH ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3341};

## C.3.3.42 meanNbrOfOccPDCH

## meanNbrOfOccPDCH ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3342};

## C.3.3.43 maxNbrOfOccPDCH

### maxNbrOfOccPDCH ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3343};

## C.3.3.44 minNbrOfOccPDCH

### minNbrOfOccPDCH ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3344};

## C.3.3.45 available PDCHAllocated Time

#### availablePDCHAllocatedTime ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3345};

# C.3.3.46 nbrPacketPagingMessagesPCHOnPCCCH

nbrPacketPagingMessagesPCHOnPCCCH ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3346};

# C.3.3.47 meanPPCHPAGCHQueueLengthOnPCCCH

## meanPPCHPAGCHQueueLengthOnPCCCH ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3347};

# C.3.3.48 nbrOfPSPagesDiscardedFromPPCHQueueOnPCCCH

nbrOfPSPagesDiscardedFromPPCHQueueOnPCCCH ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3348};

# C.3.3.49 attPCReqAssPerCause

### attPCReqAssPerCause ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3349};

## C.3.3.50 succPDTCHAssProcsPerCause

### succPDTCHAssProcsPerCause ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3350};

## C.3.3.51 succPDTCHSeizures

### succPDTCHSeizures ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 3351};

# C.3.3.52 meanPacketQueueLength

## meanPacketQueueLength ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3352};

# C.3.3.53 nbrOfServiceChanges

## nbrOfServiceChanges ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 3353};

# C.3.4 internal HDO Measurement Function Related Attributes

## C.3.4.1 attIncomingInternalInterCellHDOsPerOriginatingCell

attIncomingInternalInterCellHDOsPerOriginatingCell ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 341};

## C.3.4.2 succIncomingInternalInterCellHDOsPerOriginatingCell

succIncomingInternalInterCellHDOsPerOriginatingCell ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 342};

## C.3.4.3 attOutgoingInternalInterCellHDOsPerTargetCell

attOutgoingInternalInterCellHDOsPerTargetCell ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 343};

# C.3.4.4 succOutgoingInternalInterCellHDOsPerTargetCell

succOutgoingInternalInterCellHDOsPerTargetCell ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 344};

## C.3.5 MSC Measurement Function Related Attributes

# C.3.5.1 nbrOfClassMarkUpdates

nbrOfClassMarkUpdates ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 351};

## C.3.5.2 attMobileOriginatingCalls

attMobileOriginatingCalls ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 352};

# C.3.5.3 succMobileOriginatingCalls

succMobileOriginatingCalls ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 353};

## C.3.5.4 ansMobileOriginatingCalls

ansMobileOriginatingCalls ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 354};

# C.3.5.5 attMobileTerminatingCalls

attMobileTerminatingCalls ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 355};

# C.3.5.6 succMobileTerminatingCalls

succMobileTerminatingCalls ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 356};

# C.3.5.7 ansMobileTerminatingCalls

ansMobileTerminatingCalls ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 357};

# C.3.5.8 attMobileEmergencyCalls

## attMobileEmergencyCalls ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 358};

# C.3.5.9 succMobileEmergencyCalls

## succMobileEmergencyCalls ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 359};

## C.3.5.10 ansMobileEmergencyCalls

## ansMobileEmergencyCalls ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3510};

# C.3.5.11 attCipheringModeControlProcs

## attCipheringModeControlProcs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3511};

# C.3.5.12 succCipheringModeControlProcs

## succCipheringModeControlProcs ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3512};

# C.3.5.13 attInterrogationOfHLRsForRouting

## attInterrogationOfHLRsForRouting ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;
REGISTERED AS {gsm1204attribute 3513};

## C.3.5.14 succInterrogationOfHLRsMSRNObtained

succInterrogationOfHLRsMSRNObtained ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3514};

## C.3.5.15 succInterrogationOfHLRsCallForwarding

succInterrogationOfHLRsCallForwarding ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3515};

# C.3.5.16 attOpForMobileOriginatingPointToPointSMs

attOpForMobileOriginatingPointToPointSMs ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3516};

# C.3.5.17 succOpForMobileOriginatingPointToPointSMs

succOpForMobileOriginatingPointToPointSMs ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3517};

# C.3.5.18 attOpForMobileTerminatingPointToPointSMs

attOpForMobileTerminatingPointToPointSMs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3518};

# C.3.5.19 succOpForMobileTerminatingPointToPointSMs

succOpForMobileTerminatingPointToPointSMs ATTRIBUTE WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3519};

# C.3.5.20 nbrOfTransCheckIMEIRequests

## nbrOfTransCheckIMEIRequests ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3520};

## C.3.5.21 nbrOfWhiteAnsInMSC

## nbrOfWhiteAnsInMSC ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3521};

## C.3.5.22 nbrOfGreyAnsInMSC

## nbrOfGreyAnsInMSC ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3522};

## C.3.5.23 nbrOfBlackAnsInMSC

### nbrOfBlackAnsInMSC ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3523};

## C.3.5.24 nbrOfUnknownIMEIAnsInMSC

## nbrOfUnknownIMEIAnsInMSC ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

general Measurement Attribute Behaviour;

**REGISTERED AS** {gsm1204attribute 3524};

## C.3.5.25 meanTimeToCallSetupService

meanTimeToCallSetupService ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3525};

## C.3.5.26 meanTimeToLocationUpdateService

meanTimeToLocationUpdateService ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType2;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 3526};

## C.3.5.27 transSubIdentifiedWithTMSI

transSubIdentifiedWithTMSI ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3527};

## C.3.5.28 transSubIdentifiedWithIMSI

transSubIdentifiedWithIMSI ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3528};

## C.3.5.29 attTMSIReallocations

attTMSIReallocations ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3529};

## C.3.5.30 succTMSIReallocations

succTMSIReallocations ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3530};

## C.3.5.31 imsiDetachProcs

imsiDetachProcs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3531};

## C.3.5.32 imsiAttachProcs

imsiAttachProcs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3532};

## C.3.5.33 attIncomingExternalIntraMSCHDOs

attIncomingExternalIntraMSCHDOs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3533};

# C.3.5.34 succIncomingExternalIntraMSCHDOs

succlncomingExternalIntraMSCHDOs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3534};

# C.3.5.35 attOutgoingExternalIntraMSCHDOs

attOutgoingExternalIntraMSCHDOs ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3535};

# C.3.5.36 succOutgoingExternalIntraMSCHDOs

succOutgoingExternalIntraMSCHDOs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour; **REGISTERED AS** {gsm1204attribute 3536};

## C.3.5.37 attIncomingInterMSCHDOs

attIncomingInterMSCHDOs ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3537};

## C.3.5.38 succIncomingInterMSCHDOs

succincomingInterMSCHDOs ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3538};

# C.3.5.39 attOutgoingInterMSCHDOs

attOutgoingInterMSCHDOs ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

general Measurement Attribute Behaviour;

**REGISTERED AS** {gsm1204attribute 3539};

# C.3.5.40 succOutgoingInterMSCHDOs

succOutgoingInterMSCHDOs ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3540};

# C.3.5.41 attSubsequentInterMSCHDOsMSCa

attSubsequentInterMSCHDOsMSCa ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3541};

# C.3.5.42 succSubsequentInterMSCHDOsMSCa

succSubsequentInterMSCHDOsMSCa ATTRIBUTE
WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3542};

## C.3.5.43 attSubsequentInterMSCHDOsMSCc

attSubsequentInterMSCHDOsMSCc ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3543};

## C.3.5.44 succSubsequentInterMSCHDOsMSCc

succSubsequentInterMSCHDOsMSCc ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3544};

## C.3.5.45 externalHDOs

externalHDOs ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3545};

## C.3.5.46 external HDOs Per Cause

externalHDOsPerCause ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType3;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3546};

## C.3.5.47 unsuccExternHDOsWithReconnectionPerMSC

unsuccExternHDOsWithReconnectionPerMSC ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3547};

## C.3.5.48 unsuccExternHDOsWithLossOfConnectionPerMSC

unsuccExternHDOsWithLossOfConnectionPerMSC ATTRIBUTE

### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3548};

## C.3.6 external HDO Measurement Function Related Attributes

## C.3.6.1 attIncomingExternalIntraMSCHDOsPerOriginatingCell

attIncomingExternalIntraMSCHDOsPerOriginatingCell ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 361};

## C.3.6.2 succIncomingExternalIntraMSCHDOsPerOriginatingCell

succIncomingExternalIntraMSCHDOsPerOriginatingCell ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 362};

## C.3.6.3 attOutgoingExternalIntraMSCHDOsPerTargetCell

attOutgoingExternalIntraMSCHDOsPerTargetCell ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 363};

# C.3.6.4 succOutgoingExternalIntraMSCHDOsPerTargetCell

succOutgoingExternalIntraMSCHDOsPerTargetCell ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 364};

# C.3.6.5 attIncomingInterMSCHDOsPerOriginatingCell

 $attIncomingInter MSCHDOs Per Originating Cell~{\bf ATTRIBUTE}$ 

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 365};

## C.3.6.6 succIncomingInterMSCHDOsPerOriginatingCell

succIncomingInterMSCHDOsPerOriginatingCell ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 366};

## C.3.6.7 attOutgoingInterMSCHDOsPerTargetCell

attOutgoingInterMSCHDOsPerTargetCell ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 367};

## C.3.6.8 succOutgoingInterMSCHDOsPerTargetCell

succOutgoingInterMSCHDOsPerTargetCell ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 368};

## C.3.7 HLR Measurement Function Related Attributes

## C.3.7.1 nbrOfCurrentMSsRoamingOutsideHPLMN

nbrOfCurrentMSsRoamingOutsideHPLMN ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 371};

# C.3.7.2 attReqForAuthSetsReceivedByHLRFromVLRs

attReqForAuthSetsReceivedByHLRFromVLRs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 372};

## C.3.7.3 succReturnedAuthSetsFromHLRToVLRs

succReturnedAuthSetsFromHLRToVLRs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 373};

## C.3.7.4 emptyResponsesForAuthSetsFromHLRToVLRs

emptyResponsesForAuthSetsFromHLRToVLRs ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 374};

## C.3.7.5 attInsertSubDataService

attInsertSubDataService ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 375};

## C.3.7.6 succlnsertSubDataService

succInsertSubDataService ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 376};

## C.3.7.7 attLocationUpdate

attLocationUpdate ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204 Type Module. GSM Measurement Type 1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 377};

## C.3.7.8 succLocationUpdate

succLocationUpdate ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 378};

## C.3.7.9 attSSRelatedOperationsInHLR

## attSSRelatedOperationsInHLR ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType5;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 379};

## C.3.7.10 succSSRelatedOperationsInHLR

## succSSRelatedOperationsInHLR ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType5;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3710};

# C.3.7.11 attReqForSMRoutingInfo

## attRegForSMRoutingInfo ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3711};

## C.3.7.12 succReqForSMRoutingInfo

### succRegForSMRoutingInfo ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3712};

# C.3.7.13 attSMDeliveryStatusReportProcs

## attSMDeliveryStatusReportProcs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3713};

# C.3.7.14 succSMDeliveryStatusReportProcs

## succSMDeliveryStatusReportProcs ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3714};

## C.3.7.15 attNbrOfSendAlerts

attNbrOfSendAlerts ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3715};

## C.3.7.16 succNbrOfSendAlerts

succNbrOfSendAlerts ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3716};

## C.3.7.17 attReqForMSRN

attReqForMSRN ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3717};

## C.3.7.18 succReqForMSRN

succReqForMSRN ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3718};

## C.3.8 VLR Measurement Function Related Attributes

## C.3.8.1 attMSMemoryAvailableNotifications

attMSMemoryAvailableNotifications ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 381};

## C.3.8.2 succMSMemoryAvailableNotifications

succMSMemoryAvailableNotifications ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 382};

## C.3.8.3 attIdentificationReqToPVLRs

attIdentificationReqToPVLRs ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 383};

## C.3.8.4 succIdentificationRegToPVLRs

succidentificationReqToPVLRs ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 384};

## C.3.8.5 attPageReqs

attPageReqs ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 385};

## C.3.8.6 succPageReqs

succPageReqs ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 386};

## C.3.8.7 attPageRegsPerLocationArea

attPageReqsPerLocationArea ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType6;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 387};

## C.3.8.8 succPageReqsPerLocationArea

succPageReqsPerLocationArea ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType6;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 388};

## C.3.8.9 attRegForAuthSetsSentToHLR

attRegForAuthSetsSentToHLR ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 389};

## C.3.8.10 succReceivedAuthSetsFromHLR

succReceivedAuthSetsFromHLR ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3810};

## C.3.8.11 emptyResponsesForAuthFromHLR

emptyResponsesForAuthFromHLR ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3811};

## C.3.8.12 attAuthProcsInVLR

attAuthProcsInVLR ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3812};

## C.3.8.13 succAuthProcsInVLR

succAuthProcsInVLR ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3813};

## C.3.8.14 attIntraVLRLocationUpdates

## attIntraVLRLocationUpdates ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3814};

## C.3.8.15 succIntraVLRLocationUpdates

## succIntraVLRLocationUpdates ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3815};

## C.3.8.16 attInterVLRLocationUpdates

## attInterVLRLocationUpdates ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3816};

## C.3.8.17 succInterVLRLocationUpdates

## succInterVLRLocationUpdates ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3817};

## C.3.8.18 arrivalOfVisitorsFromOtherPLMNs

## $arrival Of Visitors From Other PLMNs \ {\bf ATTRIBUTE}$

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3818};

## C.3.9 EIR Measurement Function Related Attributes

## C.3.9.1 nbrOfReceivedIMEICheckReqs

nbrOfReceivedIMEICheckReqs ATTRIBUTE
WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 391};

## C.3.9.2 nbrOfWhiteAnsInEIR

## nbrOfWhiteAnsInEIR ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 392};

## C.3.9.3 nbrOfGreyAnsInEIR

## nbrOfGreyAnsInEIR ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 393};

## C.3.9.4 nbrOfBlackAnsInEIR

#### nbrOfBlackAnsInEIR ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 394};

## C.3.9.5 nbrOfUnknownIMEIAnsInEIR

#### nbrOfUnknownIMEIAnsInEIR ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 395};

## C.3.10 SMS Measurement Function Related Attributes

## C.3.10.1 attMobileOriginatingSMForwardings

## attMobileOriginatingSMForwardings ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3101};

## C.3.10.2 succMobileOriginatingSMForwardings

succMobileOriginatingSMForwardings ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3102};

## C.3.10.3 attMobileTerminatingSMForwardings

attMobileTerminatingSMForwardings ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3103};

## C.3.10.4 succMobileTerminatingSMForwardings

succMobileTerminatingSMForwardings ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3104};

## C.3.10.5 attMobileTerminatingSMForwardingsSgsn

attMobileTerminatingSMForwardingsSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3104};

# C.3.10.6 succMobileTerminatingSMForwardingsSgsn

 $succ Mobile Terminating SMF orwardings Sgsn\ {\bf ATTRIBUTE}$ 

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3106};

## C.3.11 SGSN Measurement Function Related Attributes

## C.3.11.1 nbrLlcFramesSent

nbrLlcFramesSent ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour; **REGISTERED AS** {gsm1204attribute 3111};

## C.3.11.2 nbrllcFramesReceived

nbrllcFramesReceived ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour; **REGISTERED AS** {gsm1204attribute 3112};

## C.3.11.3 errLlcFramesDetectedBySgsn

errLlcFramesDetectedBySgsn ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3113};

## C.3.11.4 retransmittedLlcFramestoMs

retransmittedLlcFramestoMs ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3114};

## C.3.11.5 uplinkSndcpNpduReceived

uplinkSndcpNpduReceived ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3115};

## C.3.11.6 uplinkSndcpOctetReceivedMode

uplinkSndcpOctetReceivedMode ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3116};

## C.3.11.7 downlinkSndcpNpdusent

downlinkSndcpNpdusent ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3117};

## C.3.11.8 downlinkSndcpOctetSent

downlinkSndcpOctetSent ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3118};

## C.3.11.9 attGprsAttach

attGprsAttach ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3119};

## C.3.11.10 succGprsAttach

succGprsAttach ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31110};

## C.3.11.11 attCombiAttach

attCombiAttach ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31111};

## C.3.11.12 succCombiAttach

succCombiAttach ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31112};

## C.3.11.13 attlmsiAttach

attlmsiAttach ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31113};

## C.3.11.14 succlmsiAttach

succlmsiAttach ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31114};

## C.3.11.15 nbrOfAttachedSub

nbrOfAttachedSub ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31115};

## C.3.11.16 meanNbrOfAttachedSub

meanNbrOfAttachedSub ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31116};

## C.3.11.17 maxNbrOfAttachedSub

maxNbrOfAttachedSub ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31117};

## C.3.11.18 attGprsDetachMs

attGprsDetachMs ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31118};

## C.3.11.19 attCombiDetachMs

#### attCombiDetachMs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31119};

## C.3.11.20 attlmsiDetachMs

#### attlmsiDetachMs ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31120};

## C.3.11.21 attGprsdetachSgsn

## attGprsdetachSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31121};

# C.3.11.22 succGprsdetachSgsn

## succGprsdetachSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31122};

## C.3.11.23 attltraSgsnRaUpdate

## attltraSgsnRaUpdate ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31123};

# C.3.11.24 succIntraSgsnRaUpdate

## succIntraSgsnRaUpdate ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour; **REGISTERED AS** {gsm1204attribute 31124};

## C.3.11.25 attInterSgsnRaUpdate

attInterSgsnRaUpdate ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31125};

## C.3.11.26 succInterSgsnRaUpdate

succInterSgsnRaUpdate ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31126};

## C.3.11.27 attPTMSIRealloc

attPTMSIRealloc ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31127};

## C.3.11.28 succPTMSIrealloc

succPTMSIrealloc ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31128};

## C.3.11.29 attregAuthSetsSentToHlrBySgsn

attreqAuthSetsSentToHlrBySgsn ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31129};

## C.3.11.30 succReqAuthSetsHlr

SuccReqAuthSetsHlr ATTRIBUTE
WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31130};

## C.3.11.31 emptyResponsesForAuthSetsFromHlr

emptyResponsesForAuthSetsFromHlr ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31131};

## C.3.11.32 attAuthInSgsn

attAuthInSgsn ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31132};

## C.3.11.33 succAuthInSgsn

succAuthInSgsn ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31133};

## C.3.11.34 attIdentityReq

attldentityReq ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31134};

## C.3.11.35 succIdentityReq

succidentityReq ATTRIBUTE

WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31135};

## C.3.11.36 attCipheringModeControlPerSgsn

attCipheringModeControlPerSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31136};

## C.3.11.37 succCipheringModeControlPerSgsn

succCipheringModeControlPerSgsn ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 31138};

## C.3.11.38 nbrOfSubStandby

nbrOfSubStandby ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31138};

## C.3.11.39 meanNbrOfSubStandby

meanNbrOfSubStandby ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31139};

## C.3.11.40 maxNbrOfSubStandby

maxNbrOfSubStandby ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31140};

# C.3.11.41 nbrOfSubReady

nbrOfSubReady ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31141};

## C.3.11.42 meanNbrOfSubReady

## meanNbrOfSubReady ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31142};

## C.3.11.43 maxNbrOfSubReady

## maxNbrOfSubReady ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31143};

## C.3.11.44 nbrOfCheckIMEIRequests

## nbrOfCheckIMEIRequests ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31144};

## C.3.11.45 nbrOfWhiteAnswerInSgsn

## nbrOfWhiteAnswerInSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31145};

## C.3.11.46 nbrOfGreyAnswerInSgsn

## nbrOfGreyAnswerInSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31146};

## C.3.11.47 nbrOfBlackAnswerInSgsn

## nbrOfBlackAnswerInSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour;
REGISTERED AS {gsm1204attribute 31147};

## C.3.11.48 nbrOfUnknownAnswerInSgsn

nbrOfUnknownAnswerInSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31148};

## C.3.11.49 attPacketSwitchedPaging

attPacketSwitchedPaging ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31149};

## C.3.11.50 unsuccPacketSwitchedPaging

unsuccPacketSwitchedPaging ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31150};

## C.3.11.51 attPsPagingPerRoutingArea

attPsPagingPerRoutingArea ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType7;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31151};

## C.3.11.52 unsuccPsPagingPerRoutingArea

unsuccPsPagingPerRoutingArea ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType7;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31152};

## C.3.11.53 attActPdpContextMSPerSgsn

attActPdpContextMSPerSgsn ATTRIBUTE
WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31153};

## C.3.11.54 succActPdpContextMSPerSgsn

succActPdpContextMSPerSgsn ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31154};

## C.3.11.55 attActPdpContextDynMSPerSgsn

attActPdpContextDynMSPerSgsn ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31155};

## C.3.11.56 succActPdpContextDynMSPerSgsn

succActPdpContextDynMSPerSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31156};

## C.3.11.57 attDeactPdpContextMsPerSgsn

attDeactPdpContextMsPerSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31157};

## C.3.11.58 succDeactPdpContextMsPerSgsn

succDeactPdpContextMsPerSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31158};

## C.3.11.59 attDeactPdpContextGgsnPerSgsn

attDeactPdpContextGgsnPerSgsn ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31159};

## C.3.11.60 succDeactPdpContextGgsnPerSgsn

succDeactPdpContextGgsnPerSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31160};

## C.3.11.61 nbrSubsWithActivePdpInSgsn

nbrSubsWithActivePdpInSgsn ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31161};

## C.3.11.62 meanSubsWithActivePdpInSgsn

meanSubsWithActivePdpInSgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31162};

## C.3.11.63 nmaxSubsWithActivePdpInSgsn

nmaxSubsWithActivePdpInSgsn ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 31163};

## C.3.12 GGSN Measurement Function Related Attributes

## C.3.12.1 attActPdpContextPerApnOfGgsn

attActPdpContextPerApnOfGgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType8;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3121};

## C.3.12.2 succActPdpContextPerApnOfGgsn

succActPdpContextPerApnOfGgsn ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType8;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3122};

## C.3.12.3 attActPdpContextDnyPerApnOfGgsn

attActPdpContextDnyPerApnOfGgsn ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType8;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3123};

## C.3.12.4 succActPdpContextDnyPerApnOfGgsn

 $succActPdpContextDnyPerApnOfGgsn\ {\bf ATTRIBUTE}$ 

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType8;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3124};

# C.3.12.5 attDeactPdpContextMsPerApnOfGgsn

attDeactPdpContextMsPerApnOfGgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType8;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3125};

# C.3.12.6 succDeactPdpContextMsPerApnOfGgsn

succDeactPdpContextMsPerApnOfGgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType8;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

**REGISTERED AS** {gsm1204attribute 3126};

# C.3.12.7 attDeactPdpContextByGgsnPerApn

attDeactPdpContextByGgsnPerApn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType8;

**BEHAVIOUR** 

generalMeasurementAttributeBehaviour; **REGISTERED AS** {gsm1204attribute 3127};

## C.3.12.8 succDeactPdpContextByGgsnMsPerApn

succDeactPdpContextByGgsnMsPerApn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType8;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 3128};

## C.3.12.9 nbrOfActivePdpContextsPerApnAtGgsn

nbrOfActivePdpContextsPerApnAtGgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType1;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 3129};

## C.3.12.10 meanNbrOfActivePdpContextsPerApnAtGgsn

meanNbrOfActivePdpContextsPerApnAtGgsn ATTRIBUTE

#### WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType8;

#### **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 31210};

# C.3.12.11 maxNbrOfActivePdpContextsPerApnAtGgsn

maxNbrOfActivePdpContextsPerApnAtGgsn ATTRIBUTE

## WITH ATTRIBUTE SYNTAX

GSM1204TypeModule.GSMMeasurementType8;

## **BEHAVIOUR**

generalMeasurementAttributeBehaviour;

REGISTERED AS {gsm1204attribute 31211};

# C.4 Name Bindings

# C.4.1 BSS Name Binding

## C.4.1.1 simpleScanner-bssFunction

simpleScanner-bssFunction NAME BINDING

SUBORDINATE OBJECT CLASS "Recommendation X.738: 1993": simpleScanner;

NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": bssFunction;

WITH ATTRIBUTE scannerld;

CREATE;

DELETE;

**REGISTERED AS** {gsm1204nameBinding 411};

# C.4.2 BSC Name Binding

## C.4.2.1 bscMeasurementFunction-bsc

bscMeasurementFunction-bsc NAME BINDING

**SUBORDINATE OBJECT CLASS** bscMeasurementFunction;

NAMED BY SUPERIOR OBJECT CLASS "gsm1220: 1993": bsc;

WITH ATTRIBUTE measurementFunctionId;

CREATE;

DELETE;

**REGISTERED AS** {gsm1204nameBinding 421};

# C.4.3 BTS Name Binding

## C.4.3.1 cellMeasurementFunction-bts

cellMeasurementFunction-bts NAME BINDING

**SUBORDINATE OBJECT CLASS** cellMeasurementFunction;

NAMED BY SUPERIOR OBJECT CLASS "gsm1220: 1993": bts;

WITH ATTRIBUTE measurementFunctionId;

CREATE;

DELETE;

**REGISTERED AS** {gsm1204nameBinding 431};

## C.4.3.2 internalHdoMeasurementFunction-bts

internalHdoMeasurementFunction-bts NAME BINDING

**SUBORDINATE OBJECT CLASS** internalHdoMeasurementFunction;

NAMED BY SUPERIOR OBJECT CLASS "gsm1220: 1993": bts;

WITH ATTRIBUTE measurementFunctionId;

CREATE;

**DELETE**;

**REGISTERED AS** {gsm1204nameBinding 432};

# C.4.4 MSC Name Binding

## C.4.4.1 mscMeasurementFunction-mscFunction

mscMeasurementFunction-mscFunction NAME BINDING
SUBORDINATE OBJECT CLASS mscMeasurementFunction;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": mscFunction;
WITH ATTRIBUTE measurementFunctionId;
CREATE;
DELETE;

**REGISTERED AS** {gsm1204nameBinding 441};

## C.4.4.2 externalHdoMeasurementFunction-mscFunction

externalHdoMeasurementFunction-mscFunction NAME BINDING
SUBORDINATE OBJECT CLASS externalHdoMeasurementFunction;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": mscFunction;
WITH ATTRIBUTE measurementFunctionId;
CREATE;
DELETE;
REGISTERED AS {gsm1204nameBinding 442};

## C.4.4.3 simpleScanner-mscFunction

simpleScanner mscFunction-NAME BINDING
SUBORDINATE OBJECT CLASS "Recommendation X.738: 1993": simpleScanner;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": mscFunction;
WITH ATTRIBUTE scannerId;
CREATE;
DELETE;
REGISTERED AS {gsm1204nameBinding 443};

# C.4.5 HLR Name Binding

## C.4.5.1 hlrMeasurementFunction-hlrFunction

hlrMeasurementFunction-hlrFunction NAME BINDING
SUBORDINATE OBJECT CLASS hlrMeasurementFunction;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": hlrFunction;
WITH ATTRIBUTE measurementFunctionId;
CREATE;
DELETE;
REGISTERED AS {gsm1204nameBinding 451};

## C.4.5.2 simpleScanner-hlrFunction

simpleScanner-hlrFunction NAME BINDING
SUBORDINATE OBJECT CLASS "Recommendation X.738: 1993": simpleScanner;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": hlrFunction;
WITH ATTRIBUTE scannerld;
CREATE;
DELETE;

**REGISTERED AS** {gsm1204nameBinding 452};

# C.4.6 VLR Name Binding

## C.4.6.1 vlrMeasurementFunction-vlrFunction

vlrMeasurementFunction-vlrFunction NAME BINDING
SUBORDINATE OBJECT CLASS vlrMeasurementFunction;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": vlrFunction;
WITH ATTRIBUTE measurementFunctionId;
CREATE;
DELETE;

C.4.6.2 simpleScanner-vlrFunction

C.4.7 EIR Name Binding

**REGISTERED AS** {gsm1204nameBinding 461};

```
simpleScanner-vlrFunction NAME BINDING
SUBORDINATE OBJECT CLASS "Recommendation X.738: 1993": simpleScanner;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": vlrFunction;
WITH ATTRIBUTE scannerld;
CREATE;
DELETE;
REGISTERED AS {gsm1204nameBinding 462};
```

## C.4.7.1 eirMeasurementFunction-eirFunction

eirMeasurementFunction-eirFunction NAME BINDING

```
SUBORDINATE OBJECT CLASS eirMeasurementFunction;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": eirFunction;
WITH ATTRIBUTE measurementFunctionId;
CREATE;
DELETE;
```

# **REGISTERED AS** {gsm1204nameBinding 471};

## C.4.7.2 simpleScanner-eirFunction

simpleScanner-eirFunction NAME BINDING

SUBORDINATE OBJECT CLASS "Recommendation X.738: 1993": simpleScanner; NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": eirFunction; WITH ATTRIBUTE scannerld; CREATE; DELETE;

# **REGISTERED AS** {gsm1204nameBinding 472};

# C.4.8 SMS Name Binding

## C.4.8.1 smsMeasurementFunction-smsGIWFunction

smsMeasurementFunction-smsGIWFunction NAME BINDING
SUBORDINATE OBJECT CLASS smsMeasurementFunction;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": smsGIWFunction;
WITH ATTRIBUTE measurementFunctionId;
CREATE;
DELETE;
REGISTERED AS {gsm1204nameBinding 481};

## C.4.8.2 simpleScanner-smsGIWFunction

simpleScanner-smsGIWFunction NAME BINDING
SUBORDINATE OBJECT CLASS "Recommendation X.738: 1993": simpleScanner;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": smsGIWFunction;
WITH ATTRIBUTE scannerId;
CREATE;
DELETE;
REGISTERED AS {gsm1204nameBinding 482};

# C.4.9 SGSN Name Binding

Enter sgsn Name binding to network element function

# C.4.9.1 sgsnMeasurementFunction-sgsnFunction

sgsnMeasurementFunction-sgsnFunction NAME BINDING
SUBORDINATE OBJECT CLASS sgsnMeasurementFunction;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": sgsnFunction;
WITH ATTRIBUTE measurementFunctionId;
CREATE;
DELETE;
REGISTERED AS {gsm1204nameBinding 491};

# C.4.9.2 simpleScanner-sgsnFunction

simpleScanner-sgsnFunction NAME BINDING
SUBORDINATE OBJECT CLASS "Recommendation X.738: 1993": simpleScanner;
NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": sgsnFunction;

WITH ATTRIBUTE scannerld;

CREATE;

**DELETE**;

REGISTERED AS {gsm1204nameBinding 492};

# C.4.10 GGSN Name Binding

Enter ggsn Name binding to network element function

## C.4.10.1 ggsnMeasurementFunction-vlrFunction

ggsnMeasurementFunction-ggsnFunction NAME BINDING

**SUBORDINATE OBJECT CLASS** ggsnMeasurementFunction;

NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": vlrFunction;

WITH ATTRIBUTE measurementFunctionId;

CREATE;

**DELETE**;

**REGISTERED AS** {gsm1204nameBinding 4101};

## C.4.10.2 simpleScanner-ggsnFunction

simpleScanner-ggsnFunction NAME BINDING

SUBORDINATE OBJECT CLASS "Recommendation X.738: 1993": simpleScanner;

NAMED BY SUPERIOR OBJECT CLASS "gsm1200: 1993": ggsnFunction;

WITH ATTRIBUTE scannerld;

CREATE;

**DELETE**;

**REGISTERED AS** {gsm1204nameBinding 4102};

# C.5 Behaviour Definitions

# C.5.1 simple scanner behaviour

The behaviour of the simple scanner is defined in [ISO 10164-13] clause 8.1.1.3.

# C.5.2 general measurement function behaviour

generalMeasurementFunctionBehaviour BEHAVIOUR

#### **DEFINED AS**

"This object is defined to contain the various optional measurement packages, and one or more instances of this class may exist in the scope of the containing object. The scanner may scan the attributes of the object class in various combinations and permutations of packages, and further may scan simultaneously as many times as necessary within the processing limits of the network."

C.5.3 general measurement package behaviour

generalMeasurementPackageBehaviour BEHAVIOUR

#### **DEFINED AS**

"Measurement packages are present in the Measurement Function Object (e.g. BSC Measurement Function), if the Network Element Function (e.g. BSC) containing the Measurement Function Object supports the required number of instances of the measurement included in the package according to the number of instances of the Measurement Function. The simple scanner has been designed to read the values of the attributes according to a given schedule."

C.5.4 general measurement attribute behaviour

generalMeasurementAttributeBehaviour BEHAVIOUR

## **DEFINED AS**

"The measurement that corresponds to this attribute, is described in annex B. The name of this attribute is given in the description part (D) of each measurement definition contained in annex B."

NOTE: To enable this attribute to be easily located, an index of these attributes is listed at the end of the present document.

ETSI

# C.6 Abstract syntax definitions

This clause contains the ASN.1 module defining the attribute, Action and notification syntax's referenced by the attribute, Action and notification templates.

```
GSM1204TypeModule{
    ITU-T (0) identified-organization (4) etsi (0) mobileDomain (0)
    qsm-Operation-Maintenance (3)
    gsm-12-04 (4) informationModel (0) asn1Module (2)
    asn1TypeModule (0) }
DEFINITIONS IMPLICIT TAGS ::=
BEGIN
    asm-12-04
    FROM GSM-DomainDefinitions {
    ITU-T (0) identified-organisation (4) etsi (0) mobileDomain (0)
    gsm-Operation-Maintenance (3) gsm-12-30 (30) informationModel (0)
    asn1Module (2) gsm-OM-DomainDefinitions (0) version1 (1) }
-- Object Identifiers.
-- Abstract Syntax
gsm1204abstractSyntax OBJECT IDENTIFIER ::= {gsm-12-04 protocolSupport (1) abstractSyntax (1)}
-- Information Model Related Identifiers
gsm1204informationModel OBJECT IDENTIFIER ::= {gsm-12-04 informationModel (0)}
gsm1204managedObjectClass OBJECT IDENTIFIER ::= {gsm1204informationModel managedObjectClass (3)}
gsm1204package OBJECT IDENTIFIER ::= {gsm1204informationModel package (4)}
gsm1204nameBinding OBJECT IDENTIFIER ::= {gsm1204informationModel nameBinding (6)} gsm1204attribute OBJECT IDENTIFIER ::= {gsm1204informationModel attribute (7)}
-- Application Contexts
gsm1204ApplicationContext OBJECT IDENTIFIER ::= {gsm-12-04 protocolSupport (1) applicationContext
(0) gsm-Management (0)}
-- The following measurement types are defined.
GSMMeasurementType1 ::= INTEGER
GSMMeasurementType2 ::= REAL
GSMMeasurementType3 ::= SET OF SEQUENCE{
    cause
           Cause,
           INTEGER }
    value
    Cause ::= INTEGER{
-- CM_SERVICE REJECT causes (GSM 04.08 [2]):
    imsiUnknownInHlr
                         (1),
    illegalMs (2),
    imsiUnknownInVlr
                         (3),
    imeiNotAccepted ( 4),
    illegalMe (5),
    plmnNotAllowed (6),
    locationAreaNotAllowed (7),
    nationalRoamingNotAllowedInLocationArea ( 8),
    networkFailure (9),
    congestion (10),
    serviceOptionNotSupported (11),
    requestedServiceOptionNotSubscribed (12),
    serviceOptionTemporarilyOutOfOrder (13),
    callCannotBeIdentified (14),
    {\tt semanticallyIncorrectMessage}
    invalidMandatoryInformation (16),
    messageTypeNonExistentOrNotImplemented (17),
    messageTypeNotCompatibleWithProtocolState (18),
    informationElementNonExistentOrNotImplemented
    conditionalIeError (20)
```

```
messageNotCompatibleWithProtocolState (21),
    protocolError (22),
    reservedRejectCause (23),
-- Internal and external Handover causes (GSM 08.08 [5]):
    uplinkQuality (24),
uplinkStrength (25),
    downlinkQuality (26),
    downlinkStrenght
    distance (28),
betterCell (29),
    operationAndMaintenanceIntervention (30),
    directedRetry (31),
    -- valid for external handovers only:
    responseToMscInvocation (32),
-- Immediate assignment procedure causes (GSM 04.08 [2]):
    emergencyCall
                    (33),
    callReEstablishment (34),
    answerToPaging (35),
originatingCall (36),
    locationUpdating (37),
otherProcedures (38),
    reservedEstablishmentCause (39) }
-- Interference band definitions (GSM 04.08 [2]):
GSMMeasurementType4 ::= SEQUENCE{
    channelsPerInterferenceBand1
                                       REAL,
    channelsPerInterferenceBand2
                                       REAL,
    channelsPerInterferenceBand3
                                       REAL,
                                      REAL,
    channelsPerInterferenceBand4
    channelsPerInterferenceBand5
                                      REAL }
GSMMeasurementType5 ::= SET OF SEQUENCE{
    ssOperation SSOperation,
    value INTEGER
-- SS operation definitions (GSM 09.02 [7]):
    SSOperation ::= INTEGER{
    register
                (0),
    erase (1),
    activate (2),
deactivate (3),
    registerPassword
                         (4),
    interrogateSSOperation (5),
    processRequest (6) }
{\tt GSMMeasurementType6} \ ::= \ {\tt SET} \ {\tt OF} \ {\tt SEQUENCE} \{
   locationAreaCode
                         LAC,
    value INTEGER }
LAC ::= INTEGER (0..65535)
GSMMeasurement Function Id
                            ··= INTEGER
GSMCellName ::= SEQUENCE{
    cellid INTEGER(0..65535),
    locatioAreaCode LAC }
GSMMeasurementType7 ::= SET OF SEQUENCE{
    routingAreaCode RAC,
    value INTEGER }
RAC ::= INTEGER (0..255)
GSMMeasurementType8 ::= SET OF SEQUENCE{
    AccessPoint NameLogicalLinkID
                     INTEGER }
```

APNID ::= INTEGER (0..65535)

NOTE: The APN Logical Link ID, is a numeric value for the assigned to each APN link in the GGSN. The ID is only unique when presented together with the GGSN address.

END

# Annex D (normative): Data Transfer Requirements

This annex defines the data transfer requirements from the NE to the OS for the present document. The present document makes use of the generic approach to EFD, Log and File transfer facility as defined in GSM 12.00 [8].

# D.1 Data Transfer Requirements

## D.1.1 General

The GSM 12.04 defines how statistical information concerning various aspects of the NE's can be collected. Once this data is collected and available in the NE, it shall be possible to transfer it to the OS. The way in which this can be achieved is described in GSM 12.00 [8].

GSM 12.00 [8] describes the generic solutions to data transfer requirements which are used by GSM 12.04. This annex describes the additional information required to fully satisfy the data transfer requirements of GSM 12.04, containment of which is described in annex C.

Of the data transfer functions described in GSM 12.00 [8], GSM 12.04 requires the upload function, i.e. OS controlled data transfer from NE to OS.

# D.2 Object Model

# D.2.1 Managed Object Classes

## D.2.1.1 "Recommendation X.721: 1992": log

Object instances of this class are used to store incoming event reports. An instance of this class can be created to store specifically scan report notifications (in form of "scanReportRecords" managed objects). This is achieved by using the discriminator construct and filtering on the event type information.

# D.2.1.2 "Recommendation X.738: 1993": scanReportRecord

Objects of this class are used to represent logged information that resulted from Attribute Value Change Notifications and are contained in a 'log' instance.

# D.2.2 Name Bindings

## D.2.2.1 log-managedElement

log-managedElement NAME BINDING

SUBORDINATE OBJECT CLASS "Recommendation X.721: 1992": log;

NAMED BY SUPERIOR OBJECT CLASS "Recommendation M.3100: 1992": managedElement;

WITH ATTRIBUTE "Recommendation X.721: 1992": logId;

CREATE:

DELETE;

**REGISTERED AS** { gsm1204NameBinding 221 };

## D.2.2.2 scanReportRecord-log

scanReportRecord-log NAME BINDING

SUBORDINATE OBJECT CLASS "Recommendation X.738: 1993": scanReportRecord;

NAMED BY SUPERIOR OBJECT CLASS "Recommendation X.721: 1992": log;

WITH ATTRIBUTE "Recommendation X.721: 1992": logRecordId;

DELETE;

**REGISTERED AS** { gsm1204NameBinding 222 };

# Annex E (informative):

# Non Standardised Measurements of Interest to PLMN Management

Following is the template used to describe the measurements contained in this annex.

#### A. Description

- A short explanation of the measurement operation.

#### B. Collection Method

- The form in which this measurement data is obtained:
  - **CC** (Cumulative Counter).
  - GAUGE (dynamic variable), used when data being measured can vary up or down during the period of measurement.
  - **DER** (Discrete Event Registration), when data related to a particular event are captured every nth event is registered, where n can be 1 or larger.
  - **SI** (Status Inspection).

## Inception of annex E

The annex E has been created to contain all the measurements that are **NOT** candidates for standardisation, (indication that they have been considered).

At the end of the annex there are also references to the Fixed Network measurements, which have been included for completeness.

NOTE: The measurements in this annex are for information only and as a consequence are **NOT** included in the Object Model (annex C).

# E.1 Measurement Related to the BSC

## E.1.1 BSC Measurement Function

None.

# E.2 Measurement Related to the BTS

## E.2.1 BTS Measurement Function

None.

## E.2.2 CELL Measurement Function

None.

## E.2.3 Internal HDO Measurement Function

None.

# E.3 Measurement Related to the MSC

## E.3.1 MSC Measurement Function

## E.3.1.1 Attempted Mobile to Mobile Calls

- A. This measurement provides the number of mobile to mobile call attempts received by the MSC.
- B. CC.

## E.3.1.2 Successful Mobile to Mobile Calls

- A. This measurement provides the number of successful mobile to mobile calls.
- B. CC.

## E.3.1.3 Answered Mobile to Mobile Calls

- A. This measurement counts the number of answered mobile to mobile calls.
- B. CC.

## E.3.1.4 Attempted Mobile to Land Calls

- A. This measurement provides the number of mobile to land call attempts received by the MSC.
- B. CC.

## E.3.1.5 Successful Mobile to Land Calls

- A. This measurement provides the number of successful mobile to land calls.
- B. CC.

## E.3.1.6 Answered Mobile to Land Calls

- A. This measurement provides the number of answered mobile to land calls.
- B. CC.

# E.3.1.7 Attempted Land to Mobile Calls

- A. This measurement provides the number of land to mobile call attempts received by the MSC.
- B. CC.

## E.3.1.8 Successful Land to Mobile Calls

- A. This measurement provides the number of successful land to mobile calls.
- B. CC.

## E.3.1.9 Answered Land to Mobile Calls

- A. This measurement indicates the number of answered land to mobile calls.
- B. CC.

## E.3.1.10 Mean Holding Time of Calls

- A. This measurement provides the mean holding time of calls.
- B. CC.

## E.3.2 External HDO Measurement Function

None.

# E.4 Measurements related to the HLR

## E.4.1 HLR Measurement Function

## E.4.1.1 Instantaneous number of HLR subscribers

- A. This measurement provides a running total of the number of subscribers for whom information is currently held the HLR.
- B. SI.

## E 4.1.2 Barred subscribers in the HLR

- A. This measurement provides the number of barred subscribers in the HLR.
- B. SI.

## E.4.1.3 Bearer service indication

- A. This measurement provides the number of subscribers with the specified bearer service.
- B. CC.

## E.4.1.4 SS operation indication

- A. This measurement provides the number of subscribers with the specified SS operation.
- B. CC.

# E.4.1.5 Attempted requests for Authentication sets from the AUC by the HLR

- A. This measurement counts the number of triplets requested from the AUC by the HLR.
- B. CC.

## E.4.1.6 Successful returned Authentication sets from the AUC to the HLR

- A. This measurement counts the successfully returned triplets from the AUC to the HLR.
- B. CC.

# E.5 Measurements related to the VLR

## E.5.1 VLR Measurement Function

## E.5.1.1 Subscribers from other PLMNs registered in the VLR

- A. This measurement provides the number of subscribers of other PLMNs registered in the VLR.
- B. SI.

## E.5.1.2 Number of roamers in the VLR

- A. This measurement provides the number of roamers which are registered in the VLR.
- B. SI.

# E.6 Measurements related to the EIR

None.

# E.7 Measurements related to the SMS-IWMSC/GMSC

None.

# E.8 Performance Measurements on non-specific GSM Objects

# E.8.1 Measurements related to a PCM system

According to ITU-T Recommendation Q.79x.

## E.8.2 Measurements related to MTP

According to ITU-T Recommendation Q.79x.

# E.8.3 Measurements related to SCCP and TCAP

According to ITU-T Recommendation Q.79x.

## E.8.4 Measurements related to ISUP

According to ITU-T Recommendation Q.79x.

# E.8.5 Measurements related to Internet Protocols

According to IETF RFC Recommendations.

# Annex F (informative): Index of Measurement Attribute Names

The measurement description (part D of annex B) provides for each measurement the equivalent measurement attribute name. This clause provides an index of all the attribute names which are used in annex B. This index is provided to enable the reader to forward or backward reference, these attributes in annex C.

## Measurement Attribute Name: Page

allAvailableSDCCHAllocatedTime,	44
allAvailableTCHAllocatedTime,	42
ansMobileEmergencyCalls,	56
ansMobileOriginatingCalls,	54
ansMobileTerminatingCalls,	55
arrivalOfVisitorsFromOtherPLMNs,	78
attAuthProcsInVLR,	77
attCipheringModeControlProcs,	56
attIdentificationReqToPVLRs,	74
attImmediateAssingProcs,	38
attImmediateAssingProcsPerBSC,	34
attImmediateAssingProcsPerCause,	38, 51
attIncomingExternalIntraMSCHDOs,	62
attIncomingExternalIntraMSCHDOsPerOriginatingCell,	67
attIncomingInterMSCHDOs,	63
attIncomingInterMSCHDOsPerOriginatingCell,	68
attIncomingInternalInterCellHDOs,	46
attIncomingInternalInterCellHDOsPerOriginatingCell,	52
attInsertSubDataService,	70
attInterrogationOfHLRsForRouting,	57
attInterVLRLocationUpdates,	78
attIntraVLRLocationUpdates,	77
attLocationUpdate,	71
attMobileEmergencyCalls,	55
attMobileOriginatingCalls,	54
attMobileOriginatingSMForwardings,	80
attMobileTerminatingCalls,	55

attMobileTerminatingSMForwardings,	81
attMSMemoryAvailableNotifications,	74
attNbrOfSendAlerts,	73
attOpForMobileOriginatingPointToPointSMs,	58
attOpForMobileTerminatingPointToPointSMs,	58
attOutgoingExternalIntraMSCHDOs,	63
attOutgoingExternalIntraMSCHDOsPerTargetCell,	67
attOutgoingInterMSCHDOs,	64
attOutgoingInterMSCHDOsPerTargetCell,	68
attOutgoingInternalInterCellHDOs,	46
attOutgoingInternalInterCellHDOsPerTargetCell,	
attPageReqs,	75
attPageReqsPerLocationArea,	75
attReqForAuthSetsReceivedByHLR,	69
attReqForAuthSetsSentToHLR,	
attReqForMSRN,	
attReqForSMRoutingInfo,	72
attSDCCHSeizuresMeetingSDCCHBlockedState,	44
attSMDeliveryStatusReportProcs,	72
attSSRelatedOperationsInHLR,	
attSubsequentInterMSCHDOsMSCa,	65
attSubsequentInterMSCHDOsMSCc,	
attTCHSeizures,	41
attTCHSeizuresMeetingTCHBlockedState,	41
attTransOfPagingMessagesPerBSC,	33
attTransOfPagingMessagesThePCH,	37, 50
emptyResponsesForAuthFromHLR,	77
emptyResponsesForAuthSetsFromHLR,	70
externalHDOs,	66
externalHDOsPerCause,	66
imsiAttachProcs,	62
imsiDetachProcs,	62
maxNbrOfBusySDCCHs,	43
maxNbrOfBusyTCHs,	40, 49
meanDurationOfSuccPagingProcs,	39

meanInterArrivalTime,	33, 37
meanNbrOfBusySDCCHs,	43
meanNbrOfBusyTCHs,	40, 49
meanNbrOfIdleTCHsPerInterferenceBand,	41
meanPCHAGCHQueueLength,	37, 50
meanSDCCHQueueLength,	44
meanTCHBusyTime,	42
meanTCHQueueLength,	42
meanTimeToCallSetupService,	60
meanTimeToLocationUpdateService,	60
nbrOfAvailableSDCCHs,	43
nbrOfAvailableTCHs,	40
nbrOfBlackAnsInEIR,	80
nbrOfBlackAnsInMSC,	59
nbrOfClassMarkUpdates,	54
nbrOfCurrentMSsRoamingOutsideHPLMN,	69
nbrOfGreyAnsInEIR,	79
nbrOfGreyAnsInMSC,	59
nbrOfLostRadioLinksSDCCH,	45
nbrOfLostRadioLinksTCH,	43
nbrOfPagesDiscardedFromPCHQueue,	39, 50
nbrOfReceivedIMEICheckReqs,	79
nbrOfTransCheckIMEIRequests,	59
nbrOfUnknownIMEIAnsInEIR,	80
nbrOfUnknownIMEIAnsInMSC,	60
nbrOfWhiteAnsInEIR,	79
nbrOfWhiteAnsInMSC,	59
relativeTimeDLPowerControlAtMax,	45
relativeTimeULPowerControlAtMax,	45
succAuthProcsInVLR,	77
succCipheringModeControlProcs,	57
succIdentificationReqToPVLRs,	75
succImmediateAssingProcsPerBSC,	34
succImmediateAssingProcsPerCause,	39, 51
succIncomingExternalIntraMSCHDOs,	63

succIncoming External IntraMSCHDOs Per Originating Cell,	67
succIncomingInterMSCHDOs,	64
succIncomingInterMSCHDOsPerOriginatingCell,	68
succIncomingInternalInterCellHDOs,	46
succIncomingInternalInterCellHDOsPerOriginatingCell,	53
succInsertSubDataService,	70
succInternalHDOsIntraCell,	45
succInternalHDOsIntraCellPerBSC,	34
succInternalHDOsPerBSC,	35
succInternalHDOsPerCause,	35
succInterrogationOfHLRsCallForwarding,	57
succInterrogationOfHLRsMSRNObtained,	57
succInterVLRLocationUpdates,	78
succIntraVLRLocationUpdates,	78
succLocationUpdate,	71
succMobileEmergencyCalls,	56
succMobileOriginatingCalls,	54
succMobileOriginatingSMForwardings,	81
succMobileTerminatingCalls,	55
succMobileTerminatingSMForwardings,	81
succMSMemoryAvailableNotifications,	74
succNbrOfSendAlerts,	73
succOpForMobileOriginatingPointToPointSMs,	58
succOpForMobileTerminatingPointToPointSMs,	58
succOutgoingExternalIntraMSCHDOs,	63
succOutgoing External IntraMSCHDOs Per Target Cell,	68
succOutgoingInterMSCHDOs,	64
succOutgoingInterMSCHDOsPerTargetCell,	69
succOutgoingInternalInterCellHDOs,	47
succOutgoing Internal InterCellHDOs PerTargetCell,	53
succPageReqs,	75
succPageReqsPerLocationArea,	76
succReceivedAuthSetsFromHLR,	76
succReqForMSRN,	74
succReqForSMRoutingInfo,	72

succReturnedAuthSetsFromHLR,	70
succSMDeliveryStatusReportProcs,	73
succSSRelatedOperationsInHLR,	71
succSubsequentInterMSCHDOsMSCa,	65
succSubsequentInterMSCHDOsMSCc,	65
succTCHSeizures,	41, 51
succTMSIReallocations,	62
transSubIdentifiedWithIMSI,	61
transSubIdentifiedWithTMSI,	61
unsuccExternHDOsWithLossOfConnectionPerMSC,	66
unsuccExternHDOsWithReconnectionPerMSC,	66
unsuccHDOsWithLossOfConnection,	47
unsuccHDOsWithReconnection,	47
unsuccInternalHDOsIntraCell,	46
unsuccInternalHDOsIntraCellPerBSC,	35
unsuccInternalHDOsWithLossOfConnectionPerBSC,	36
unsuccInternalHDOsWithReconnectionPerBSC,	36
unsuccReqsForService,	33
unsuccReqsForServicePerCause,	33
unsuccTransOfPagingMessagesPerBSC,	34
unsuccTransOfPagingMessagesThePCH,	38

# Annex G (informative): Bibliography

This clause provides references to documents which are not directly referenced by the present document, but nevertheless are useful for back ground information on this subject.

- ITU-T Recommendations E.500: "Traffic intensity measurement principles".
- ITU-T Recommendation E.600: "Terms and definitions of traffic engineering".
- ITU-T Recommendation M.3010: "Principles for a Telecommunications management network".
- ITU-T Recommendation M.3200: "TMN management services and telecommunications managed areas: overview".
- ITU-T Recommendation M.3400: "TMN Management Functions".
- ITU-T Recommendation M.251: "Maintenance Functions to Be Implemented in ITU-T-MML General Maintenance Principles Maintenance of International Transmission Systems and Telephone Circuits (Study Group IV) 29 pp".
- ITU-T Recommendation Q.542: "Digital exchange design objectives Operations and maintenance".
- ITU-T Recommendation Q.544: "Digital exchange measurements".
- ITU-T Recommendation Q.822: "Stage 1, stage 2 and stage 3 description for the Q3 interface Performance management".
- ITU-T Recommendation Z.336: "Traffic measurement administration".

# Annex H (informative): Change history

	Change history							
Date	TSG#	TSG Doc.	CR	Rev	Subject/Comment	Cat	Old	New
Jun 2001	SA_12	010237			Submitted as to TSG SA #12 for Information (this part maintains the relevant clauses of GSM 12.04 for the future in 3GP)		1.0.0	
Sep 2001	SA_13	SP- 010467			Submitted to TSG SA #13 for Approval. TS# changed from 32.402 to 52.402 as being GSM-only.		2.0.0	4.0.0
Jun 2002	SA_16	SP- 020292	0001		Correction of erroneous definitions of SGSN measurements	А	4.0.0	4.1.0
Jun 2002	SA_16	SP- 020293	0002		Remove irrelevant definitions for SGSN measurements related to Ciphering Mode	А	4.0.0	4.1.0
Mar 2003	SA_19	SP- 030040			Request approved for Automatic upgrade to Rel-5 (i.e. no CR)		4.1.0	5.0.0
Sep 2004	SA_25	040541			Automatic upgrade to Rel- 6 (no CR) as per request in SP-040541 SA5_presentation_SA_25.ppt (slide 17)		5.0.0	6.0.0
Dec 2005	SA_30	SP- 050705	0003		Correct counter name nbrOfGreyAnswerInSgsn	F	6.0.0	6.1.0
Jun 2007	SA_36				Automatic upgrade to Rel-7 (no CR) at freeze of Rel-7. Reference [32] 3GPP TS 32.403 was "Voided". Reason: discontinued from Rel-6 onwards and the material was used in a set of new Rel-7 specifications - see [33]. Introduction updated accordingly.		6.1.0	7.0.0
Dec 2007	SA_38	SP- 070741	0004		Add measurements related to number of octets of uplink and downlink BSSGP PDU	В	7.0.0	8.0.0
Dec 2007	SA_38	SP- 070741	0005		Add measurements related to mean number of PDCH for GPRS and EGPRS	В	7.0.0	8.0.0
Dec 2007	SA_38	SP- 070741	0006		Add measurements related to mean number of GPRS and EGPRS TBF for downlink	В	7.0.0	8.0.0
Dec 2007	SA_38	SP- 070741	0007		Add measurements related to throughput of EGPRS RLC layer	В	7.0.0	8.0.0
Dec 2009	-	-	-	-	Update to Rel-9 version		8.0.0	9.0.0
2011-03	-	-	-	-	Update to Rel-10 version (MCC)		9.0.0	10.0.0
2012-09	-	-	-	-	-	Update to Rel-11 version (MCC)	10.0.0	11.0.0

# History

Document history				
V11.0.0	November 2012	Publication		