


MOTOR SIZES

2A
120/60/50 V GFI
3-PRONG (GROUND) CONNECTION REQUIRED

NOTE: SHARING A POWER SOURCE WITH OTHER DEVICES MAY CAUSE A DROP IN PERFORMANCE. FOR BEST RESULTS DO NOT RUN ANY OTHER HIGH POWERED EQUIPMENT FROM THE SAME SOURCE.

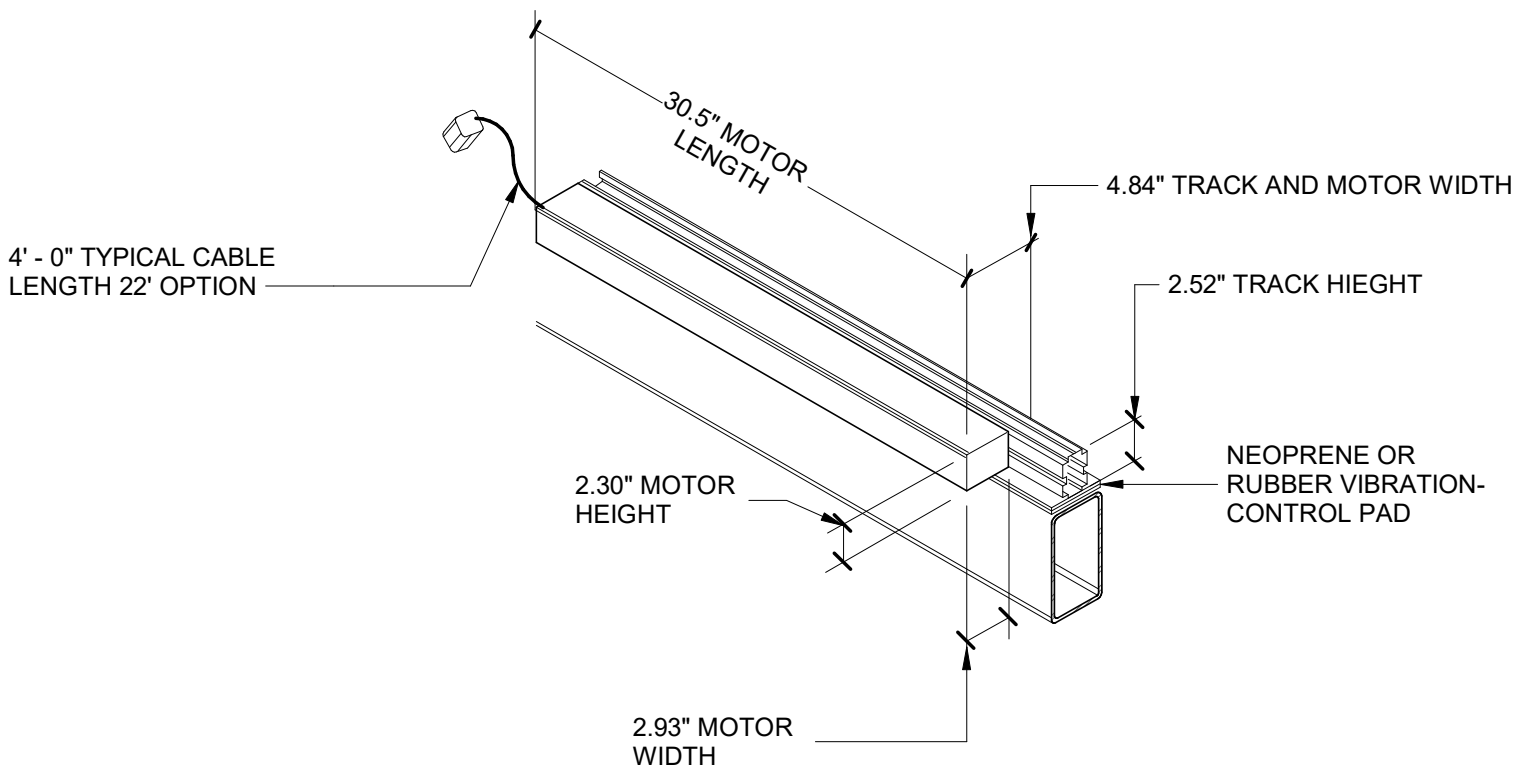

VIBRATION CONTROL NOTES:

RUBBER MOUNTS WITH DYNAMIC ABSORBERS:
INSTALL RUBBER MOUNTS BETWEEN THE MOTOR AND THE STEEL BEAMS. MOUNTS SHOULD BE CHOSEN BASED ON THE LOAD AND VIBRATION FREQUENCY CHARACTERISTICS OF THE MOTOR.


DYNAMIC VIBRATION ABSORBERS:
ATTACH DYNAMIC VIBRATION ABSORBERS TUNED TO THE MOTOR'S OPERATIONAL FREQUENCY RANGE TO THE STEEL BEAMS.
ENSURE MINIMAL DISTURBANCE TO SENSITIVE AUDIO-VISUAL EQUIPMENT AND LIGHTING FIXTURES THAT MIGHT BE IMPACTED BY VIBRATIONS. APPLY ANY COMBINATION OF MEASURES TO ABSORB AND DISSIPATE VIBRATIONS.

IDENTIFY SPECIFIC FREQUENCIES AND AMPLITUDES OF THE MOTOR'S VIBRATIONS, AND SELECT APPROPRIATE DEVICES FOR VIBRATION ISOLATION. ISOLATION MOUNTS, DAMPERS, OR ABSORBERS MAY SHOULD CONFORM TO IBC.


THE SELECTED DEVICES SHALL FOLLOW MANUFACTURER GUIDELINES, TO ENSURE OPTIMAL PERFORMANCE.

TEST THE SYSTEM TO VERIFY THE EFFECTIVENESS OF THE VIBRATION CONTROL MEASURES, AND MAKE ADJUSTMENTS AS NECESSARY TO FINE-TUNE PERFORMANCE.

G-CHANEL STABILIZATION

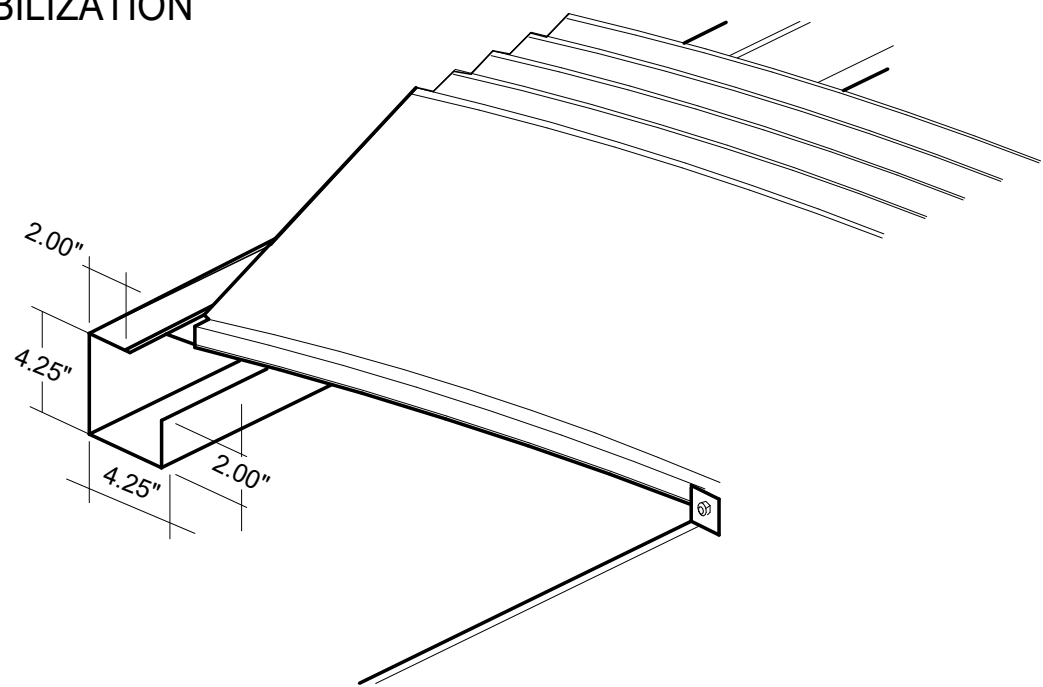


PARALLEL TO RAFTERS

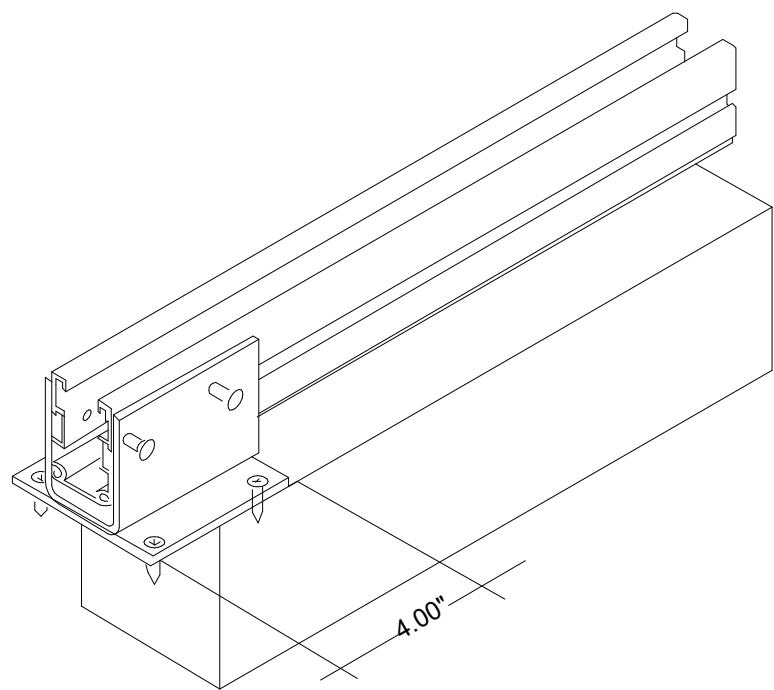


4
A-706
DETAIL - ISOMETRIC - VIBRATION COTROL

SCALE: 3/4\" = 1'-0"

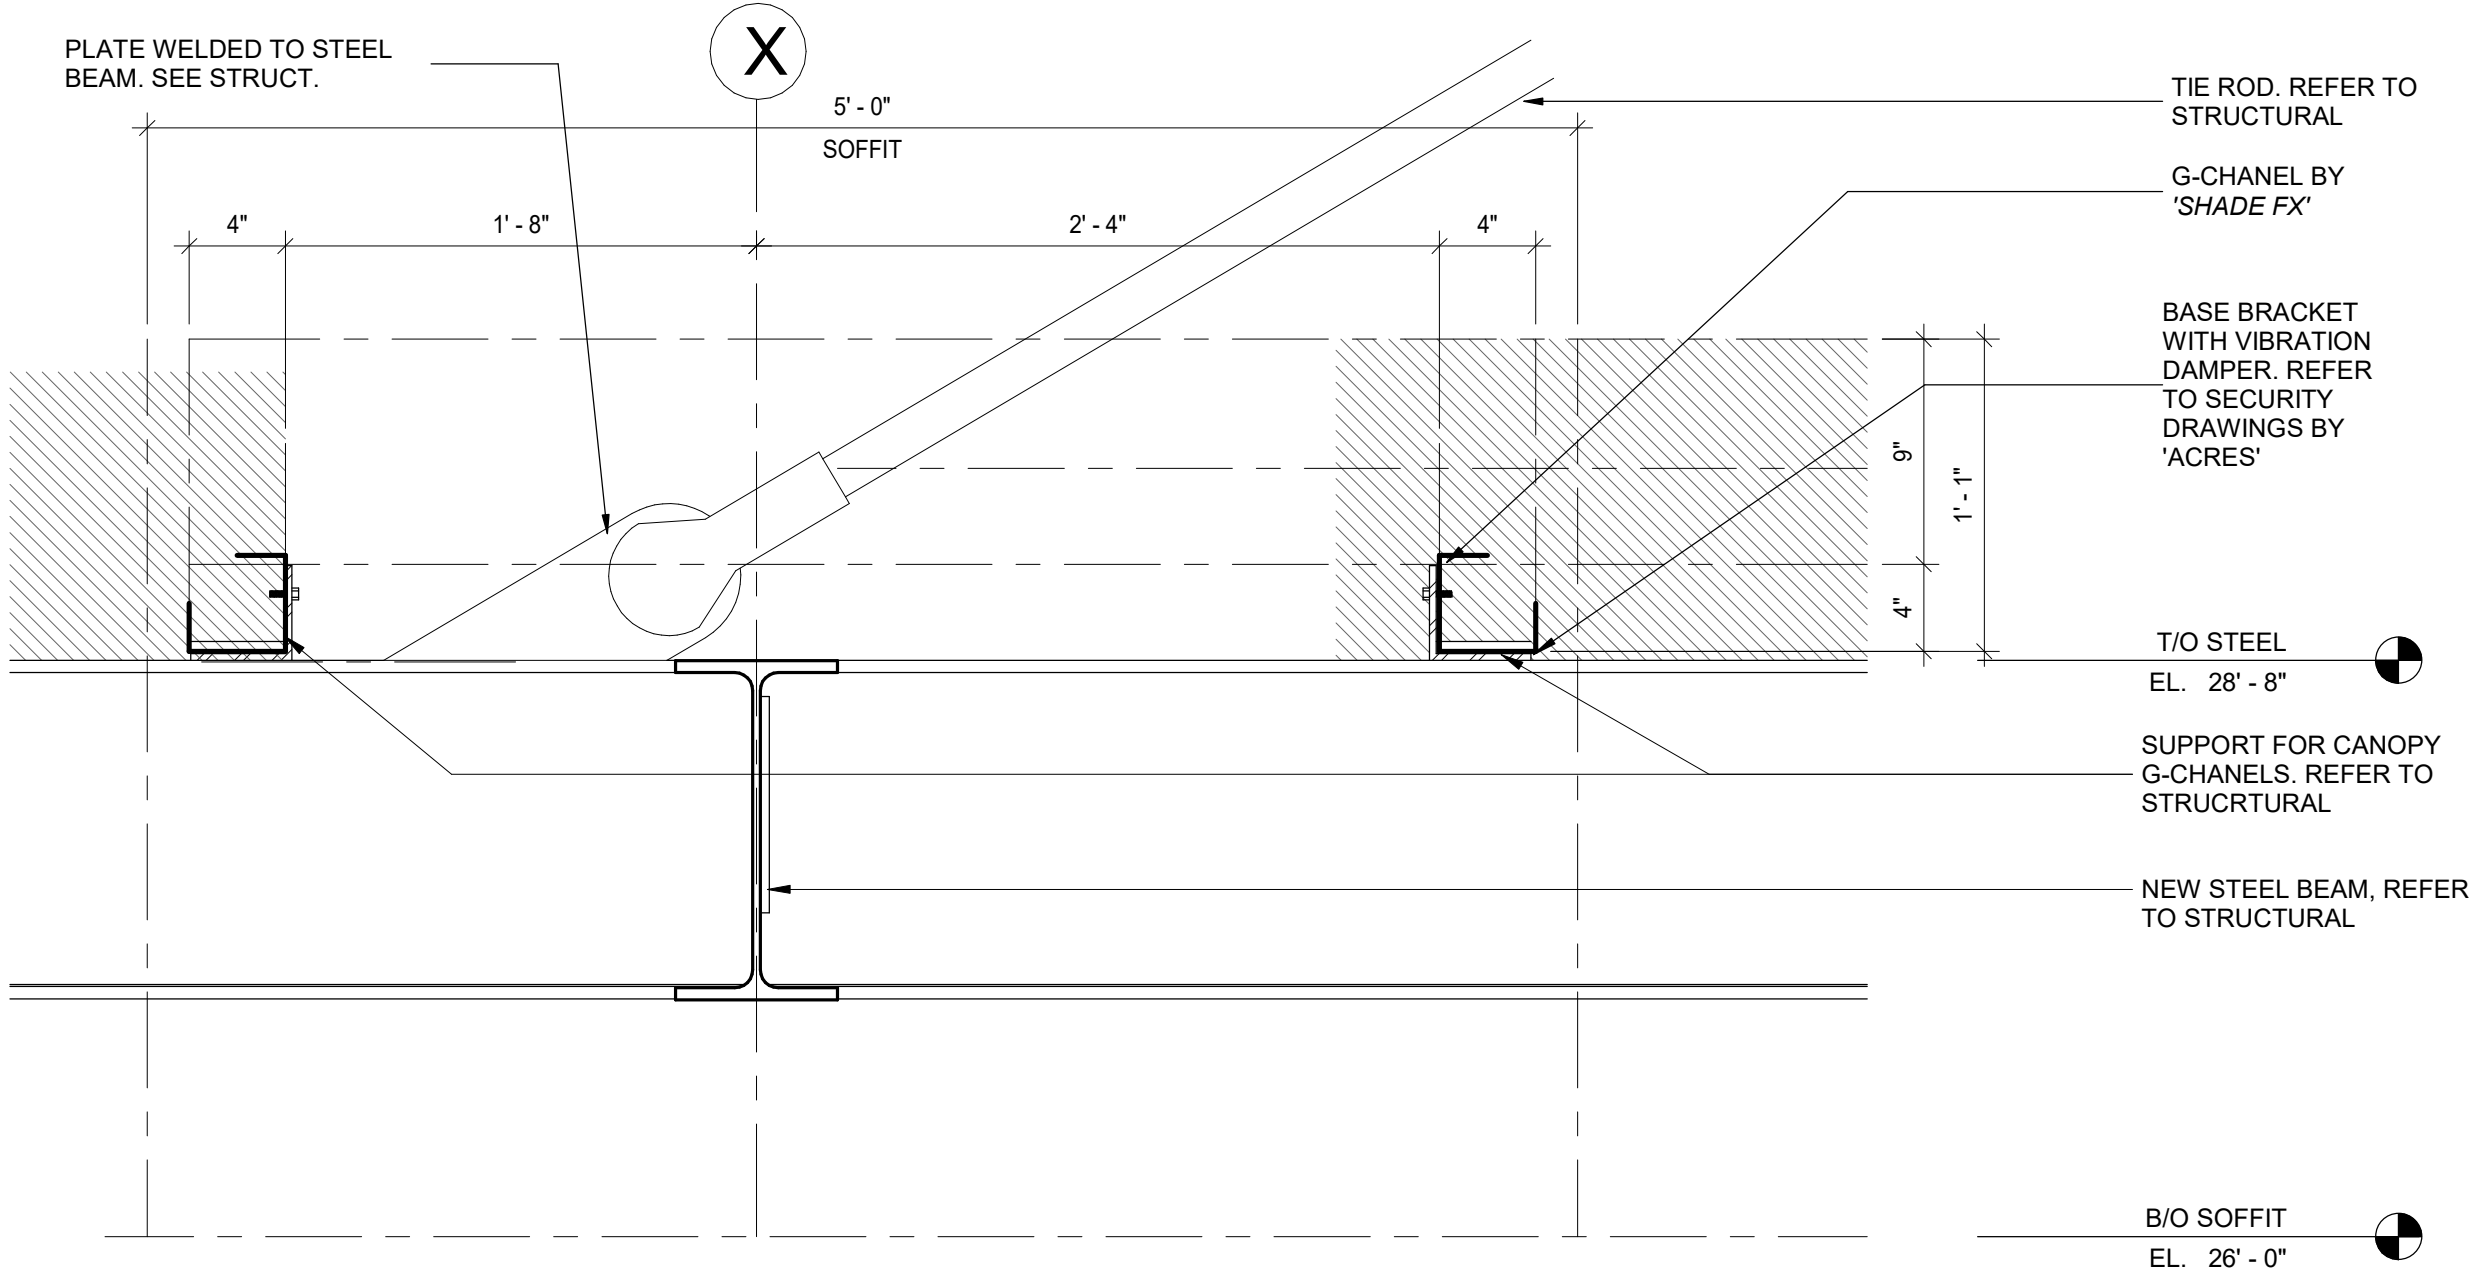


6
A-706
DETAIL SECTION - SHADEFX AT TIE ROD

SCALE: 1 1/2\" = 1'-0"

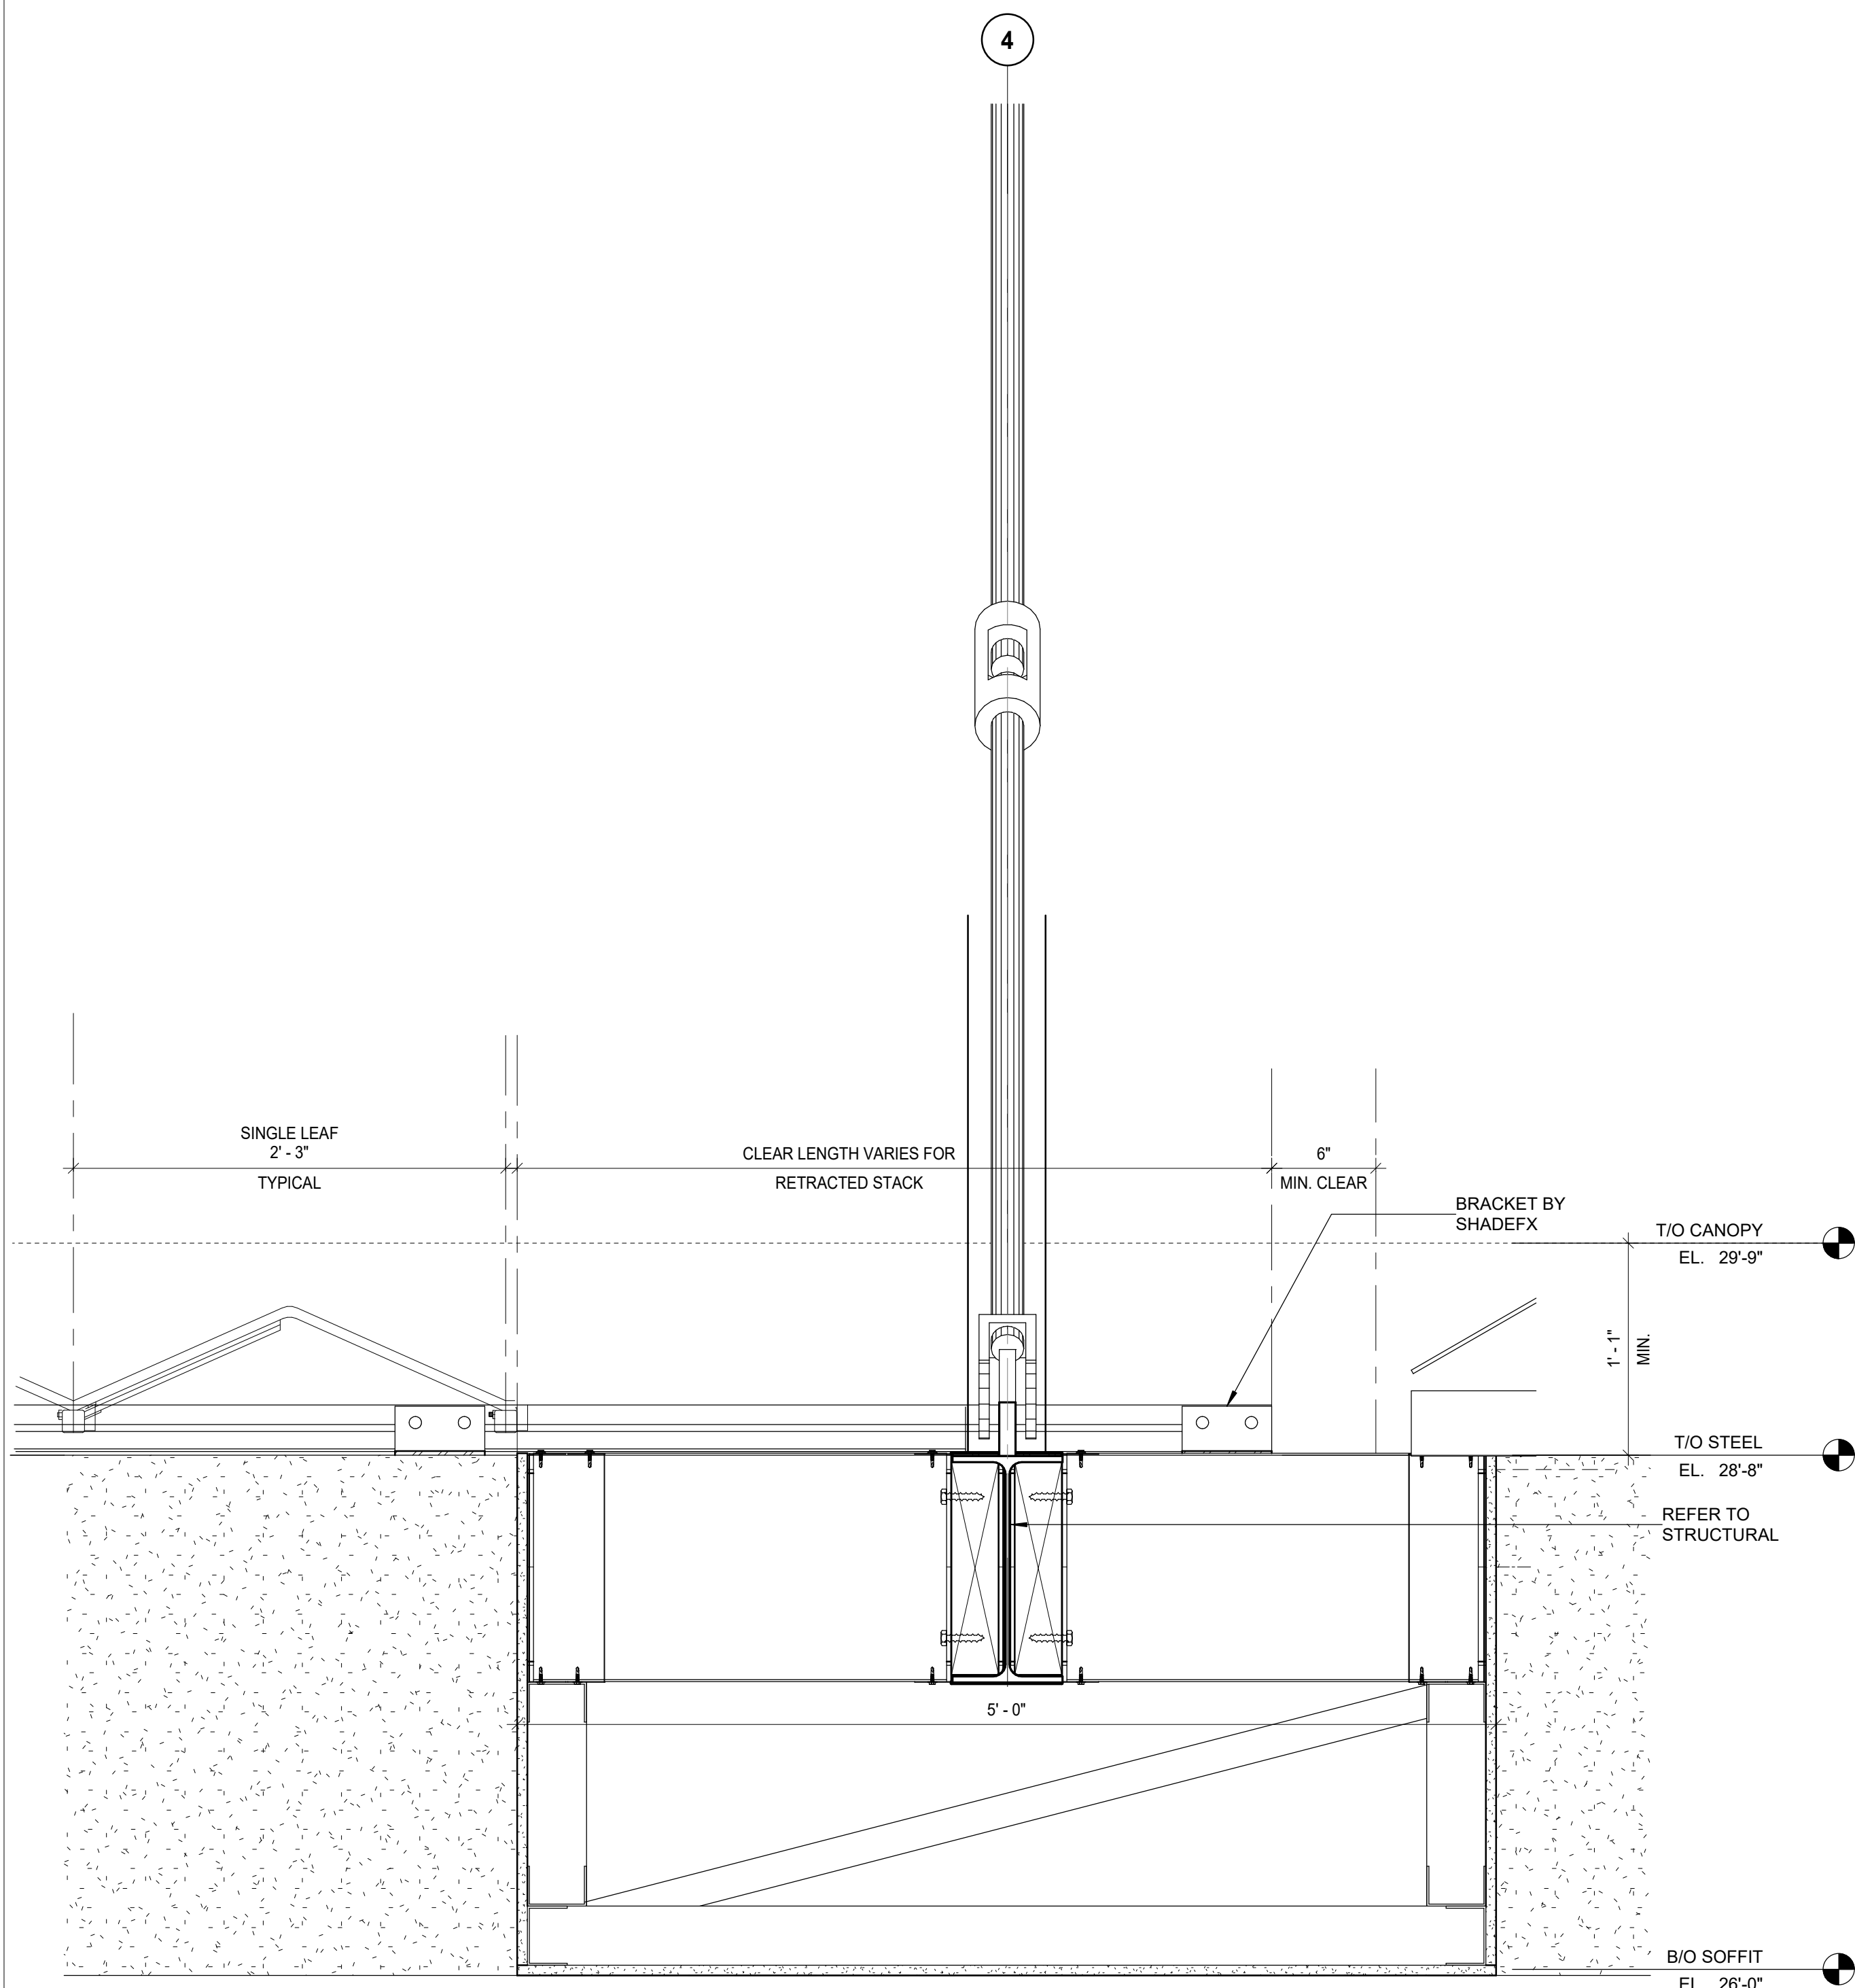



8
A-706
DETAIL - SECTION - RETRACTABLE CANOPY AT EQUIPMENT PLATFORM

SCALE: 1 1/2\" = 1'-0"

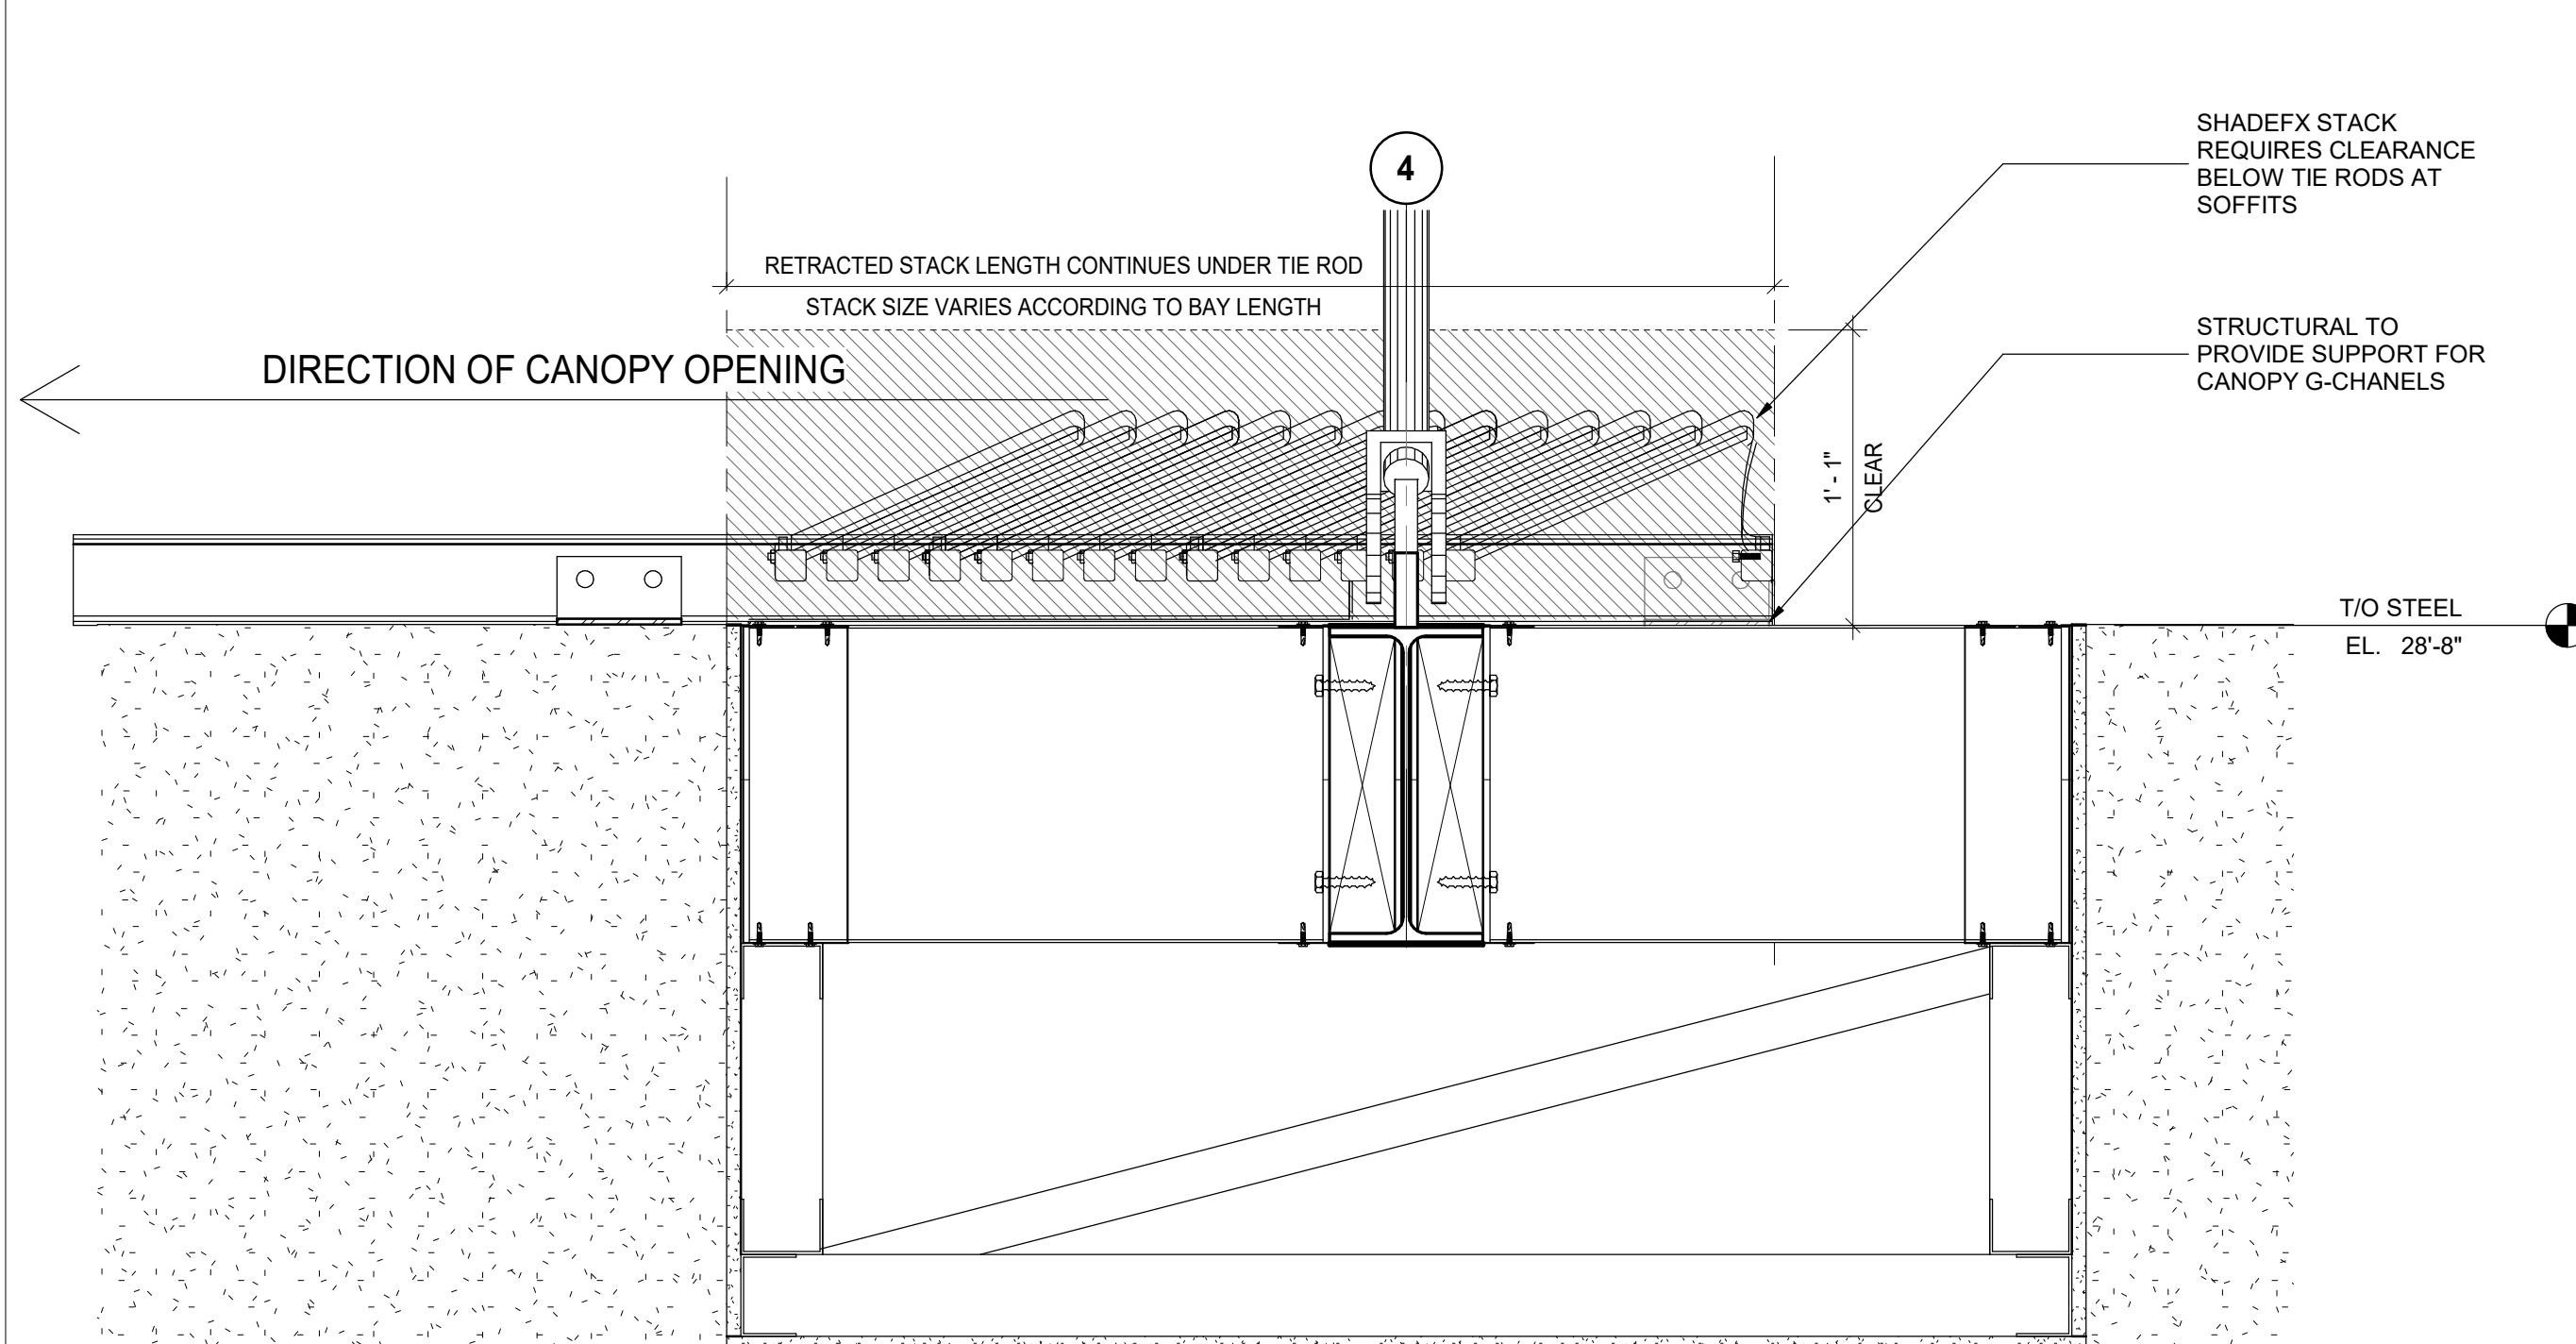

5
A-706
DETAIL - SECTION - RETRACTABLE CANOPY AT EQUIPMENT PLATFORM

SCALE: 1 1/2\" = 1'-0"

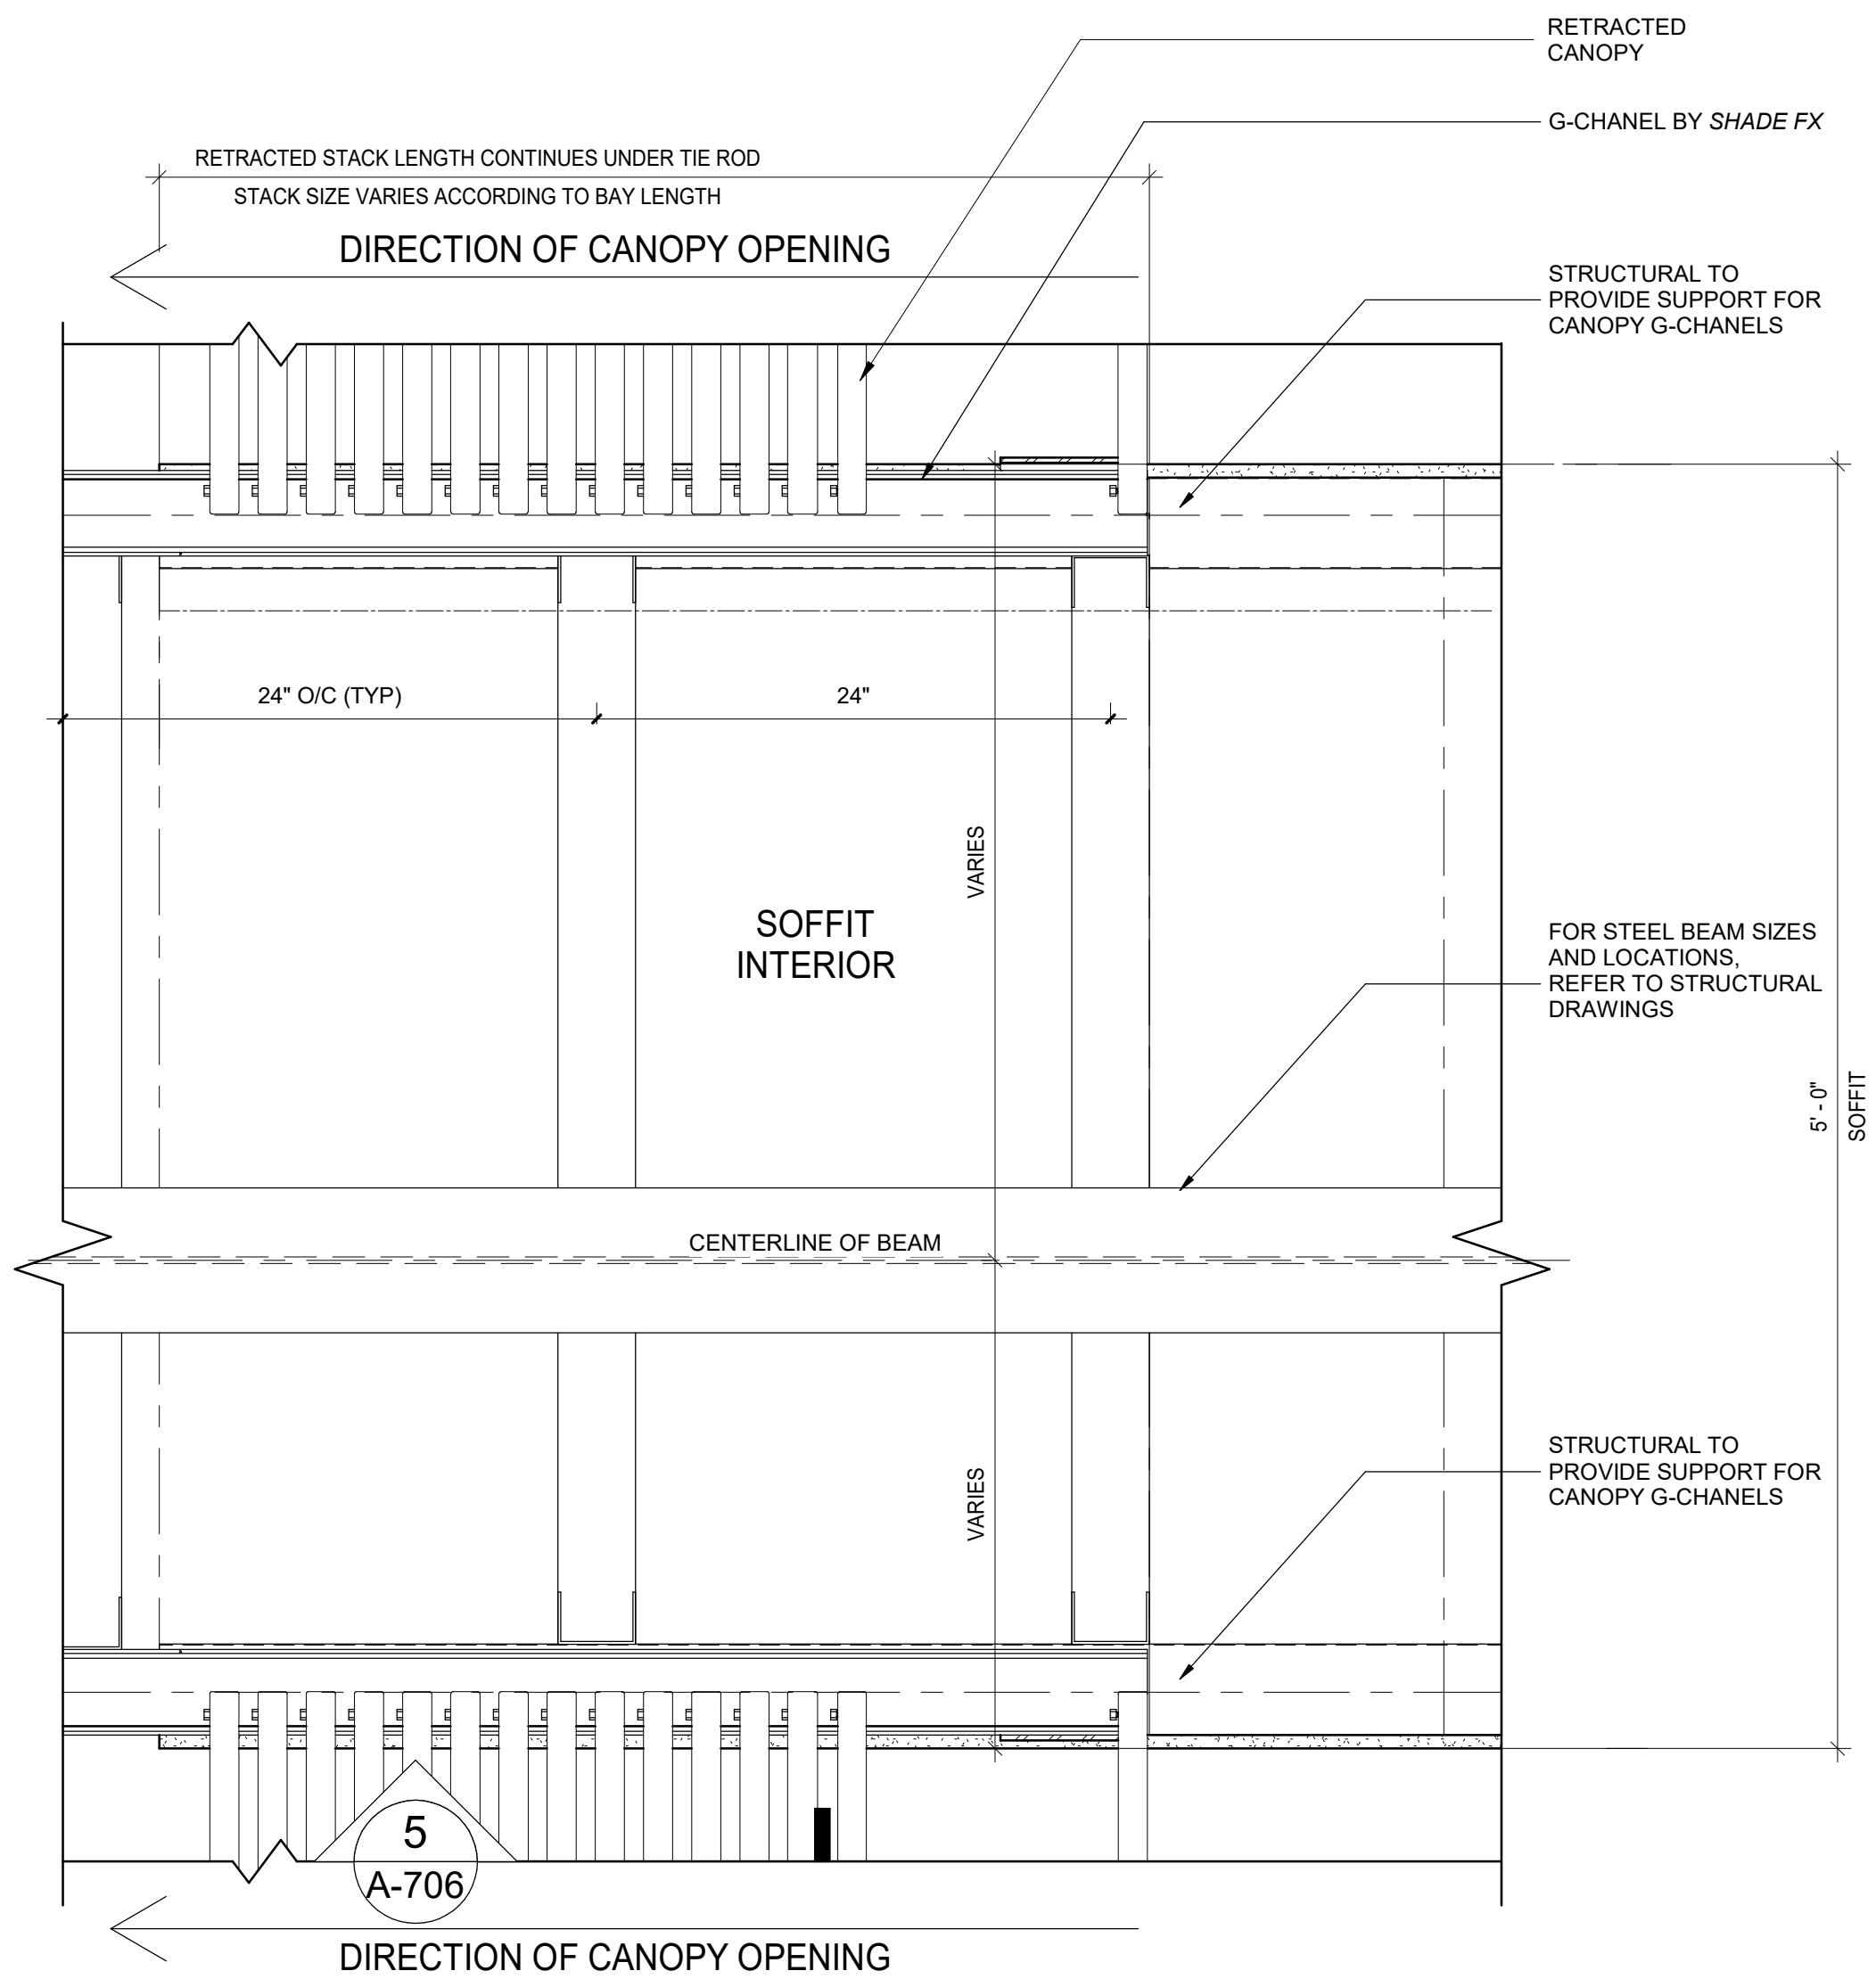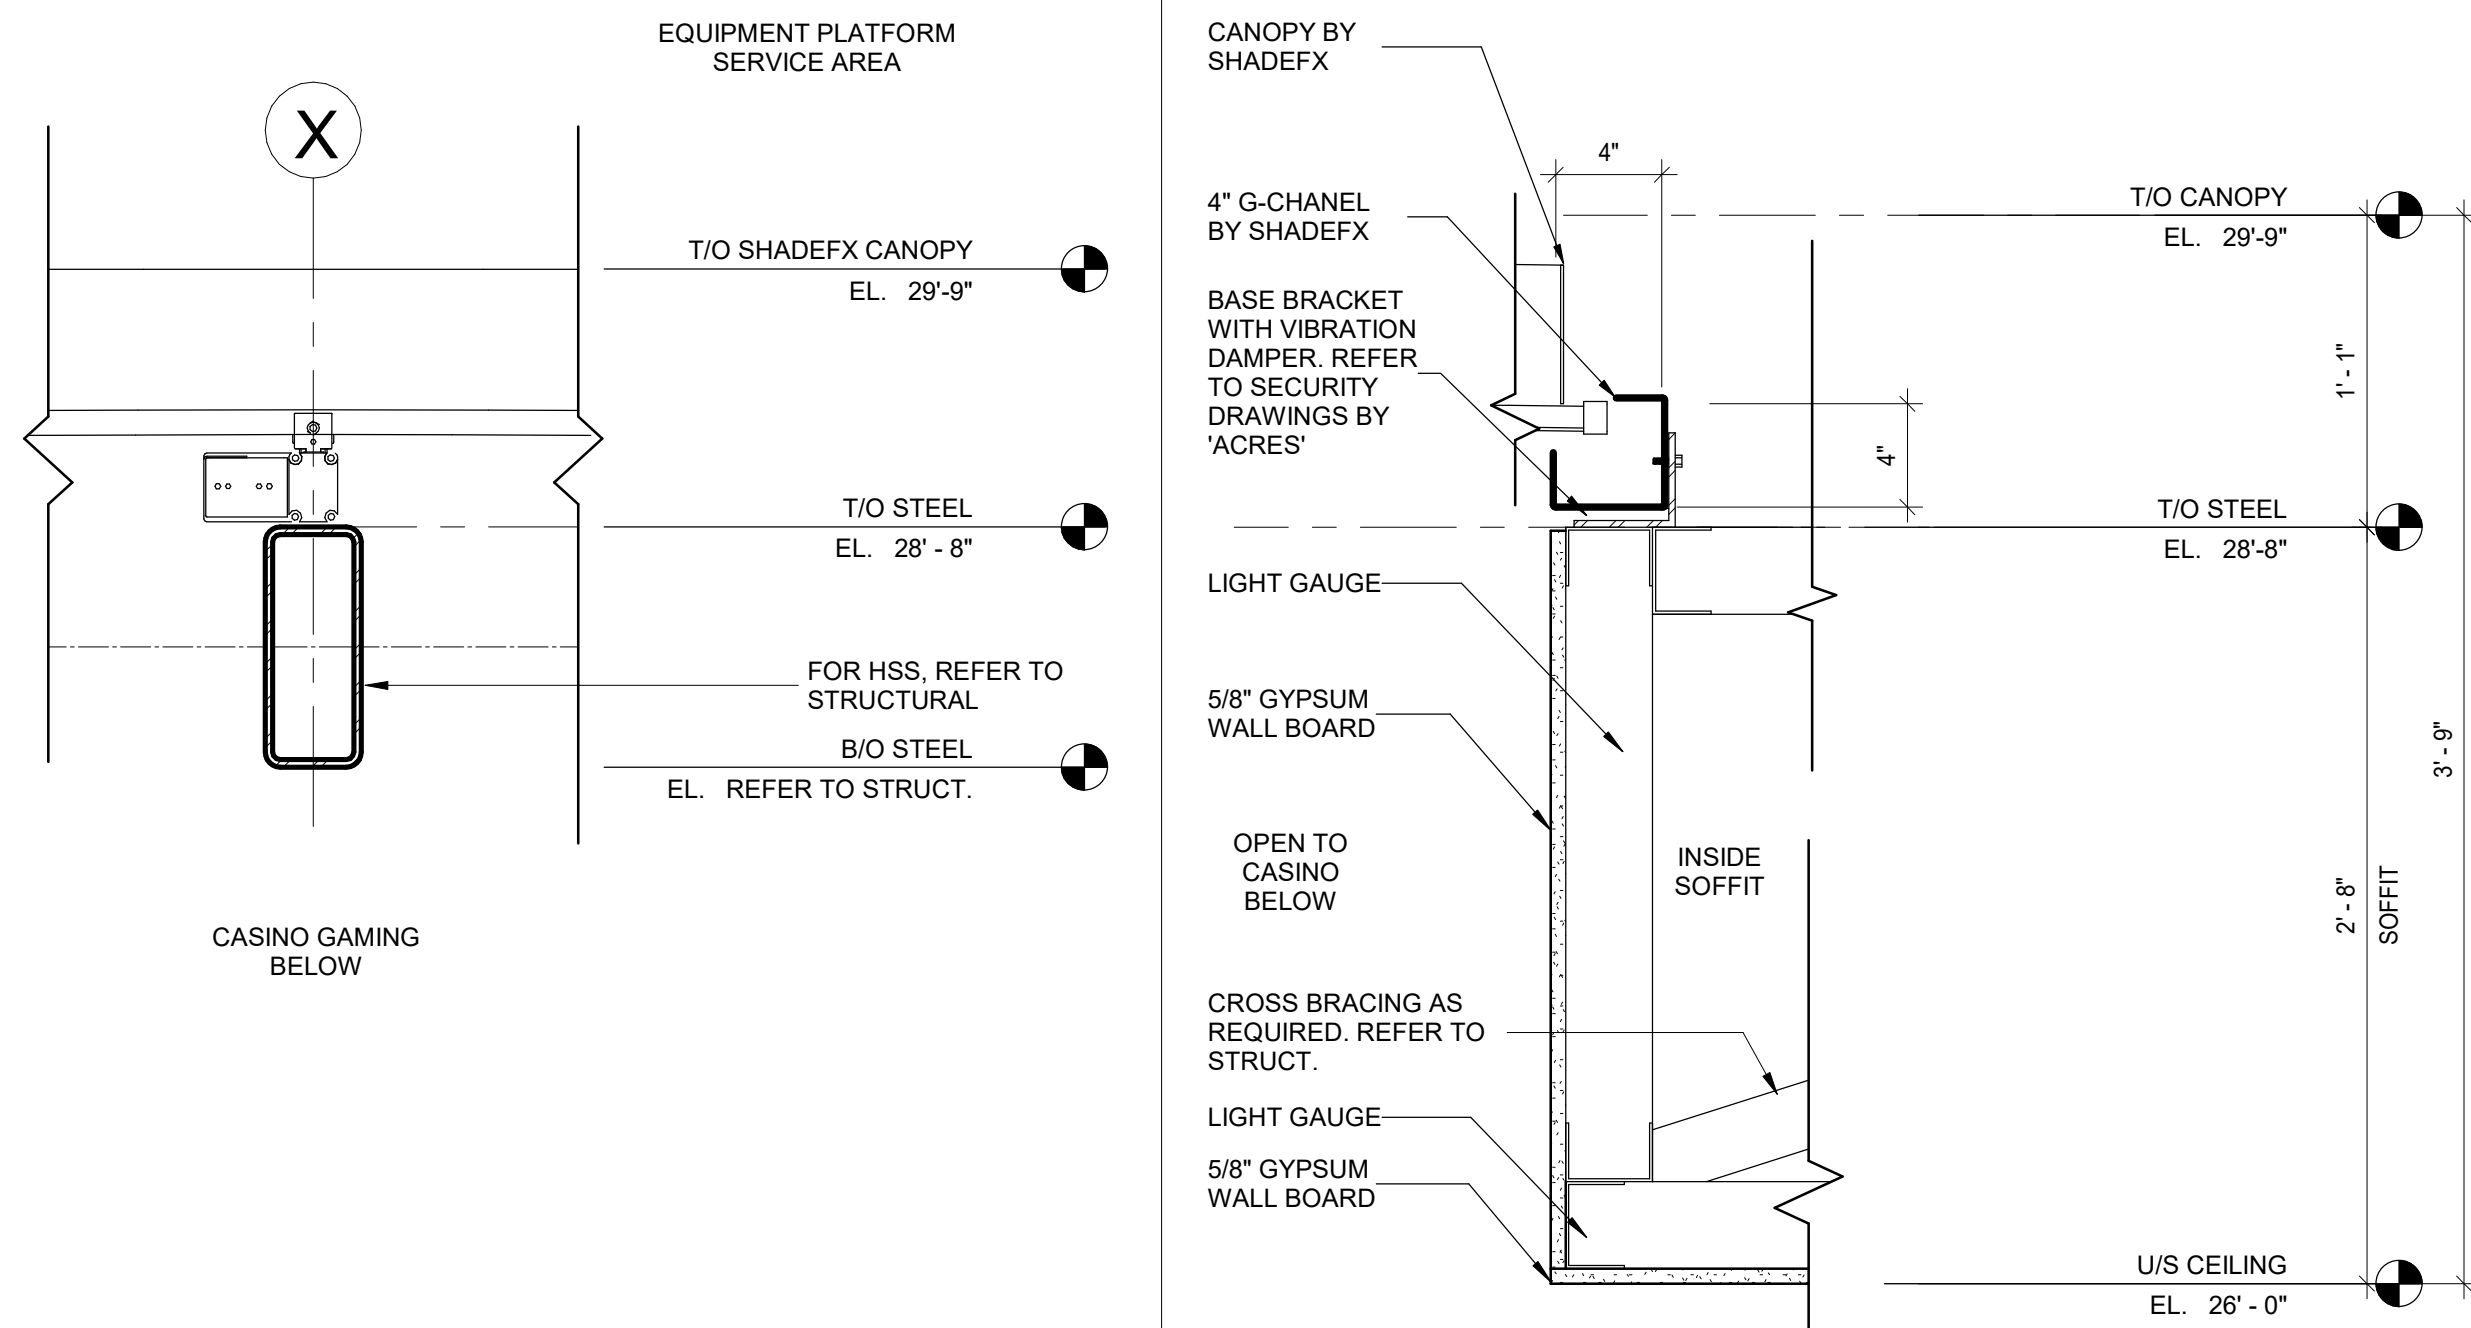

7
A-706
DETAIL - PLAN- RETRACTABLE CANOPY AT SOFFIT

SCALE: 1 1/2\" = 1'-0"

