MC74HC4067A

Quad Analog Switch/ Multiplexer/Demultiplexer

High−Performance Silicon−Gate CMOS

The MC74HC4067A utilizes silicon−gate CMOS technology to achieve fast propagation delays, low ON resistances, and low OFF−channel leakage current. This bilateral switch/ multiplexer/demultiplexer controls analog and digital voltages that may vary across the full power−supply range (from V_{CC} to GND).

The ON/OFF control inputs are compatible with standard CMOS outputs; with pullup resistors, they are compatible with LSTTL outputs. For analog switches with voltage−level translators, see the HC4316A.

Features

- Fast Switching and Propagation Speeds
- High ON/OFF Output Voltage Ratio
- Low Crosstalk Between Switches
- Diode Protection on All Inputs/Outputs
- Wide Power−Supply Voltage Range (V_{CC} − GND) = 2.0 to 6.0 V
- Analog Input Voltage Range (V_{CC} − GND) = 0 to 6.0 V
- Improved Linearity and Lower ON Resistance over Input Voltage
- Low Noise
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC−Q100 Qualified and PPAP Capable
- These are Pb−Free Devices

ON Semiconductor®

www.onsemi.com

MARKING DIAGRAMS



SOIC−24
DW SUFFIX
CASE 751E



TSSOP−24
DT SUFFIX
CASE 948H



A	= Assembly Location
L, WL	= Wafer Lot
Y, YY	= Year
W, WW	= Work Week
G	= Pb−Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 10 of this data sheet.

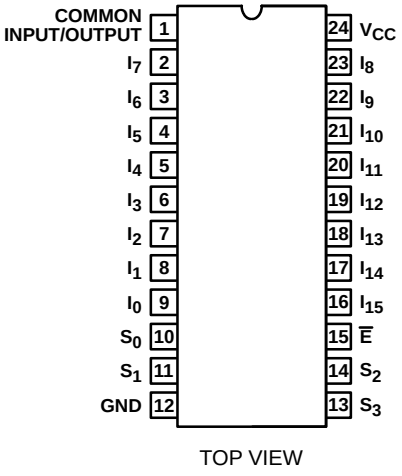

Figure 1. Pin Assignment

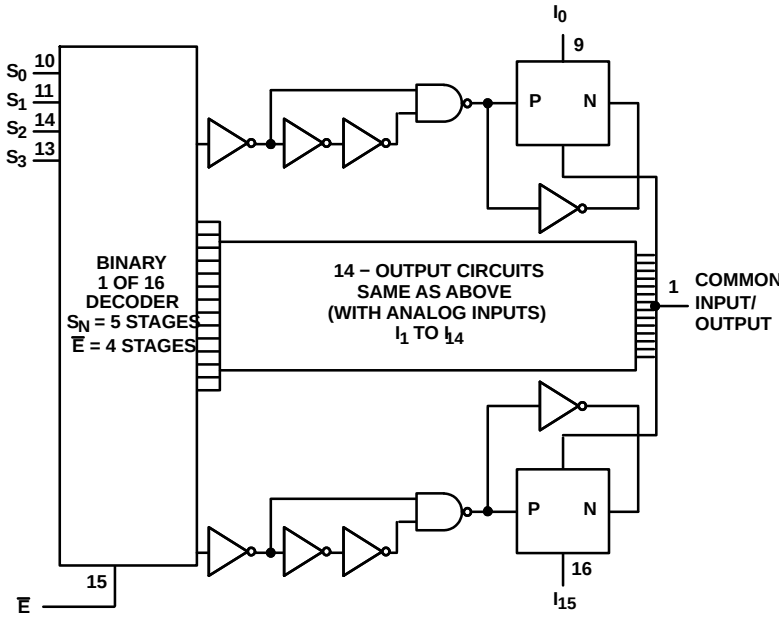

Figure 2. Function Diagram

TRUTH TABLE

S0	S1	S2	S3	$\overline{E}$	SELECTED CHANNEL
X	X	X	X	1	None
0	0	0	0	0	0
1	0	0	0	0	1
0	1	0	0	0	2
1	1	0	0	0	3
0	0	1	0	0	4
1	0	1	0	0	5
0	1	1	0	0	6
1	1	1	0	0	7
0	0	0	1	0	8
1	0	0	1	0	9
0	1	0	1	0	10
1	1	0	1	0	11
0	0	1	1	0	12
1	0	1	1	0	13
0	1	1	1	0	14
1	1	1	1	0	15

H= High Level
L= Low Level
X= Don't Care

MAXIMUM RATINGS

Symbol	Parameter		Value	Unit
V_{CC}	DC Supply Voltage		−0.5 to +7.0	V
V_{IS}	Analog Input Voltage		−0.5 to V_{CC} + 0.5	V
V_{IN}	Digital Input Voltage		−0.5 to V_{CC} + 0.5	V
I_{IK}	Input Clamping Current	V_{IN} < −0.5 V or V_{IN} > V_{CC} + 0.5 V	±20	mA
I_{SK}	Switch Input Clamping Current	V_{IS} < −0.5 V or V_{IS} > V_{CC} + 0.5 V	±20	mA
I_{IS}	DC Switch Current		±25	mA
I_O	DC Output Source / Sink Current		±25	mA
I_{CC}	DC Supply Current per Supply Pin		±100	mA
I_{GND}	DC Ground Current per Ground Pin		±100	mA
T_{STG}	Storage Temperature Range		−65 to +150	°C
T_L	Lead Temperature, 1 mm from Case for 10 Seconds		260	°C
T_J	Junction Temperature under Bias		+150	°C
θ_{JA}	Thermal Resistance	SOIC TSSOP	97 148	°C/W
P_D	Power Dissipation in Still Air at 85°C	SOIC TSSOP	500 450	mW
MSL	Moisture Sensitivity		Level 1	
F_R	Flammability Rating	Oxygen Index: 30% − 35%	UL−94−VO (0.125 in)	
V_{ESD}	ESD Withstand Voltage	Human Body Model (Note 1) Machine Model (Note 2)	>3000 >200	V
$I_{Latchup}$	Latchup Performance	Above V_{CC} and Below GND at 85°C (Note 3)	±100	mA

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Tested to EIA/JESD22−A114−A.
2. Tested to EIA/JESD22−A115−A.
3. Tested to EIA/JESD78.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter		Min	Max	Unit
V_{CC}	Positive DC Supply Voltage (Referenced to GND)		2.0	6.0	V
V_{IS}	Analog Input Voltage (Referenced to GND)		GND	V_{CC}	V
V_{in}	Digital Input Voltage (Referenced to GND)		GND	V_{CC}	V
V_{IO}*	Static or Dynamic Voltage Across Switch		−	1.2	V
T_A	Operating Temperature, All Package Types		–55	+125	°C
t_r, t_f	Input Rise and Fall Rate (Digital Inputs)	V_{CC} = 2.0 V V_{CC} = 3.0 V V_{CC} = 4.5 V V_{CC} = 6.0 V	0 0 0 0	1000 600 500 400	ns

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

*For voltage drops across the switch greater than 1.2 V (switch on), excessive V_{CC} current may be drawn; i.e., the current out of the switch may contain both V_{CC} and switch input components. The reliability of the device will be unaffected unless the Maximum Ratings are exceeded.

DC ELECTRICAL CHARACTERISTIC Digital Section (Voltages Referenced to GND)

Symbol	Parameter	Conditions	V_{CC} (V)	Guaranteed Limit							Unit
				25°C			−40 to 85°C		−55 to 125°C		
				Min	Typ	Max	Min	Max	Min	Max	
V_{IH}	Minimum High−Level Input Voltage, Channel−Select or Enable Inputs		2.0 3.0 4.5 6.0	1.5 2.1 3.15 4.2			1.5 2.1 3.15 4.2			1.5 2.1 3.15 4.2	V
V_{IL}	Maximum Low−Level Input Voltage, Channel−Select or Enable Inputs		2.0 3.0 4.5 6.0			0.5 0.9 1.35 1.8		0.5 0.9 1.35 1.8		0.5 0.9 1.35 1.8	V
I_{IN}	Input Leakage Current, Control Inputs	$V_{IN} = V_{CC}$ or GND	6.0			±0.1		±1.0		±1.0	μA
I_{CC}	Maximum Supply Current per Package	$V_{IN} = V_{CC}$ or GND, I_O=0 V_{IS} = GND or V_{CC}, $V_{OS} = V_{CC}$ or GND	6.0			4.0		40		80	μA
R_{ON}	ON Resistance	I_O = 1 mA $V_{IN} = V_{CC}$ or GND, $V_{IS} = V_{CC}$ or GND	4.5 6.0		70 60	160 140		200 175		240 210	Ω
$R_{ON(peak)}$	ON Resistance (peak)	I_O = 1 mA $V_{IN} = V_{CC}$ to GND, $V_{IS} = V_{CC}$ to GND	4.5 6.0		90 80	180 160		225 200		270 240	Ω
ΔR_{on}	ON Resistance Mismatch Between Any 2 Switches		4.5 6.0		10 8.5						Ω
I_{OFF}	OFF−State Leakage Current, All Channels	SW OFF, $V_{IS} = V_{CC}$ or GND	6.0			±0.8		±8		±8	μA
I_{ON}	ON−State Leakage Current	SW OFF, $V_{IS} = V_{CC}$ or GND	6.0			±0.8		±8		±8	μA

AC CHARACTERISTICS (INPUT t_r, t_f = 6 ns)

Symbol	Parameter	Conditions	V_{CC} (V)	Guaranteed Limits							Unit
				25°C			–40 to 85°C		–55 to 125°C		
				Min	Typ	Max	Min	Max	Min	Max	
t_{PLH}, t_{PHL}	Propagation Delay Switch In to Out	C_L = 50 pF	2.0 4.5 6.0			75 15 13		95 19 16		110 22 19	ns
		C_L = 15 pF	5.0		6.0						
t_{ON}	Switch Turn−ON Time										ns
	$\overline{E}$ to Out	C_L = 50 pF	2.0 4.5 6.0			275 55 47		345 69 59		415 83 71	
		C_L = 15 pF	5.0		23						
	SN to Out	C_L = 50 pF	2.0 4.5 6.0			300 60 51		375 75 64		450 90 76	
		C_L = 15 pF	5.0		25						
t_{OFF}	Switch Turn−OFF Time										ns
	$\overline{E}$ to Out	C_L = 50 pF	2.0 4.5 6.0			275 55 47		345 69 59		415 83 71	
		C_L = 15 pF	5.0		23						
	SN to Out	C_L = 50 pF	2.0 4.5 6.0			290 58 49		365 73 62		435 87 74	
		C_L = 15 pF	5.0		21						
C_{in}	Input Capacitance, Control Pins				3.5	10		10		10	pF
C_{PD}	Power Dissipation Capacitance (Note 4)	C_L = 15 pF	5.0			29					pF

4. C_{PD} is used to determine the dynamic power consumption, per multivibrator.

ANALOG SWITCH CHANNEL CHARACTERISTICS

Symbol	Parameter	Conditions	V_{CC} (V)	Limit* 25°C	Unit
BW	Maximum On−Channel Bandwidth or Minimum Frequency Response	f_{in} = 1 MHz Sine Wave Adjust f_{in} Voltage to Obtain 0 dBm at V_{OS} Increase f_{in} Frequency Until dB Meter Reads – 3 dB R_L = 50 Ω, C_L = 10 pF	4.5	90	MHz
−	Off−Channel Feedthrough Isolation	f_{in} ≡ Sine Wave Adjust f_{in} Voltage to Obtain 0 dBm at V_{IS} f_{in} = 10 kHz, R_L = 600 Ω, C_L = 50 pF f_{in} = 1.0 MHz, R_L = 50 Ω, C_L = 10 pF	 4.5 4.5	 −65 −75	dB
−	Feedthrough Noise $\overline{E}$, Sn to Switch	V_{in} ≤ 1 MHz Square Wave (t_r = t_f = 6 ns) Adjust R_L at Setup so that I_S = 0 A R_L = 600 Ω, C_L = 50 pF R_L = 10 kΩ, C_L = 10 pF	 4.5 4.5	 60 30	mV_{PP}
−	Crosstalk Between Any Two Switches	f_{in} ≡ Sine Wave Adjust f_{in} Voltage to Obtain 0 dBm at V_{IS} f_{in} = 10 kHz, R_L = 600 Ω, C_L = 50 pF f_{in} = 1.0 MHz, R_L = 50 Ω, C_L = 10 pF	 4.5 4.5	 –70 –80	dB
THD	Total Harmonic Distortion	f_{in} = 1 kHz, R_L = 10 kΩ, C_L = 50 pF $THD = THD_{Measured} - THD_{Source}$ V_{IS} = 4.0 V_{PP} sine wave	 4.5	 0.04	%
C_S	Switch Input Capacitance			5	pF
C_{COM}	Switch Common Capacitance			45	pF

*Limits not tested. Determined by design and verified by qualification.

TYPICAL CHARACTERISTICS

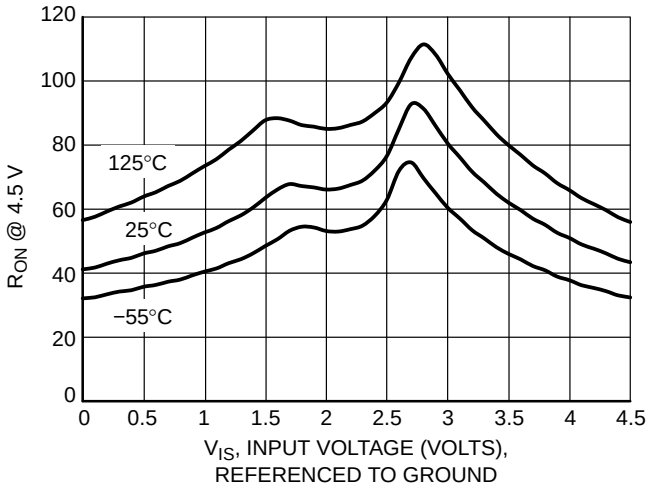

Figure 3. Typical On Resistance, V_{CC} = 4.5 V

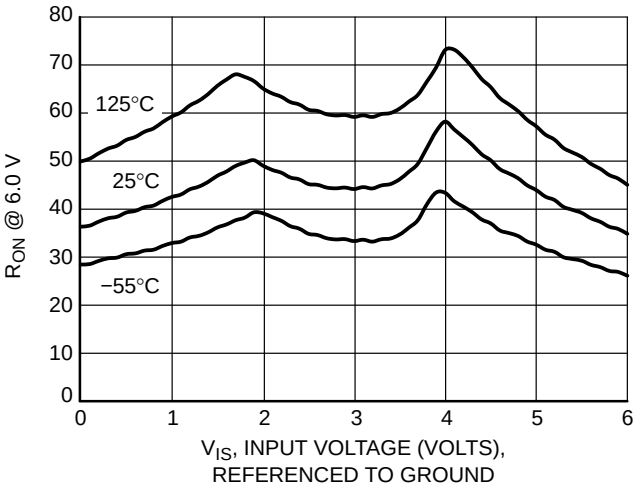

Figure 4. Typical On Resistance, V_{CC} = 6.0 V

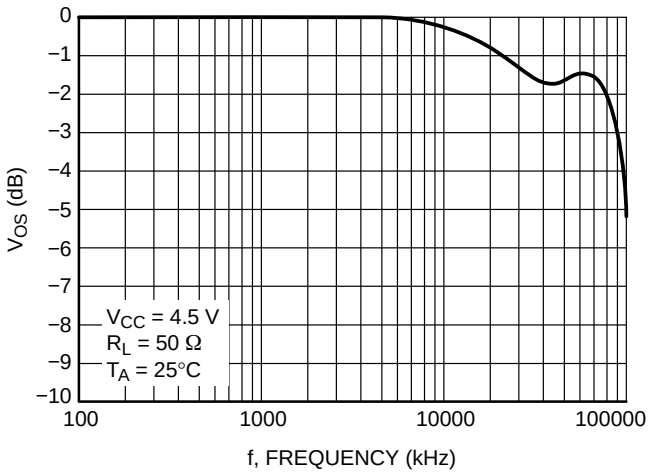

Figure 5. Typical Switch Frequency Response

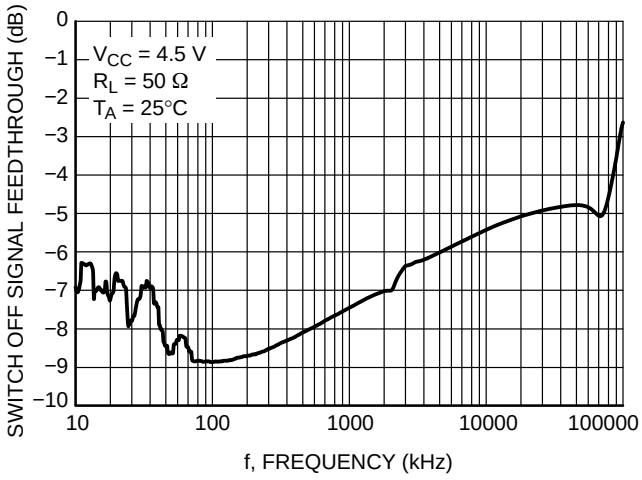

Figure 6. Typical Switch OFF Signal Feedthrough vs Frequency

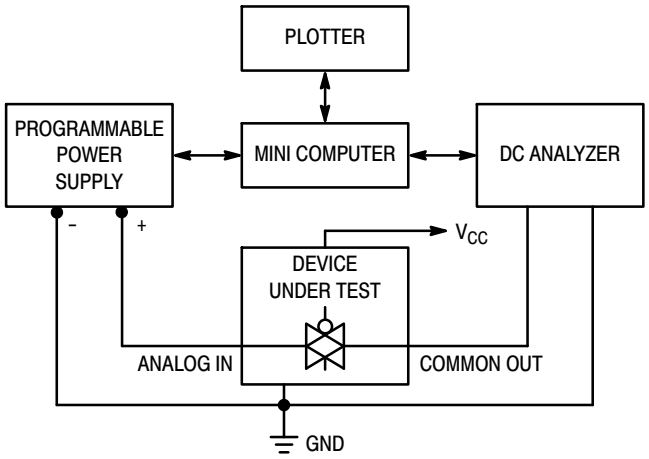

Figure 7. On Resistance Test Setup

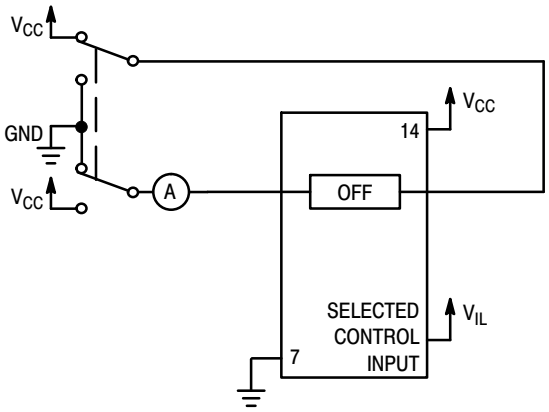

Figure 8. OFF Channel Leakage Current Test Setup, Any One Channel

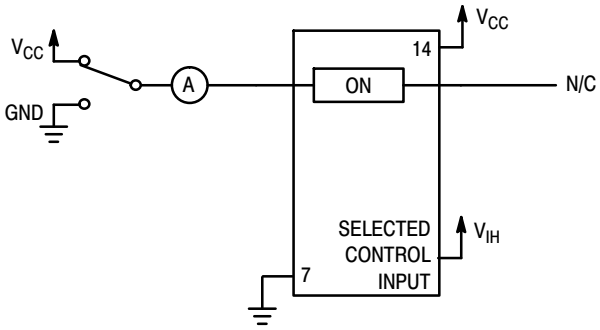

Figure 9. ON Channel Leakage Current Test Setup

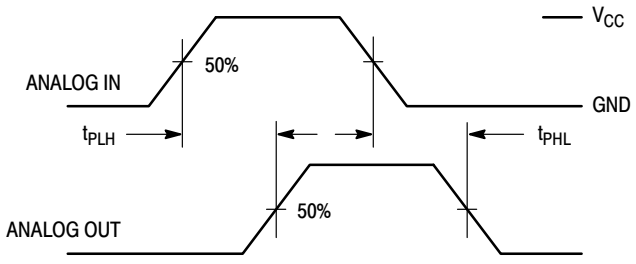

Figure 10. Propagation Delay, Analog In to Analog Out

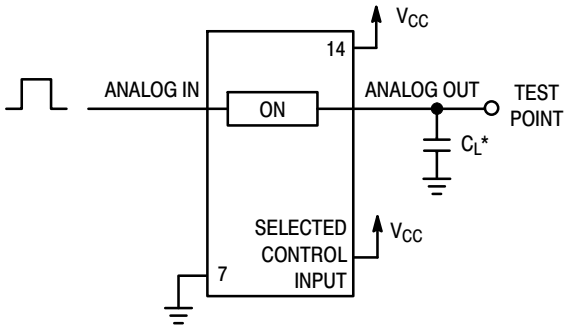

*Includes all probe and jig capacitance.

Figure 11. Propagation Delay Test Setup

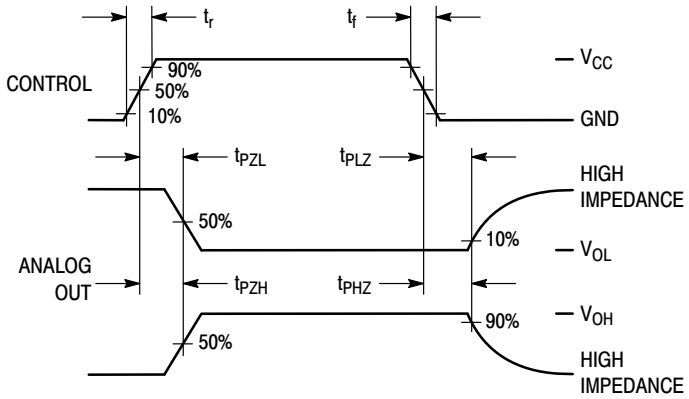

Figure 12. Turn−ON / Turn−OFF Times

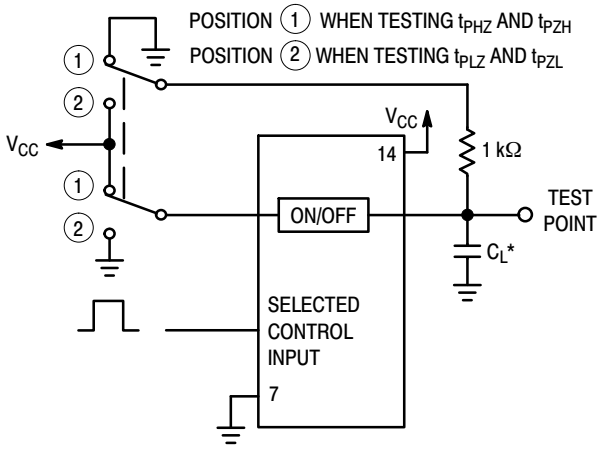

*Includes all probe and jig capacitance.

Figure 13. Turn−ON / Turn−OFF Time Test Setup

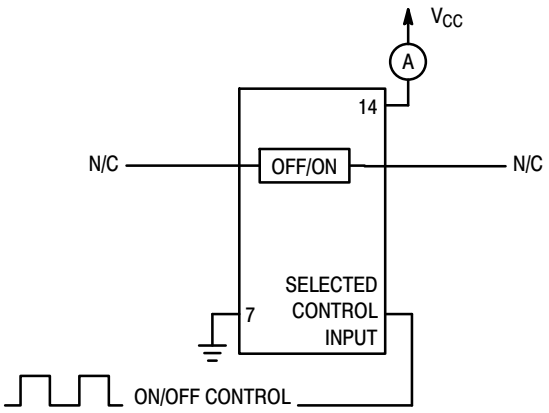

Figure 14. Power Dissipation Capacitance Test Setup

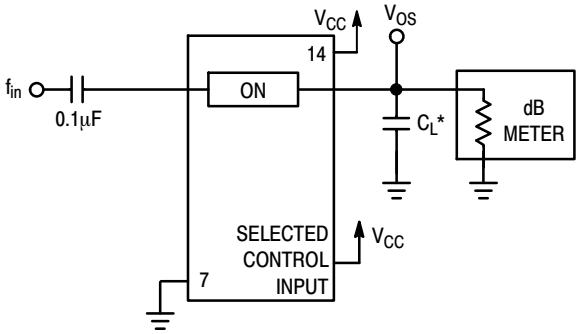

*Includes all probe and jig capacitance.

Figure 15. ON Channel Bandwidth Test Setup

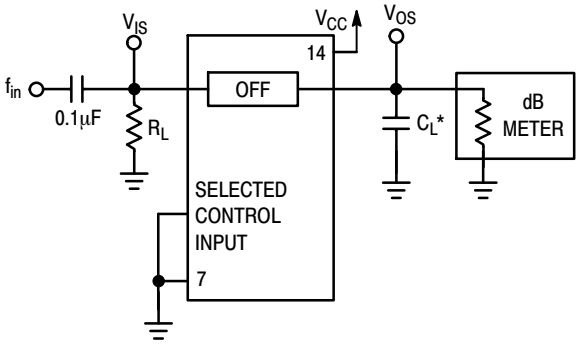

*Includes all probe and jig capacitance.

Figure 16. OFF Channel Feedthrough Isolation Test Setup

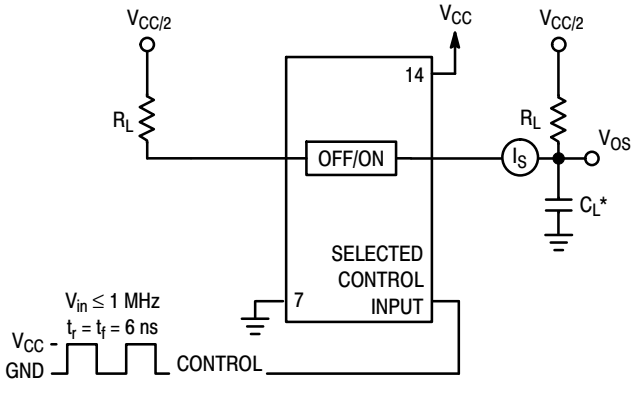

*Includes all probe and jig capacitance.

Figure 17. Feedthrough Noise Test Setup

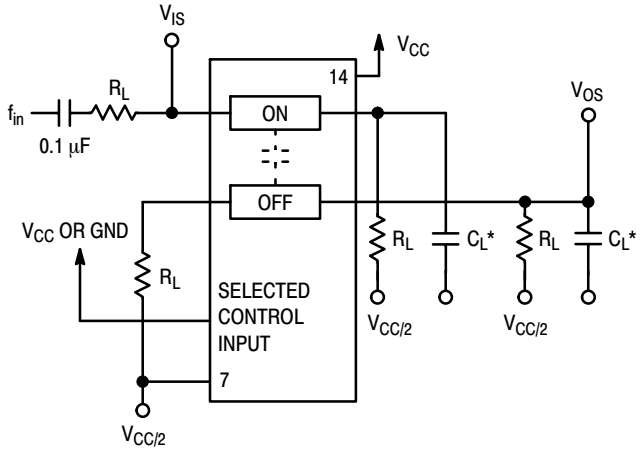

*Includes all probe and jig capacitance.

Figure 18. Crosstalk Between Any Two Switches Test Setup

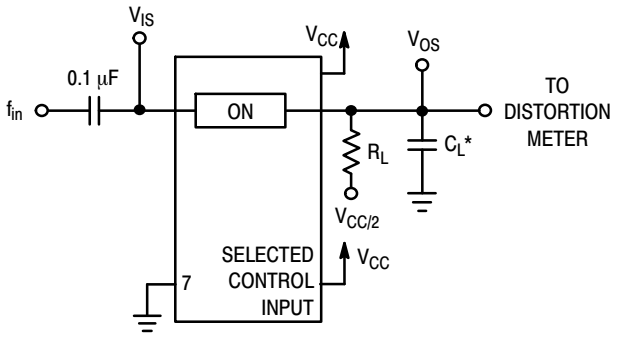

*Includes all probe and jig capacitance.

Figure 19. Total Harmonic Distortion Test Setup

ORDERING INFORMATION

Device	Package	Shipping†
MC74HC4067ADWG	SOIC−24 (Pb−Free)	30 Units / Tube
MC74HC4067ADWR2G	SOIC−24 (Pb−Free)	1000 / Tape & Reel
MC74HC4067ADTG	TSSOP−24 (Pb−Free)	62 Units / Tube
MC74HC4067ADTR2G	TSSOP−24 (Pb−Free)	2500 / Tape & Reel
NLV74HC4067ADTR2G*	TSSOP−24 (Pb−Free)	2500 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC−Q100 Qualified and PPAP Capable.

PACKAGE DIMENSIONS

SOIC−24 WB
CASE 751E−04
ISSUE F

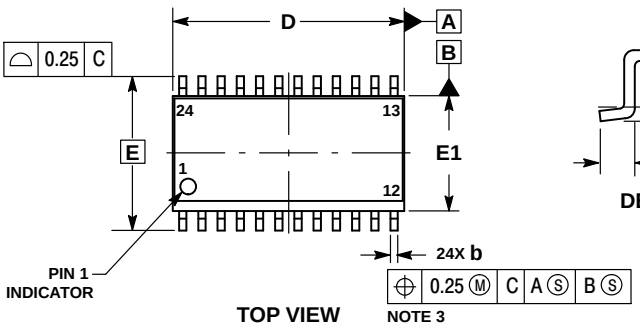



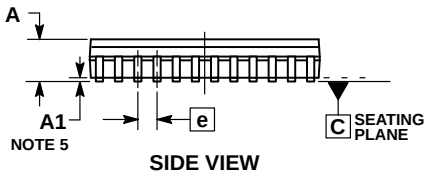



NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSIONS b AND c APPLY TO THE FLAT SECTION OF THE LEAD AND ARE MEASURED BETWEEN 0.10 AND 0.25 FROM THE LEAD TIP.
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 mm PER SIDE. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 PER SIDE. DIMENSIONS D AND E1 ARE DETERMINED AT DATUM H.
5. A1 IS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.

	MILLIMETERS	
DIM	MIN	MAX
A	2.35	2.65
A1	0.13	0.29
b	0.35	0.49
c	0.23	0.32
D	15.25	15.54
E	10.30 BSC	
E1	7.40	7.60
e	1.27 BSC	
h	0.25	0.75
L	0.41	0.90
M	0 °	8 °

RECOMMENDED SOLDERING FOOTPRINT*

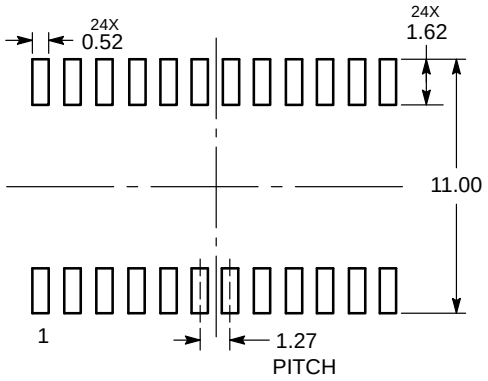

DIMENSIONS: MILLIMETERS

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PACKAGE DIMENSIONS

TSSOP24 7.8x4.4, 0.65P
CASE 948H
ISSUE B

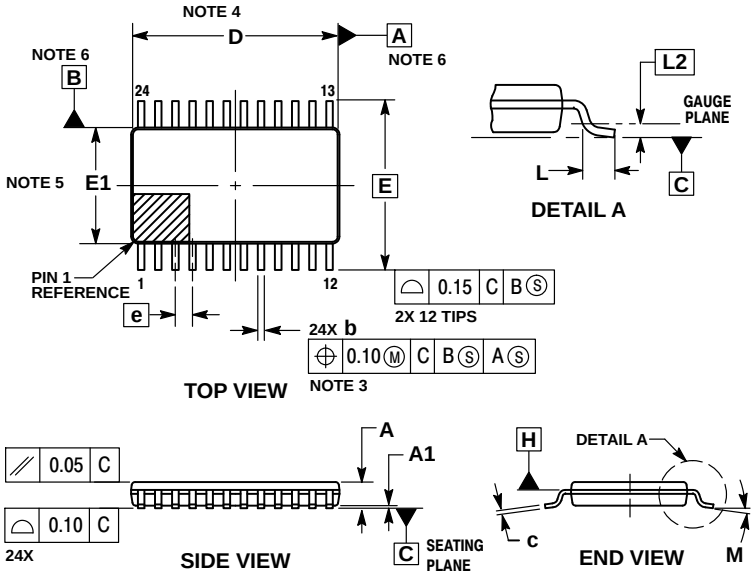

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL BE 0.08 MAX AT MMC. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.
4. DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSION D IS DETERMINED AT DATUM PLANE H.
5. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 PER SIDE. DIMENSION E1 IS DETERMINED AT DATUM PLANE H.
6. DATUMS A AND B ARE DETERMINED AT DATUM PLANE H.
7. A1 IS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.

	MILLIMETERS	
DIM	MIN	MAX
A	---	1.20
A1	0.05	0.15
b	0.19	0.30
c	0.09	0.20
D	7.70	7.90
E	6.40 BSC	
E1	4.30	4.50
e	0.65 BSC	
L	0.50	0.75
L2	0.25 BSC	
M	0°	8°

RECOMMENDED SOLDERING FOOTPRINT

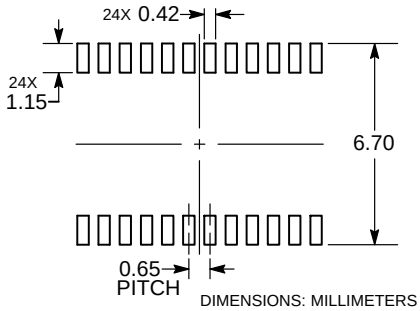

DIMENSIONS: MILLIMETERS

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative