



PROJECT CONCEPT NOTE

CARBON OFFSET UNIT (CoU) PROJECT

Title: 11.925 MW bundle of Small Scale Hydro Power project by Government of Arunachal Pradesh

Version 1.0

Date 27-01-2022

First CoU Issuance Period: 8 years

Date: 01/01/2014 to 31/12/2021



Project Concept Note (PCN)
CARBON OFFSET UNIT (CoU) PROJECT

BASIC INFORMATION	
Title of the project activity	11.925 MW bundle of Small Scale Hydro Power project by Government of Arunachal Pradesh
Scale of the project activity	Small Scale
Completion date of the PCN	27-01-2022
Project participants	Creduce Technologies Private Limited (Representator) Government of Arunachal Pradesh (Project Proponent)
Host Party	India
Applied methodologies and standardized baselines	Applied Baseline Methodology: AMS-I.D : “Grid connected renewable electricity generation”, version 18 Standardized Methodology: Not Applicable.
Sectoral scopes	01 Energy industries (Renewable/Non-Renewable Sources)
Estimated amount of total GHG emission reductions	To be estimated during verification [An ex-ante estimate is 37,607 CoUs per year]

SECTION A. Description of project activity

A.1. Purpose and general description of Carbon offset Unit (CoU) project activity>>

The proposed project activity involves construction and operation of 16 Micro and Small Scale hydel projects in the state of Arunachal Pradesh in India. The project activity has been essentially conceived to generate clean energy by utilizing the hydro potential of the flowing stream. The project is a run of the river type with minimum environmental impacts and will reduce inhabitants' dependence on fossil fuels. This in turn will lead to reduction of greenhouse gas (GHG) emissions by an estimated 37,607 tonnes of CO₂e / year during the crediting period.

Total cumulative installed capacity of the project would be 11.925 MW with an annual gross energy generation of 41,785 MWh. These 16 Micro and Small Scale hydel projects will deliver electricity to the villages in the vicinity, through a mix of National and Regional transmission networks and will also supply power to different commercial customers in the region.

All the Micro and Small Scale hydel projects are being developed by Department of Hydro Power Development (DHPD), Govt. of Arunachal Pradesh and are being managed by DHPD divisions, which have been constituted for each project. These projects will provide energy security and will contribute to the sustainable development of the region. There will also be significant improvement in the quality of life of the villagers.

Purpose of the project activity:

The main purpose of the project activity is to generate renewable electrical energy through sustainable means without causing any negative impact on the environment, and to contribute to climate change mitigation efforts.

Apart from the generation of electrical power, the project also contributes to the following.

- a) Sustainable development of the region.
- b) Rural development, as all the projects are located in rural areas.
- c) Generation of additional employment for the local stakeholders.

The proposed project activity is promoted by Government of Arunachal Pradesh (herein after called as project proponent 'PP'). The proposed project activity is installation and operation of 16 Micro and Small Scale Hydel Power off-grid Projects comprising of multiple units of hydro Turbine and Generators with an aggregated installed capacity of 11.925 MW whose Technical and Commissioning details are shown in **Annexure-I**.

The net generated electricity from the project activity is supplied to the rural population for household and commercial application via grid network. In pre-project scenario, electricity delivered to the grid by the project activity would have otherwise been generated by the operation of fossil fuel-based grid-connected power plants and by the addition of new fossil fuel-based generation sources in the grid. As the nature of the hydro project, no fossil fuel is involved for power generation in the project activity. The electricity produced by the project is directly contributing to climate change mitigation by reducing the anthropogenic emissions of greenhouse gases into the atmosphere by displacing an equivalent amount of power at grid.

Hence, project activity is displacing the estimated annual net electricity generation i.e., 41,785 MWh from the Indian grid system, which otherwise would have been generated by the operation of fossil fuel-based grid-connected power plants. The estimated annual CO₂e emission reductions by the project activity are expected to be 37,607 tCO₂e.

The estimated annual average and the total CO₂e emission reductions by the project activity is expected to be 37,607 tCO₂e, whereas actual emission reduction achieved during the first CoU period shall be submitted as a part of first monitoring and verification.

Since the project activity will generate electricity through hydro energy, a clean renewable energy source it will not cause any negative impact on the environment and thereby contributes to climate change mitigation efforts.

Project's Contribution to Sustainable Development

Indian economy is highly dependent on “Coal” as fuel to generate energy and for production processes. Thermal power plants are the major consumers of coal in India and yet the basic electricity needs of a large section of population are not being met. This results in excessive demands for electricity and places immense stress on the environment.

Changing coal consumption patterns will require a multi-pronged strategy focusing on demand, reducing wastage of energy and the optimum use of renewable energy (RE) sources. This project is a greenfield activity where grid power is the baseline. The renewable power generation is gradually contributing to the share of clean & green power in the grid; however, grid emission factor is still on higher side which defines grid as distinct baseline.

The Government of India has stipulated following indicators for sustainable development in the interim approval guidelines for such projects which are contributing to GHG mitigations. The Ministry of Environment, Forests & Climate Change, has stipulated economic, social, environment and technological well-being as the four indicators of sustainable development. It has been envisaged that the project shall contribute to sustainable development using the following ways:

Social well-being: The project would help in generating direct and indirect employment benefits accruing out of ancillary units for manufacturing of the hydro turbine generator and for maintenance during operation of the project activity. It will lead to development of infrastructure around the project area in terms of improved road network, etc. and will also directly contribute to the development of renewable infrastructure in the region.

Economic well-being: Being a renewable resource, using hydro energy to generate electricity contributes to conservation precious natural resources. The project contributes to the economic sustainability through promotion of decentralization of economic power, leading to diversification of the national energy supply, which is dominated by conventional fuel based generating units. Locally, improvement in infrastructure will provide new opportunities for industries and economic activities to be setup in the area. Apart from getting better employment opportunities, the local people will get better prices for their land, thereby resulting in overall economic development.

Technological well-being: The project activity leads to the promotion of 11.925 MW Micro and Small Scale hydro turbine generators into the region and will promote practice for small scale industries to reduce the dependence on carbon intensive energy supply to meet the captive requirement of electrical energy and also increasing energy availability and improving quality of power under the service area. Hence, the project leads to technological well-being.

Environmental well-being: The project utilizes hydro energy for generating electricity which is a clean source of energy. The project activity will not generate any air pollution, water pollution or solid waste to the environment which otherwise would have been generated through fossil fuels. Also, it will contribute to reduction GHG emissions. Thus, the project causes no negative impact on the surrounding environment contributing to environmental well-being.

With regards to ESG credentials:

At present specific ESG credentials have not been evaluated, however, the project essentially contributes to various indicators which can be considered under ESG credentials. Some of the examples are as follows:

Under Environment:

The following environmental benefits are derived from the project activity:

- Produces renewable electricity without any GHG emissions.
- Run-of-river hydro power plant with little impact on the surrounding ecology.
- No increase in volume of reservoir and no land inundation, hence no disturbance to the natural habitat.

For the PP, energy sale pattern is now based on renewable energy due to the project and it also contributes to GHG emission reduction and conservation of depleting energy sources associated with the project baseline. Hence, project contributes to ESG credentials.

Under Social:

The social well-being is assessed by contribution to improvement in living standards of the local community. The project activity is located in remote villages of industrially backward region in the state of Arunachal Pradesh. The implementation of the project activity would provide job opportunities to the local community; contribute in poverty alleviation of the local community and development of basic amenities to community leading to improvement in living standards of the community.

Under Economics:

Economic well-being refers to additional investment consistent with the needs of the local community. The project activity is associated with a significant investment. This investment is quite significant in a rural area. These activities would contribute to the economic well-being of the local community. The project activity has also provided direct and indirect job opportunities to the local community during construction and shall provide permanent job opportunities during operation. During operation of the project activity, many persons has been employed directly, apart from indirect employment, which would augur well for the economic well- being of the community.

A.2 Do no harm or Impact test of the project activity>>

There was no harm identified from the project and hence no mitigations measures are applicable.

Rational: as per ‘Central Pollution Control Board (Ministry of Environment & Forests, Govt. of India)’, final document on revised classification of Industrial Sectors under Red, Orange, Green and White Categories (07/03/2016), it has been declared that hydro project activity falls under the “White category”. White Category projects/industries do not require any Environmental Clearance such as ‘Consent to Operate’ from PCB as such project does not lead to any negative environmental impacts. Additionally, as per Indian Regulation, Environmental and Social Impact Assessment is not required for Hydro Projects.

A.3. Location of project activity >>


Country : India
 State : Arunachal Pradesh
 District : Dibang Valley, Siang, Lower Siang, Upper Siang

Below table contains location details of the projects.

Sr. No.	Project Name	Lat. Long.	Village	Town/City	District
1	ECHI AFRA MHS	28°44'50"N 95°95'74"E	Anaya	-	Dibang Valley
2	AWAPANI PH-II	28°41'76"N 95°86'56"E	Aliney (LG)	Anini	Dibang Valley
3	ECHITO NALLAH	28°92'49"N 95°97'48"E	Acheso, DambienCircle	-	Dibang Valley
4	RUPA PANI	28°63'92"N 95°93'42"E	Punli	-	Dibang Valley
5	CHU NALLAH	28°99'01"N 95°76'06"E	Mipi	-	Dibang Valley
6	AWAPANI	28°87'32"N 95°93'34"E	Gepuline	-	Dibang Valley
7	ANGGONG SHEP	28°46'38"N 94°48'29.9"E	Janbo Village	Yingkiong	Upper Siang
8	Gossang MHS	28°46'38" N 94°59'49.3" E	Gossang	Moying	Upper Siang
9	Kopu MHS	29°03'9.5"N 94°54'24.2" E	Kopu	Tuting	Upper Siang
10	Sillingiri MHS	29.120422 N 94.959417 E	Gelling	Tuting	Upper Siang
11	Ngaming MHS	28°58'17.3"N 94°56'28.2" E	Ngaming	Tuting	Upper Siang
12	Singha MHS	28° 58' 17.3" N 94° 56' 28.2" E	Singha	Tuting	Upper Siang
13	Mayung MHS	29.125422 N 94.969516 E	Mayung	Tuting	Upper Siang
14	Subbung SHEP	28°27'40"N 94°54'40"E	Supsing & Yingku	Boleng	Siang
15	Rina SHEP	27°59'41.9"N 94°55'29.1"E	Rina Village	Koyu Circle	Lower Siang
16	Silli MHS	28°13'47.4" N 95°13'30.3" E	Silli	Silli	Upper Siang

The representative location map of the project locations is indicated below:

(Courtesy: google images and www.mapofindia.com)

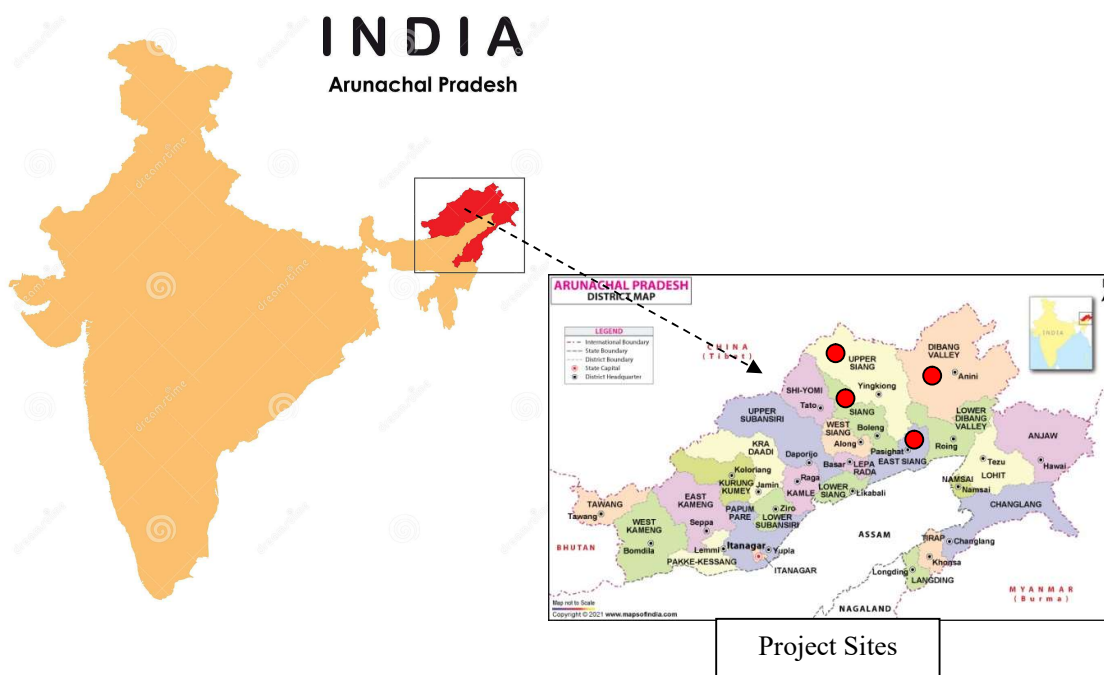

A.4. Technologies/measures>>

The project activity involves various technologies of hydro turbine generators with internal electrical lines connecting the project activity with local evacuation facility. Project-wise Technical Specifications can be referred in the below table:

Sr. No.	Project Name	Unit Capacity (kW)	No. of units	Total Capacity (MW)
1	ECHI AFRA MHS	200	2	0.4
2	AWAPANI PH-II	250	2	0.5
3	ECHITO NALLAH	20	2	0.04
4	RUPA PANI	20	2	0.04
5	CHU NALLAH	15	2	0.03
6	AWAPANI	250	2	0.5
7	ANGGONG SHEP	1500	3	4.5
8	Gossang MHS	250	2	0.5
9	Kopu MHS	250	1	0.25
10	Sillingiri MHS	50	1	0.05
11	Ngaming MHS	50	1	0.05
12	Singha MHS	30	1	0.03
13	Mayung MHS	5	1	0.005
14	Subbung SHEP	1500	2	3
15	Rina SHEP	1000	2	2
16	Silli MHS	30	1	0.03
Total Micro and Small Scale Hydro Power bundle (in MW)				11.925

The hydro turbines machine specifications and their commissioning dates can be found in Annexure I.

In the absence of the project activity the equivalent amount of electricity would have otherwise been generated by the operation of fossil fuel-based grid-connected power plants and fed into unified India grid system, hence baseline scenario of the project activity is the grid-based electricity system, which is also the pre-project scenario as discussed in the previous section.

A.5. Parties and project participants >>

Party (Host)	Participants
India	<p>Creduce Technologies Private Limited (Representator)</p> <p>Contact person: Shailendra Singh Rao Mobile: +91 9016850742, 9601378723 Address: 2-O-13,14 Housing Board Colony, Banswara, Rajasthan - 327001, India</p> <p>Government of Arunachal Pradesh (Developer) Address: Vidyut Bhawan, Itanagar, Arunachal Pradesh 791111, India.</p>

The project activity involves setting up of a new plant to harness the green power from Hydro energy and to supply the produced power to the grid. In the absence of the project activity, the equivalent amount of power would have been supplied by the Indian grid, which is fed mainly by fossil fuel fired plants. Hence, the baseline for the project activity is the equivalent amount of power produced at the Indian grid.

A.7. Debundling>>

This project activity is not a debundled component of a larger project activity.

SECTION B. Application of methodologies and standardized baselines

B.1. References to methodologies and standardized baselines >>

SECTORAL SCOPE:

01, Energy industries (Renewable/Non-renewable sources)

TYPE:

I - Renewable Energy Projects

CATEGORY:

AMS. I.D. (Title: “Grid connected renewable electricity generation”, version 18)

B.2. Applicability of methodologies and standardized baselines >>

The project activity involves generation of grid connected electricity from the construction and operation of a new hydro power-based power project. The project activity has installed capacity of 11.925 MW which will qualify for a small-scale project activity under Type-I of the Small-Scale methodology. The project status is corresponding to the methodology AMS-I.D., version 18 and applicability of methodology is discussed below:

Applicability Criterion	Project Case
1. This methodology comprises renewable energy generation units, such as photovoltaic, hydro, tidal/wave, wind, geothermal and renewable biomass: (a) Supplying electricity to a national or a regional grid; or (b) Supplying electricity to an identified consumer facility via national/regional grid through a contractual arrangement such as wheeling.	The project activity involves setting up of a renewable energy (hydro) generation plant that exports electricity to the fossil fuel dominated electricity grid (Indian Grid system). Thus, the project activity meets this applicability conditions.
2. Illustration of respective situations under which each of the methodology (i.e., AMS-I.D: Grid connected renewable electricity generation”, AMS-I.F: Renewable electricity generation for captive use and mini-grid” and AMS-I.A: Electricity generation by the user) applies is included in Table 2	According to the point 1 of the Table 2 in the methodology – “Project supplies electricity to a national/ regional grid” is applicable under AMS I.D. As the project activity supplies the electricity to Indian Grid system grid which is a regional grid, the methodology AMS-I.D. is applicable.
3. This methodology is applicable to project activities that: (a) Install a Greenfield plant; (b) Involve a capacity addition in (an) existing plant(s); (c) Involve a retrofit of (an) existing plant(s); (d) Involve a rehabilitation of (an) existing plant(s); or (e) Involve a replacement of (an) existing plant(s).	The Project activity involves the installation of new power plant at a site where there was no renewable energy power plant operating prior to the implementation of the project activity. Thus, Project activity is a Greenfield plant and satisfies this applicability condition (a).

Applicability Criterion	Project Case
<p>4. Hydro power plants with reservoirs that satisfy at least one of the following conditions are eligible to apply this methodology:</p> <ul style="list-style-type: none"> (a) The project activity is implemented in existing reservoir, with no change in the volume of the reservoir; or (b) The project activity is implemented in existing reservoir, where the volume of the reservoir(s) is increased and the power density as per definitions given in the project emissions section, is greater than 4 W/m². (c) The project activity results in new reservoirs and the power density of the power plant, as per definitions given in the project emissions section, is greater than 4 W/m². 	<p>As the project activity is a run-off river type hydro power plant, this criterion is not relevant for the project activity.</p>
<p>5. If the new unit has both renewable and non-renewable components (e.g., a wind/diesel unit), the eligibility limit of 15 MW for a small-scale CDM project activity applies only to the renewable component. If the new unit co-fires fossil fuel, the capacity of the entire unit shall not exceed the limit of 15 MW.</p>	<p>The cumulative capacity of the project activity is 11.925 MW with no provision of Co-firing fossil fuel. Hence, meeting with this criterion.</p>
<p>6. Combined heat and power (co-generation) systems are not eligible under this category</p>	<p>This is not relevant to the project activity as the project involves only hydro power generating units.</p>
<p>7. In the case of project activities that involve the capacity addition of renewable energy generation units at an existing renewable power generation facility, the added capacity of the units added by the project should be lower than 15 MW and should be physically distinct from the existing units.</p>	<p>There is no other existing renewable energy power generation facility at the project site. Therefore, this criterion is not applicable.</p>
<p>8. In the case of retrofit or replacement, to qualify as a small-scale project, the total output of the retrofitted or replacement power plant/unit shall not exceed the limit of 15 MW.</p>	<p>The project activity is a new installation, it does not involve any retrofit measures nor any replacement and hence is not applicable for the project activity.</p>
<p>9. In the case of landfill gas, waste gas, wastewater treatment and agro-industries projects, recovered methane emissions are eligible under a relevant Type III category. If the recovered methane is used for electricity generation for supply to a grid, then the baseline for the electricity component shall be in accordance with procedure prescribed under this methodology. If the recovered methane is used for heat generation or cogeneration other applicable Type-I methodologies such as “AMS I. C.: Thermal energy production with or without electricity” shall be explored.</p>	<p>This is not relevant to the project activity as the project involves only hydro power generating units.</p>

Applicability Criterion	Project Case
10. In case biomass is sourced from dedicated plantations, the applicability criteria in the tool “Project emissions from cultivation of biomass” shall apply.	This is not relevant to the project activity as the project involves only hydro power generating units.

B.3. Applicability of double counting emission reductions >>

There is no double accounting of emission reductions in the project activity due to the following reasons:

- Project is uniquely identifiable based on its location coordinates,
- Project has dedicated commissioning certificate and connection point,
- Project is associated with energy meters which are dedicated to the consumption point for project developer

B.4. Project boundary, sources and greenhouse gases(GHGs)>>

As per applicable methodology AMS-I.D. Version 18, “The spatial extent of the project boundary includes the project power plant and all power plants connected physically to the electricity system that the project power plant is connected to.”

Thus, the project boundary includes the Hydro Turbine Generators and the Indian grid system.

Source		Gas	Included?	Justification/Explanation
Baseline	Grid connected electricity generation	CO ₂	Yes	CO ₂ emissions from electricity generation in fossil fuel fired power plants
		CH ₄	No	Minor emission source
		N ₂ O	No	Minor emission source
		Other	No	No other GHG emissions were emitted from the project
Project	Greenfield Hydro Power Project Activity	CO ₂	No	No CO ₂ emissions are emitted from the project
		CH ₄	No	Project activity does not emit CH ₄
		N ₂ O	No	Project activity does not emit N ₂ O
		Other	No	No other emissions are emitted from the project

B.5. Establishment and description of baseline scenario >>

This section provides details of emission displacement rates/coefficients/factors established by the applicable methodology selected for the project.

As per para 19 of the approved consolidated methodology AMS-I.D. Version 18, if the project activity is the installation of a new grid-connected renewable power plant/unit, the baseline scenario is the following:

“The baseline scenario is that the electricity delivered to the grid by the project activity would have otherwise been generated by the operation of grid-connected power plants and by the addition of new generation sources into the grid”.

The project activity involves setting up of a new hydro power plant to harness the green power from hydro energy and to use for sale to national grid i.e., India grid system through PPA arrangement. In the absence of the project activity, the equivalent amount of power would have been generated by the operation of grid-connected fossil fuel-based power plants and by the addition of new fossil fuel-based generation sources into the grid. The power produced at grid from the other conventional sources which are predominantly fossil fuel based. Hence, the baseline for the project activity is the equivalent amount of power produced at the Indian grid.

A "grid emission factor" refers to a CO₂ emission factor (tCO₂/MWh) which will be associated with each unit of electricity provided by an electricity system. The UCR recommends an emission factor of 0.9 tCO₂/MWh for the 2014-2020 years as a fairly conservative estimate for Indian projects not previously verified under any GHG program. Also, for the vintage 2021, the combined margin emission factor calculated from CEA database in India results into higher emission than the default value. Hence, the same emission factor has been considered to calculate the emission reduction under conservative approach.

Net GHG Emission Reductions and Removals

$$\text{Thus, } ER_y = BE_y - PE_y - LE_y$$

Where:

$$\begin{aligned} ER_y &= \text{Emission reductions in year } y \text{ (tCO}_2\text{/y)} \\ BE_y &= \text{Baseline Emissions in year } y \text{ (t CO}_2\text{/y)} \\ PE_y &= \text{Project emissions in year } y \text{ (tCO}_2\text{/y)} \\ LE_y &= \text{Leakage emissions in year } y \text{ (tCO}_2\text{/y)} \end{aligned}$$

Baseline Emissions

Baseline emissions include only CO₂ emissions from electricity generation in power plants that are displaced due to the project activity. The methodology assumes that all project electricity generation above baseline levels would have been generated by existing grid-connected power plants and the addition of new grid-connected power plants.

The baseline emissions are to be calculated as follows:

$$BE_y = EG_{PJ,y} \times EF_{\text{grid},y}$$

Where:

BE_y	=	Baseline emissions in year y (t CO ₂)
$EG_{PJ,y}$	=	Quantity of net electricity generation that is produced and fed into the grid as a result of the implementation of this project activity in year y (MWh)
$EF_{grid,y}$	=	UCR recommended emission factor of 0.9 tCO ₂ /MWh has been considered, this is conservative as compared to the combined margin grid emission factor which can be derived from Database of Central Electricity Authority (CEA), India. (Reference: General Project Eligibility Criteria and Guidance, UCR Standard, page 4)

Project Emissions

As per paragraph 39 of AMS-I.D. (version 18, dated 28/11/2014), for most renewable energy project activities emission is zero.

As per applied methodology only emission associated with the fossil fuel combustion, emission from operation of DG Set, would be accounted for the project emission on actuals.

Diesel consumption:

The project also involves consumption of minor quantity of Diesel in standby DG Set. So, the formula used to calculate the project emissions due to diesel consumption is provided below:

$$PE_{\text{Diesel}} = \sum DC_y \times P \times NCV_{\text{Diesel}} \times EF_{\text{CO2Diesel}}$$

Where:

PE_{Diesel} = Project Emission due to Diesel consumed during monitoring period in DG set

DC_y = Diesel Consumption in Liters (L)

P = Density of Diesel (0.86Kg/Lit)

NCV_{Diesel} = Net Calorific Value of Diesel

$EF_{\text{CO2Diesel}}$ = IPCC 2006 Emission factor for Diesel

Hence, $PE_y = PE_{\text{Diesel}}$

Leakage

As per paragraph 22 of AMS-I.D. version-18, 'If the energy generating equipment is transferred from another activity, leakage is to be considered.' In the project activity, there is no transfer of energy generating equipment and therefore the leakage from the project activity is considered as zero.

Hence, $LE_y = 0$

The actual emission reduction achieved during the first CoU period shall be submitted as a part of first monitoring and verification. However, for the purpose of an ex-ante estimation, following calculation has been submitted:

Estimated annual baseline emission reductions (BE_y)

$$= 41,785 \text{ MWh/year} \times 0.9 \text{ tCO}_2/\text{MWh}$$

$$= 37,607 \text{ tCO}_2/\text{year (i.e., 37,607 CoUs/year)}$$

B.6. Prior History>>

The project activity is a small-scale hydro project and was not applied under any other GHG mechanism prior to this registration with UCR. Also, project has not been applied for any other environmental crediting or certification mechanism. Hence project will not cause double accounting of carbon credits (i.e., COUs).

B.7. Changes to start date of crediting period >>

There is no change in the start date of crediting period i.e. 01/01/2014. However, for projects commissioned after 01/01/2014, the start date of crediting period will be from the actual date of commissioning mentioned in Annexure I.

B.8. Permanent changes from PCN monitoring plan, applied methodology or applied standardized baseline >>

Not applicable.

B.9. Monitoring period number and duration>>

First Monitoring Period: 8 years

01/01/2014 to 31/12/2021 (inclusive of both dates)

B.8. Monitoring plan>>

Data and Parameters available at validation (ex-ante values):

Data / Parameter	UCR recommended emission factor
Data unit	tCO ₂ /MWh
Description	A "grid emission factor" refers to a CO ₂ emission factor (tCO ₂ /MWh) which will be associated with each unit of electricity provided by an electricity system. The UCR recommends an emission factor of 0.9 tCO ₂ /MWh for the 2014 - 2020 years as a fairly conservative estimate for Indian projects not previously verified under any GHG program. Hence, the same emission factor has been considered to calculate the emission reduction under conservative approach.
Source of data	https://a23e347601d72166dcd6-16da518ed3035d35cf0439f1cdf449c9.ssl.cf2.rackcdn.com//Documents/UCRStandardNov2021updatedVer2_301121081557551620.pdf
Value applied	0.9
Measurement methods and procedures	-
Monitoring frequency	Ex-ante fixed parameter
Purpose of Data	For the calculation of Emission Factor of the grid
Additional Comment	The combined margin emission factor as per CEA database (current version 16, Year 2021) results into higher emission factor. Hence for 2021 vintage UCR default emission factor remains conservative.

Data / Parameter	P
Data unit	kg/lit
Description	Density of diesel
Source of data	http://www.fast-tek.com/TM104.pdf http://www.iocl.com/Products/DieselSpecifications.pdf
Value applied	0.860
Measurement methods and procedures	Fixed Value has been taken from the publicly available data source.
Purpose of Data	Calculation of project emission
Comments	This parameter is fixed ex-ante for the entire crediting period.

Data / Parameter	NCV _{diesel,y}
Data unit	GJ/Ton
Description	Net calorific value of the Diesel in year y
Source of data	As options a, b & c are not available, the project proponent chooses option d i.e., IPCC default values at the upper limit of the uncertainty at

	a 95% confidence interval as provided in Table 1.2 of Chapter 1 of Vol. 2 (Energy) of the 2006 IPCC Guidelines on National GHG Inventories and is fixed Ex-ante. This is in accordance to the “Tool to calculate project or leakage CO2 emissions from fossil fuel combustion”, latest version applied.
Value applied	41.80
Measurement methods and procedures	IPCC Default Value is considered.
Purpose of Data	Calculation of project emission
Comments	This parameter is fixed ex-ante for the entire crediting period.

Data / Parameter	EF _{CO₂,diesel,y}
Data unit	tCO ₂ e/TJ
Description	CO2 emission factor of diesel in year y
Source of data	IPCC default value
Value applied	74.8
Measurement methods and procedures	As options a, b & c are not available, the project proponent chooses option d i.e., IPCC default values at the upper limit of the uncertainty at a 95% confidence interval as provided in Table 1.4 of Chapter 1 of Vol. 2 (Energy) of the 2006 IPCC Guidelines on National GHG Inventories and is fixed Ex-ante. This is in accordance to the “Tool to calculate project or leakage CO2 emissions from fossil fuel combustion” latest version applied.
Purpose of Data	Calculation of project emission
Comments	This parameter is fixed ex-ante for the entire crediting period.

Data and Parameters to be monitored (ex-post monitoring values):

Data / Parameter	EG _{BL, y}
Data unit	MWh/year
Description	Quantity of net electricity supplied to the grid as a result of the implementation of the project activity in year y (MWh)
Source of data	Monthly Joint Meter Readings (JMRs)
Measurement procedures (if any):	<p>Data Type: Measured</p> <p>Monitoring equipment: Energy Meters are used for monitoring</p> <p>Recording Frequency: Continuous monitoring and Monthly recording from Energy Meters, Summarized Annually</p> <p>Archiving Policy: Paper & Electronic</p> <p>Calibration frequency: 5 years (as per CEA provision)</p> <p>Generally, the calculation is done by the Authority/Discom and the project proponent has no control over the authority for the calculation. Therefore, based on the joint meter reading certificates/credit notes, the project shall raise the invoice for monthly payments.</p>

	<p>In case the monthly JMR provides net export quantity, the same will be directly considered for calculation. However, if the JMR does not directly provide “net electricity” units, then quantity of net electricity supplied to the grid shall be calculated using the parameters reflected in the JMR.</p> <p>For example, the difference between the measured quantities of the grid export and the import will be considered as net export:</p> $EG_{PJ,y} = EG_{Export} - EG_{Import}$
Measurement Frequency:	Monthly
Value applied:	To be applied as per actual data
QA/QC procedures applied:	<p>Calibration of the Main meters will be carried out once in five (5) years as per National Standards (as per the provision of CEA, India) and faulty meters will be duly replaced immediately as per the provision of power purchase agreement.</p> <p>Cross Checking: Quantity of net electricity supplied to the grid will be cross checked from the invoices raised by the project participant to the grid.</p>
Purpose of data:	The Data/Parameter is required to calculate the baseline emission.
Any comment:	All the data will be archived till a period of two years from the end of the crediting period.

Data / Parameter	DC _y
Data unit	Liters
Description	Diesel consumption by the standby DG set in year y
Source of data	Plant Records
Measurement methods and procedures	The diesel quantity available in the diesel storage tanks is recorded daily by PP in the plant log book. The diesel consumption has been recorded in the logbook in liters. However, based on the density of diesel of about 0.86 kg/liter, the diesel consumption in tons is calculated.
Frequency of monitoring/recording	Continuously and recorded monthly basis.
Value monitored	To be monitored as per actuals
Monitoring equipment	Calculated
QA/QC procedures to be applied	The measured data will be cross checked with total diesel procurement using payment receipts.
Purpose of the data	Calculation of project emissions.
Calculation method	Data Type: Measured & Calculated Data Archiving: Paper/ Electronic.
Comments	The data would be archived up to two years after the end of crediting period.

ANNEXURE-I (Technical Specification and Commissioning Details of each unit of the projects)

Project Name	ECHI AFRA MHS		AWAPANI PH-II		ECHITO NALLAH		RUPA PANI		CHU NALLAH	
Unit No.	1	2	1	2	1	2	1	2	1	2
Capacity (in kW)	200	200	250	250	20	20	20	20	15	15
Type of Turbine	Turgo Impulse		Horizontal Francis		Cross Flow Turbine		Cross Flow Turbine		Turgo Impulse	
Date of Commission	2006		2006		2011		2011		2012	
Main Meter Serial No.	Genrator In built Panel meter		Genrator In built Panel meter		Genrator In built Panel meter		Genrator In built Panel meter		Genrator In built Panel meter	
Main Meter Make										

Project Name	AWAPANI		ANGGONG SHEP			Gossang MHS		Kopu MHS	Sillingiri MHS	Ngaming MHS
Unit No.	1	2	1	2	3	1	2	1	1	1
Capacity (in kW)	250	250	1500	1500	1500	250	250	250	50	50
Type of Turbine	Horizontal Francis		Francis Turbine			Horizontal Francis		Hor. Kaplan Tur.	Hor. Crossflow Tur.	Hor. Crossflow Tur.
Date of Commission	2015		18-01-2010			18-01-2010		2004	2008	2008
Main Meter Serial No.	Genrator In built Panel meter		ER 300P	ER 300P	ER 300P	-	-	-	-	-
Main Meter Make			L&T	L&T	L&T	Trinity	Trinity	Trinity	Ytek	Trinity

Project Name	Singha MHS	Mayung MHS	Subbung SHEP		Rina SHEP		Silli MHS
Unit No.	1	1	1	2	1	2	1
Capacity (in kW)	30	5	1500	1500	1000	1000	30
Type of Turbine	Hor. Crossflow Tur.	Hor. Crossflow Tur.	Horizontal Francis Turbine		Hydraulic Turbine		Cross-Flow Turbine
Date of Commission	2008	2011	24-12-2018		23-01-2011		11-12-2002
Main Meter Serial No.	-	-	9825130	9825131	790278		307616
Main Meter Make	Trinity	Trinity	L&T	L&T	Maxwell India		BENTEX RK